ROUGH GROOVED SURFACE SIGN

ILLINOIS STANDARD W8-I107 SIGN PANEL TYPE 1



COLOR: LEGEND AND BORDER - BLACK NON-RELFLECTIVE BACKGROUND - ORANGE REFLECTORIZED

SIGN	DIMENSIONS								
SIZE	Α	В	С	D	E	F	G	Н	
1200×1200	1200	600	75	850	825	150	325	88	
(48×48)	(48.0)	(24.1)	(3.0)	(34.0)	(33.0)	(6.0)	(13.0)	(3.5)	

SIGN SIZE	SERIES LINES			MARGIN	BORDER	BLANK STD.	
	1	2	3			3,0.	
1200×1200 (48×48)	7C	7C	7C	20 (0 . 8)	30 (1 . 2)	B4-48D	

ALL DIMENSIONS IN INCHES.

GENERAL NOTES


SIGN PANELS AND FACE MATERIALS SHALL BE ACCORDING TO SECTION 720 OF THE STANDARD SPECIFICATIONS

METAL POSTS SHALL BE IN ACCORDANCE WITH STD. 720011.

ALL MOUNTING HARDWARE SHALL BE ALUMINUM, STAINLESS STEEL, ZINC OR CADMIUM PLATED STEEL AND SHALL BE INCLUDED TO THE COST OF THE INSTALLATION.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC)

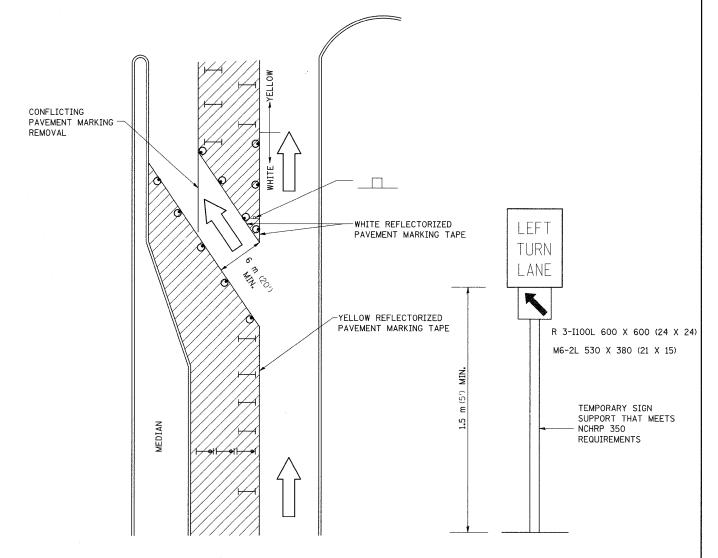


LEGEND



REVISED


REVISED






DAY OPERATIONS, ALL LIGHTS WILL BE MONODIRECTIONAL.

GENERAL NOTES



REFLECTORIZED TEMPORARY PAVEMENT MARKING TAPE SHALL BE PLACED THROUGHOUT THE BARRICADED AREA OF EACH BAY WHERE THE CLOSURE TIME IS GREATER THAN



SIGN (SEE DETAIL)

THIS APPLICATION ALSO APPLIES WHEN WORK IS BEING PERFORMED IN THE RIGHT LANE(S) AND THE RIGHT TURN BAY IS TO REMAIN OPEN. UNDER THIS CONDITION, "RIGHT TURN LANE" R3-100 600 \times 600 (24 X 24) AND M6-2R 530 X 380 (21 X 15) SHALL BE USED.



LONGITUDINAL DIMENSIONS MAY BE ADJUSTED TO FIT FIELD CONDITIONS.

TYPE I OR II CHECK BARRICADE WITH STEADY

TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) SHALL BE INCLUDED IN THE COST SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

THESE CONTROLS SHALL SUPPLEMENT MAINLINE TRAFFIC CONTROL FOR LANE CLOSURES.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS REVISED - 10-15-04

COUNTY TOTAL SHEE NO. REGION 2 / DISTRICT 2 STANDARD 81-(1-2,1,2-2)RS-1&M ROCK ISLAND 246 236 CONTRACT NO. 64A97 TO STA.