
## **EXPANSION JOINT REHABILITATION DETAIL**

## GENERAL NOTES:

- 1. THE NEW HMA OVERLAY SHALL BE SAWED, REMOVED, AND THE JOINT AREA CLEANED. PRIOR TO PLACING THE HOT-POURED JOINT SEALER THE JOINT SHALL BE BLOWN OUT WITH COMPRESSED AIR.
- 2. THIS WORK SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER FOOT FOR EXPANSION JOINT REHABILITATION.

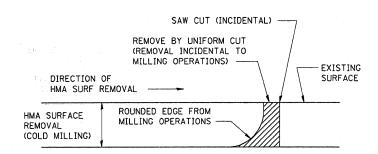


NOTE: WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE,
THEN A SAW CUT SHALL BE USED TO MANUFACTURE
A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL.
THE ENGINEER SHALL BE THE SOLE JUDGE
CONCERNING THE USE OF THIS DETAIL

## HMA DETAIL AT BUTT JOINTS


CONTRACT NO. 66426

\*(135)RS-3 & (136)RS-2

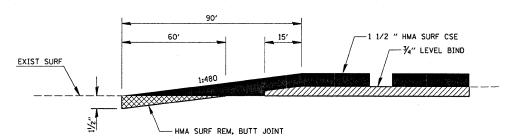

## HMA SURFACE REMOVAL BUTT JOINT

302+24 TO 303+14 615+47 TO 616+37 617+30 TO 618+20 694+42.5 TO 695+32.5 696+14.5 TO 697+04.5

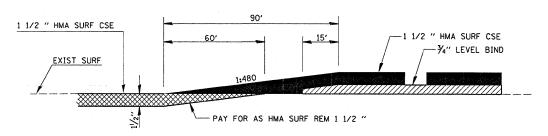

HMA TAPER

867+74 TO 868+64