


**FORM BRACES FOR
STAGE CONSTRUCTION**

When cantilever forming brackets are used, the work shall be done according to Article 503.06(b) of the Standard Specifications, except as modified below and in the details shown on this sheet.

The finishing machine rails shall be placed on the top flange of the exterior beams.

The beams or girders, supporting cantilever forming brackets, shall be tied together at 4 foot intervals.

For Standard construction, or Stage Construction the Hardwood bracing materials shall be placed as shown between webs of beams in each bay.

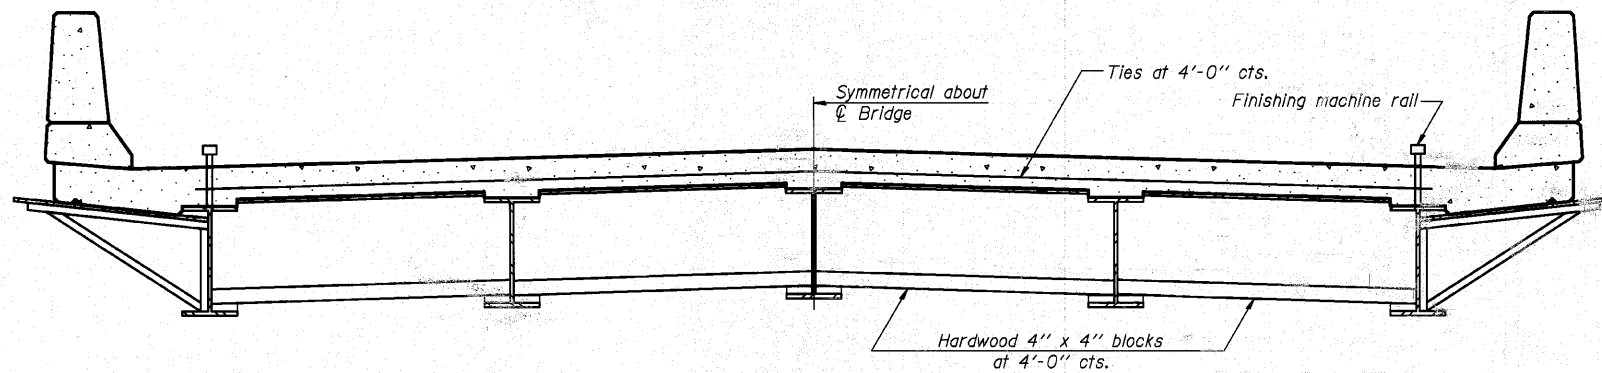

**FORM BRACES FOR
STANDARD CONSTRUCTION**

**CANTILEVER FORMING BRACKETS
FOR SUPERSTRUCTURES WITH
W27 BEAMS AND SMALLER
STRUCTURE NO. 045-3020**

| |
|----------------|
| DESIGNED - AEU |
| CHECKED - DLS |
| DRAWN - AWH |
| CHECKED - AEU |

WBK WILLS BURKE KELSEY ASSOCIATES LTD.
116 West Main Street, Suite 201
St. Charles, Illinois 60174
(630) 443-7755

| | | | | | |
|---------------------------|--------|----------------|------------------|--------------|-----------|
| SHEET NO. 20 21 SHEETS | F.A.U. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
| | 2332 | 03-14185-02-BR | KANE | 73 | 44 |
| CONTRACT NO. 63521 | | | | | |
| FED. ROAD DIST. NO. | | ILLINOIS | FED. AID PROJECT | | |