



TYPICAL MEDIAN TREATMENTS

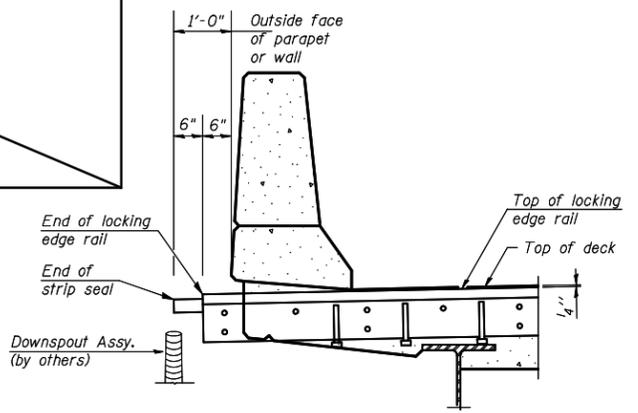


AT CURB, PARAPET OR WALL

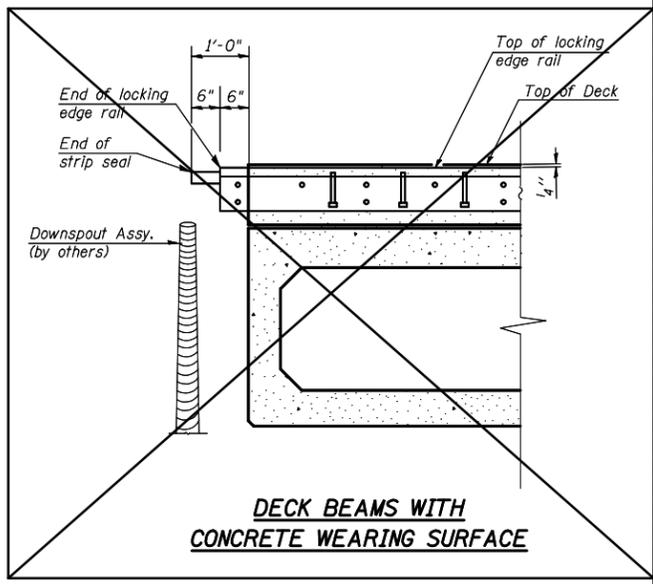


DECK BEAMS WITH CONCRETE WEARING SURFACE

TYPICAL END TREATMENTS

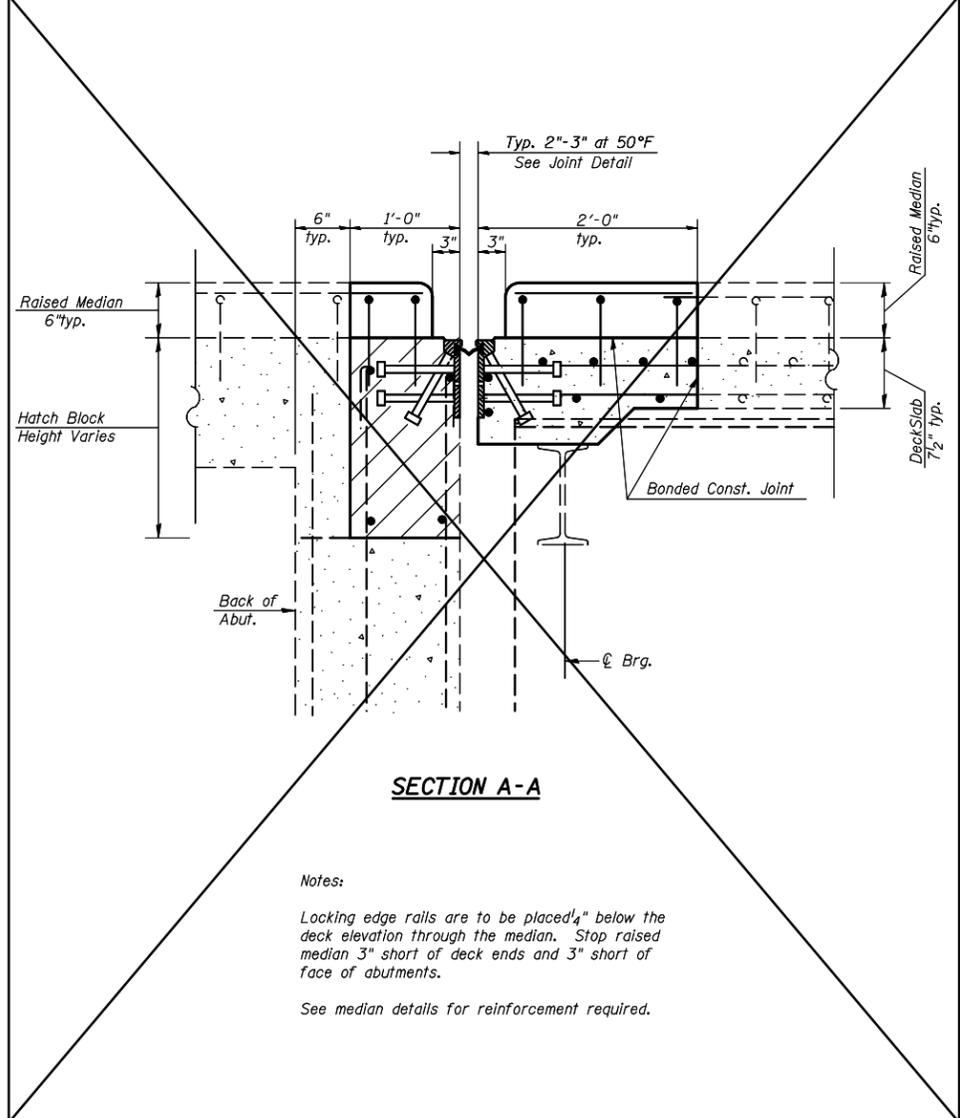


SECTION A-A

Notes:  
 Locking edge rails are to be placed 1/4" below the deck elevation through the median. Stop raised median 3" short of deck ends and 3" short of face of abutments.  
 See median details for reinforcement required.

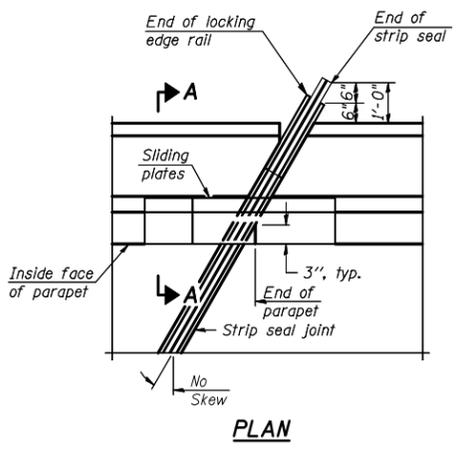

PLAN

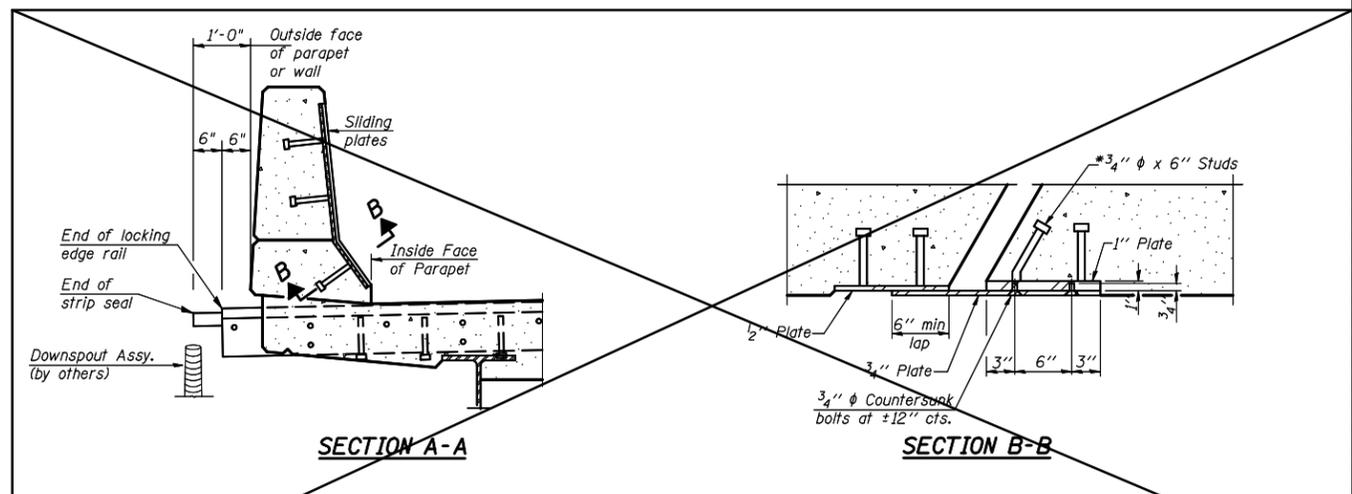

SECTION A-A

SECTION B-B

POINT BLOCK DETAILS  
 (for skews > 30°)

FILE NAME =	USER NAME = ceorlockjd	DESIGNED -	REVISED -
ce:\pwork\p\WID01\CEARLOCKJD\dms87656\0910866-Hyd.dgn		DRAWN -	REVISED -
PLOT SCALE = 40.0000' / IN.		CHECKED -	REVISED -
PLOT DATE = 2/6/2009		DATE -	REVISED -

STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION

DISTRICT 5 PREFORMED JOINT STRIP SEAL DETAILS

SCALE: SHEET NO. 15 OF 17 SHEETS STA. TO STA.

DISTRICT 5 DETAIL NO. 52000AAA

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
697	46RS-8&1RS-2&46BDR		75	54
			CONTRACT NO. 90866	
ILLINOIS FED. AID PROJECT				