

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NORTH EDGE OF SHOULDER


Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.55	-22.00	584.52
A1	253+96.55	-22.00	584.66
A2	254+06.55	-22.00	584.80
E. End W. Appr. Pav't.	254+16.55	-22.00	584.94

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.55	-12.00	584.73
A1	253+96.55	-12.00	584.87
A2	254+06.55	-12.00	585.01
E. End W. Appr. Pav't.	254+16.55	-12.00	585.15

W.B. ROADWAY & PGL

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.55	0.00	584.92
A1	253+96.55	0.00	585.06
A2	254+06.55	0.00	585.20
E. End W. Appr. Pav't.	254+16.55	0.00	585.34

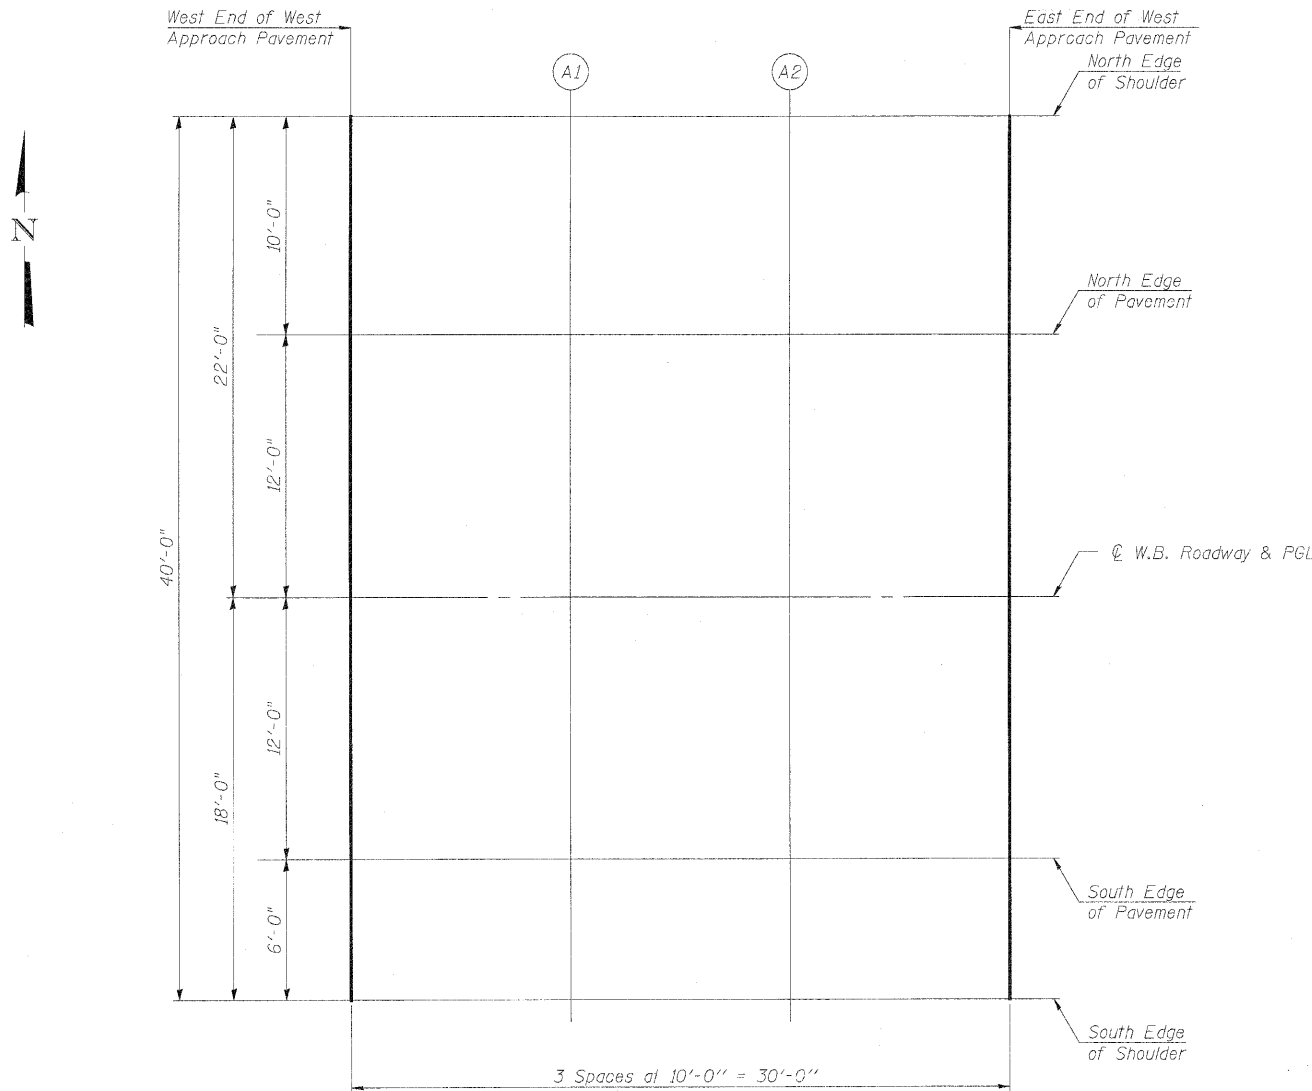

SOUTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.55	12.00	584.73
A1	253+96.55	12.00	584.87
A2	254+06.55	12.00	585.01
E. End W. Appr. Pav't.	254+16.55	12.00	585.15

SOUTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.55	18.00	584.61
A1	253+96.55	18.00	584.75
A2	254+06.55	18.00	584.89
E. End W. Appr. Pav't.	254+16.55	18.00	585.03

Note:
Offset is measured from W.B. Roadway & PGL.
Negative number indicates north of C, Positive number
indicates south of C.

TOP OF W.B. ROADWAY
WEST APPROACH SLAB ELEVATIONS
STRUCTURE NO. 081-0022 (E.B.)
STRUCTURE NO. 081-0023 (W.B.)

DESIGNED	LC
CHECKED	MCT
DRAWN	ASJ
CHECKED	MCT



INFRASTRUCTURE
ENGINEERING | INCORPORATED
33 West Monroe | Suite 1540 | Chicago, IL 60603
P 312.425.9560 | F 312.425.9564 | www.infrastructure-eng.com

SHEET NO. 9	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
54 SHEETS	280	81-1(HB-2)R	ROCK ISLAND	503	291
CONTRACT NO. 64815					
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT					