

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NORTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.30	-22.00	587.19
A3	255+87.30	-22.00	587.32
A4	255+97.30	-22.00	587.46
E. End E. Appr. Pav't.	256+07.30	-22.00	587.58

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.30	-12.00	587.40
A3	255+87.30	-12.00	587.53
A4	255+97.30	-12.00	587.66
E. End E. Appr. Pav't.	256+07.30	-12.00	587.79

℄ W.B. ROADWAY & PGL

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.30	0.00	587.58
A3	255+87.30	0.00	587.72
A4	255+97.30	0.00	587.85
E. End E. Appr. Pav't.	256+07.30	0.00	587.98

SOUTH EDGE OF PAVEMENT


Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.30	12.00	587.40
A3	255+87.30	12.00	587.53
A4	255+97.30	12.00	587.66
E. End E. Appr. Pav't.	256+07.30	12.00	587.79

SOUTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.30	18.00	587.27
A3	255+87.30	18.00	587.41
A4	255+97.30	18.00	587.54
E. End E. Appr. Pav't.	256+07.30	18.00	587.67

Note:
Offset is measured from ℄ W.B. Roadway & PGL.
Negative number indicates north of ℄, Positive number
indicates south of ℄.

TOP OF W.B. ROADWAY
EAST APPROACH SLAB ELEVATIONS
STRUCTURE NO. 081-0022 (E.B.)
STRUCTURE NO. 081-0023 (W.B.)

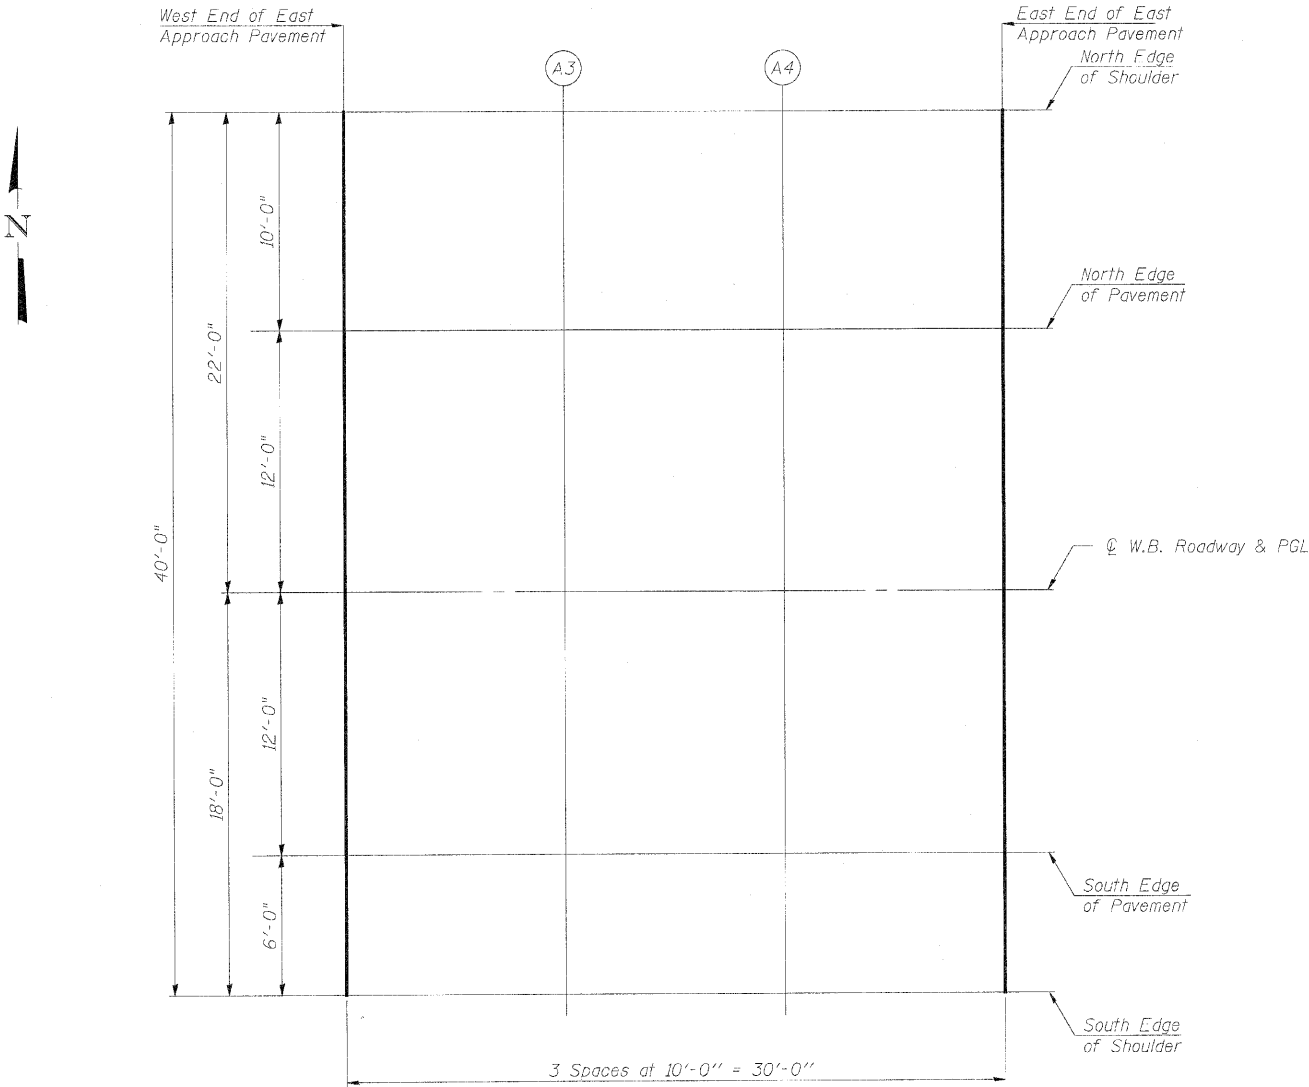

PLAN

DESIGNED	LC
CHECKED	MCT
DRAWN	ASJ
CHECKED	MCT



INFRASTRUCTURE
ENGINEERING INCORPORATED
33 West Monroe | Suite 1540 | Chicago, IL 60603
P 312.425.9560 | F 312.425.9564 | www.infrastructure-eng.com

SHEET NO. 10	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
54 SHEETS	280	81-1(HB-2)R	ROCK ISLAND	503	292
CONTRACT NO. 64815					
FED. ROAD DIST. NO. _ ILLINOIS FED. AID PROJECT					