

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NORTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.56	-18.00	584.61
A1	253+96.56	-18.00	584.75
A2	254+06.56	-18.00	584.89
E. End W. Appr. Pav't.	254+16.56	-18.00	585.03

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.56	-12.00	584.73
A1	253+96.56	-12.00	584.87
A2	254+06.56	-12.00	585.01
E. End W. Appr. Pav't.	254+16.56	-12.00	585.15

☉ E.B. ROADWAY & PGL

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.56	0.00	584.92
A1	253+96.56	0.00	585.06
A2	254+06.56	0.00	585.20
E. End W. Appr. Pav't.	254+16.56	0.00	585.34

SOUTH EDGE OF PAVEMENT


Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.56	12.00	584.73
A1	253+96.56	12.00	584.87
A2	254+06.56	12.00	585.01
E. End W. Appr. Pav't.	254+16.56	12.00	585.15

SOUTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End W. Appr. Pav't.	253+86.56	22.00	584.52
A1	253+96.56	22.00	584.66
A2	254+06.56	22.00	584.80
E. End W. Appr. Pav't.	254+16.56	22.00	584.94

Note:
Offset is measured from ☉ E.B. Roadway & PGL.
Negative number indicates north of ☉. Positive number
indicates south of ☉.

TOP OF E.B. ROADWAY
WEST APPROACH SLAB ELEVATIONS
STRUCTURE NO. 081-0022 (E.B.)
STRUCTURE NO. 081-0023 (W.B.)

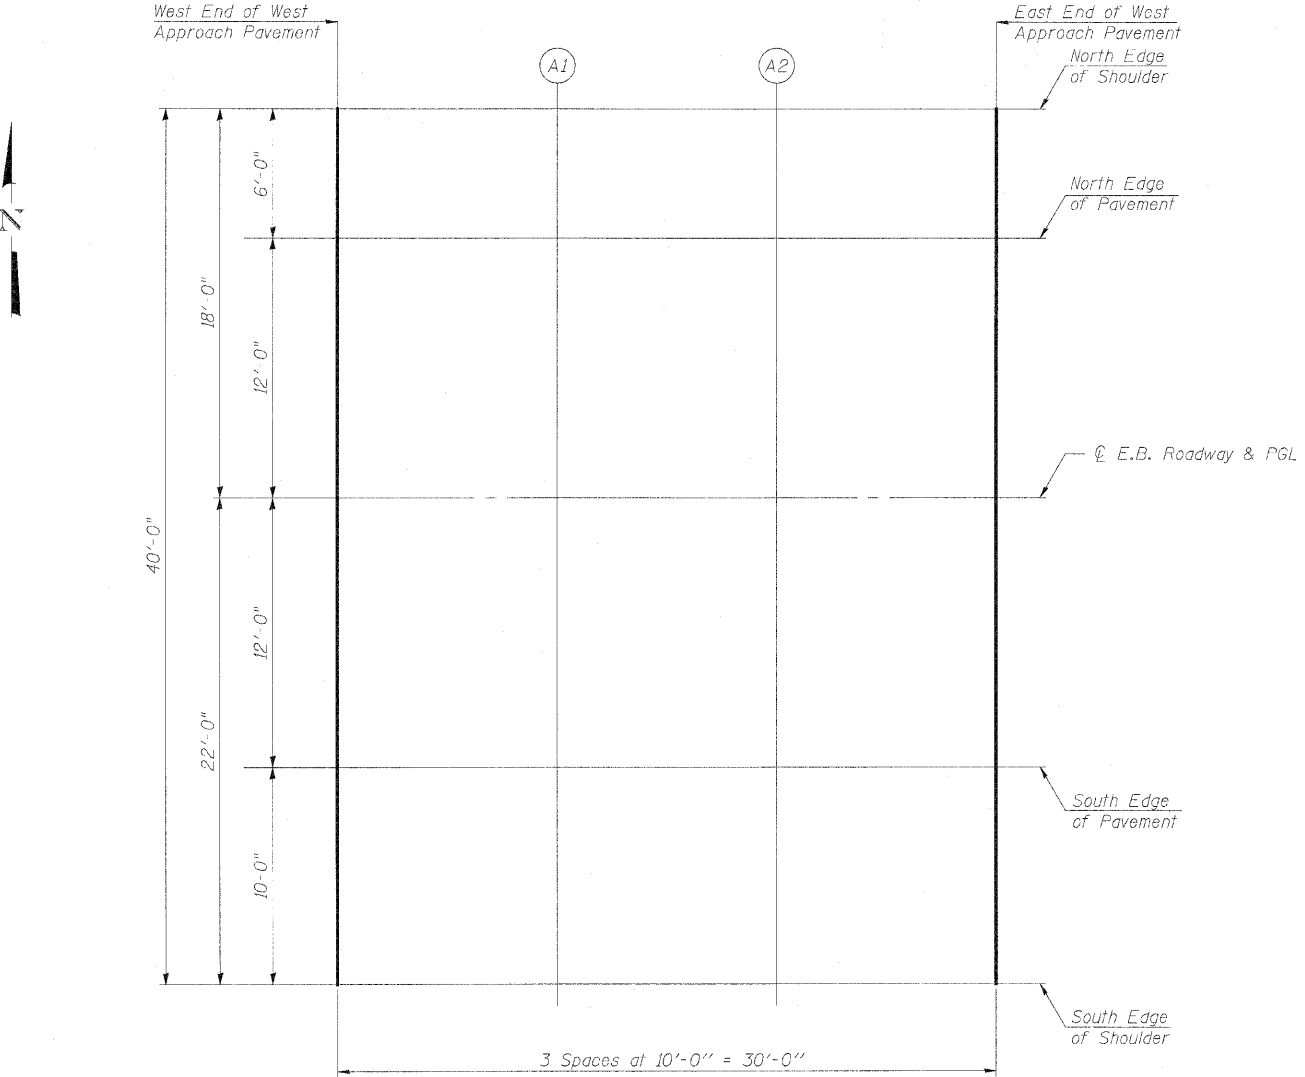

PLAN

DESIGNED	LC
CHECKED	MCT
DRAWN	ASJ
CHECKED	MCT



**INFRASTRUCTURE
ENGINEERING** | INCORPORATED
33 West Monroe | Suite 1540 | Chicago, IL 60603
P 312.425.9560 | F 312.425.9564 | www.infrastructure-eng.com

SHEET NO. 11	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
54 SHEETS	280	81-1(HB-2)R	ROCK ISLAND	503	293
CONTRACT NO. 64815					
FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT					