

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

NORTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.31	-18.00	587.27
A3	255+87.31	-18.00	587.41
A4	255+97.31	-18.00	587.54
E. End E. Appr. Pav't.	256+07.31	-18.00	587.67

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.31	-12.00	587.40
A3	255+87.31	-12.00	587.53
A4	255+97.31	-12.00	587.66
E. End E. Appr. Pav't.	256+07.31	-12.00	587.79

☉ E.B. ROADWAY & PGL

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.31	0.00	587.58
A3	255+87.31	0.00	587.72
A4	255+97.31	0.00	587.85
E. End E. Appr. Pav't.	256+07.31	0.00	587.98

SOUTH EDGE OF PAVEMENT


Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.31	12.00	587.40
A3	255+87.31	12.00	587.53
A4	255+97.31	12.00	587.66
E. End E. Appr. Pav't.	256+07.31	12.00	587.79

SOUTH EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
W. End E. Appr. Pav't.	255+77.31	22.00	587.19
A3	255+87.31	22.00	587.32
A4	255+97.31	22.00	587.46
E. End E. Appr. Pav't.	256+07.31	22.00	587.58

Note:
Offset is measured from ☉ E.B. Roadway & PGL.
Negative number indicates north of ☉. Positive number
indicates south of ☉.

TOP OF E.B. ROADWAY
EAST APPROACH SLAB ELEVATIONS
STRUCTURE NO. 081-0022 (E.B.)
STRUCTURE NO. 081-0023 (W.B.)

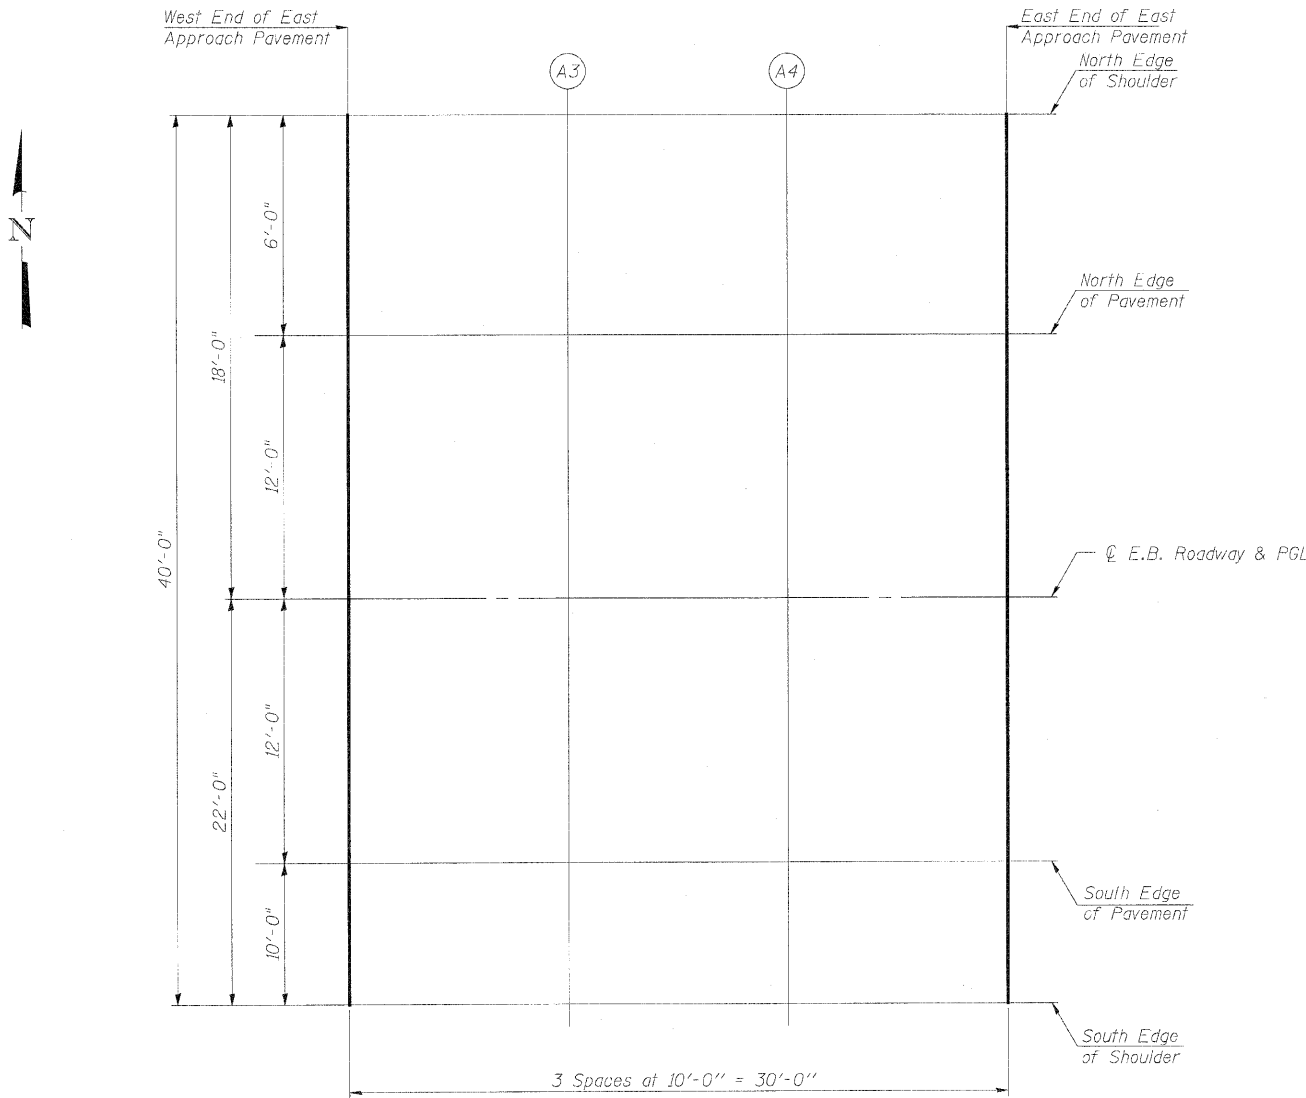

PLAN

DESIGNED	LC
CHECKED	MCT
DRAWN	ASJ
CHECKED	MCT



**INFRASTRUCTURE
ENGINEERING** | INCORPORATED
33 West Monroe | Suite 1540 | Chicago, IL 60603
P 312.425.9560 | F 312.425.9564 | www.infrastructure-eng.com

SHEET NO. 12	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
54 SHEETS	280	81-1(HB-2)R	ROCK ISLAND	503	294
CONTRACT NO. 64815					
FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT					