STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths						
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4		
3, 4	1'-5''	1'-11''	2'-1"	2'-4''		
5	1'-9''	2'-5"	2'-7"	2'-11''		
6	2'-1"	2'-11''	3'-1''	3′-6′′		
7	2'-9''	3'-10''	4'-2"	4'-8''		
8	3′-8′′	5'-1''	5′-5′′	6'-2"		
9	4'-7"	6′-5′′	6′-10′′	7′-9′′		

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C


Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Threaded splicer bar length = min. lap length + 1^{l_2} " + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

size	required	Table for minimum lap length
#7	16	3
#6	6	4
_	#7 #6	#7 16 #6 6

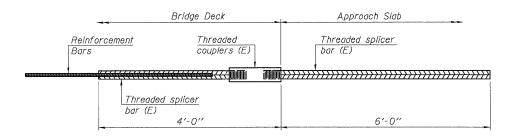

BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS


No. required =




INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

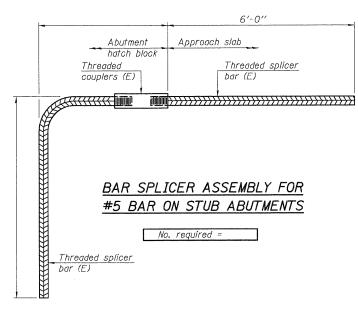



STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS STRUCTURE NO. 016-0665

TOTAL SHEET NO.

25

33

Coombe-Bloxdorf P.C. **SECTION** COUNTY SHEET NO. 9 -CIVIL ENGINEERS-1350 1292-1 COOK DESIGN BY DRAWN BY MCB -STRUCTURAL ENGINEERS-SHEETS CONTRACT NO. 60J57 -LAND SURVEYORS-Design Firm License No. 184-002703 FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT