


POROUS GRANULAR EMBANKMENT DETAIL

STORM SEWER, SPECIAL 18"

STATION 836 + 68.00

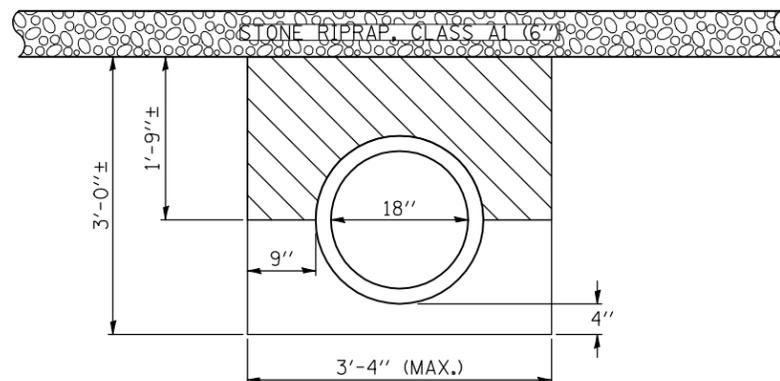

PAY LIMITS OF POROUS GRANULAR EMBANKMENT (CA-6) = 6.8 CU.YD.

POROUS GRANULAR BACKFILL SHALL EXTEND 2 FT. BEYOND THE AGGREGATE SHOULDER.

FILE NAME =	USER NAME = hennessdm	DESIGNED -	REVISED -
ct:\pw\work\p\dot\hennessdm\0184799\0570800-sh1-Details.dgn		DRAWN -	REVISED -
	PLOT SCALE = 40.0000' / IN.	CHECKED -	REVISED -
	PLOT DATE = 10/20/2010	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

POROUS GRANULAR EMBANKMENT DETAIL

SCALE: SHEET NO. 3 OF 3 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
741	(8,9,10)CR	Platt	65	38
CONTRACT NO. 70800				
ILLINOIS FED. AID PROJECT				