



LEGEND

( FOR THE STORM WATER POLLUTION PREVENTION PLAN SHEETS )

ITEM	SYMBOL
TEMPORARY DITCH CHECKS, AGGREGATE ( STD 280001 ) [ AGGREGATE ( EROSION CONTROL ), 3.0 TONS PER EACH ]	
INLET AND PIPE PROTECTION ( STD 280001 ) [ HAY BALES NOT ALLOWED ]	
PERIMETER EROSION BARRIER	
EARTH EXCAVATION FOR EROSION CONTROL ( SEDIMENT BASINS )	
PRESERVE EXISTING TREES, WOODLANDS, AND UNDERSTORY ( OUTSIDE CONSTRUCTION LIMITS )	
ITEM PLACED AT BEGINNING OF CONSTRUCTION ( Requirement )	* ITEM *
ITEM PLACED AS DIRECTED BY ENGINEER ( When required by situation )	ITEM
DIRECTION OF OVERLAND FLOW	
HEAVY DUTY EROSION CONTROL BLANKET	
ITEM PLACED DURING STAGE 1 CONSTRUCTION	①

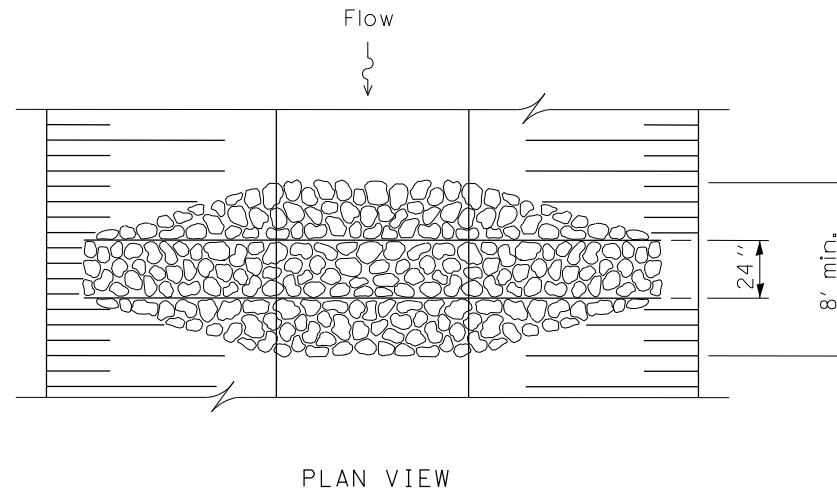


PLAN VIEW

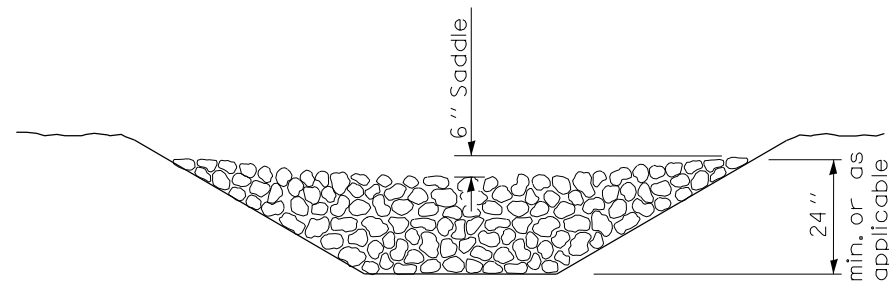

ELEVATION

TEMPORARY AGGREGATE DITCH CHECKS  
( TYPICAL )

SEE STANDARD 280001  
FOR EROSION CONTROL  
DETAILS NOT SHOWN.

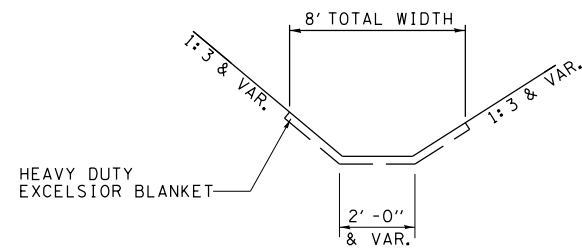

HEAVY DUTY EXCELSIOR BLANKET LIMITS  
( TYPICAL )

GENERAL NOTES:

All items shall be constructed as shown on this sheet,  
on Standard 280001, and as directed by the Engineer.

Mulch shall be method 2, unless otherwise noted.

Aggregate ditch checks shall be paid for as "AGGREGATE ( EROSION CONTROL )".

FILE NAME =	USER NAME = laughlinc1	DESIGNED -	REVISED -
et:\pw\work\p\dot\laughlinc1\024497\0672805-sh1-ECNotes-4.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0002' / in.	CHECKED -	REVISED -
	PLOT DATE = Nov-03-2010 11:35:06AM	DATE -	REVISED -

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

STORM WATER POLLUTION PREVENTION LEGEND

SCALE: none SHEET NO. 4 OF 4 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
685	(117,118)RS-4,119RS-1; 118B-1	HANCOCK	101	39
FED. ROAD DIST. NO.			ILLINOIS FED. AID PROJECT	

CONTRACT NO. 72B05