


NOTE:

ALL GUIDE SIGNS SHALL HAVE ZZ SHEETING.

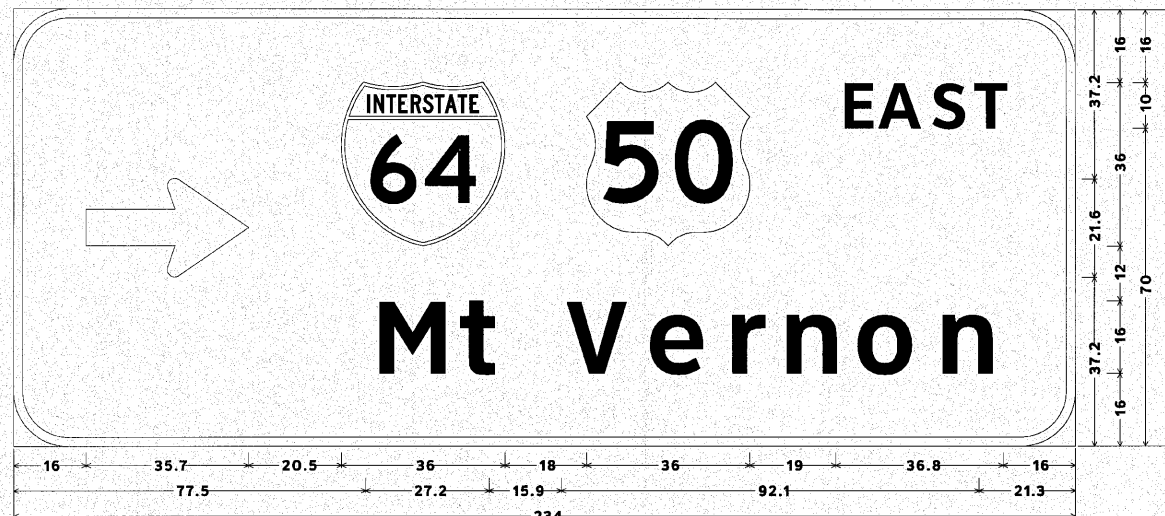


12.0" Radius, 2.0" Border, White on Green;
Standard Arrow Custom 35.8" X 21.6" 0; [EAST] ClearviewHwy-5-W; [Mt Vernon] ClearviewHwy-5-W;
Table of widths and spaces.

⇨	⇨	⇨	E	A	S	T	
16.0	35.7	20.5	36.0	18.0	36.0	19.0	36.8
M	t	V	e	r	n	o	n
77.5	14.7	4.7	7.8	15.9	13.6	3.9	11.7

SIGN PANEL SP1 & SP2

SIGNING SCHEDULE					
STA	LT / RT	SIGN PANEL NUMBER	HEIGHT (IN)	WIDTH (IN)	72000300 SIGN PANEL - TYPE 3 (SQ FT)
IL RTE 159					
25+00	RT	SP1	96	234	156.00
33+75	LT	SP2	96	234	156.00
41+50	LT	SP3	186	270	348.75
TOTALS					660.75
USE					661

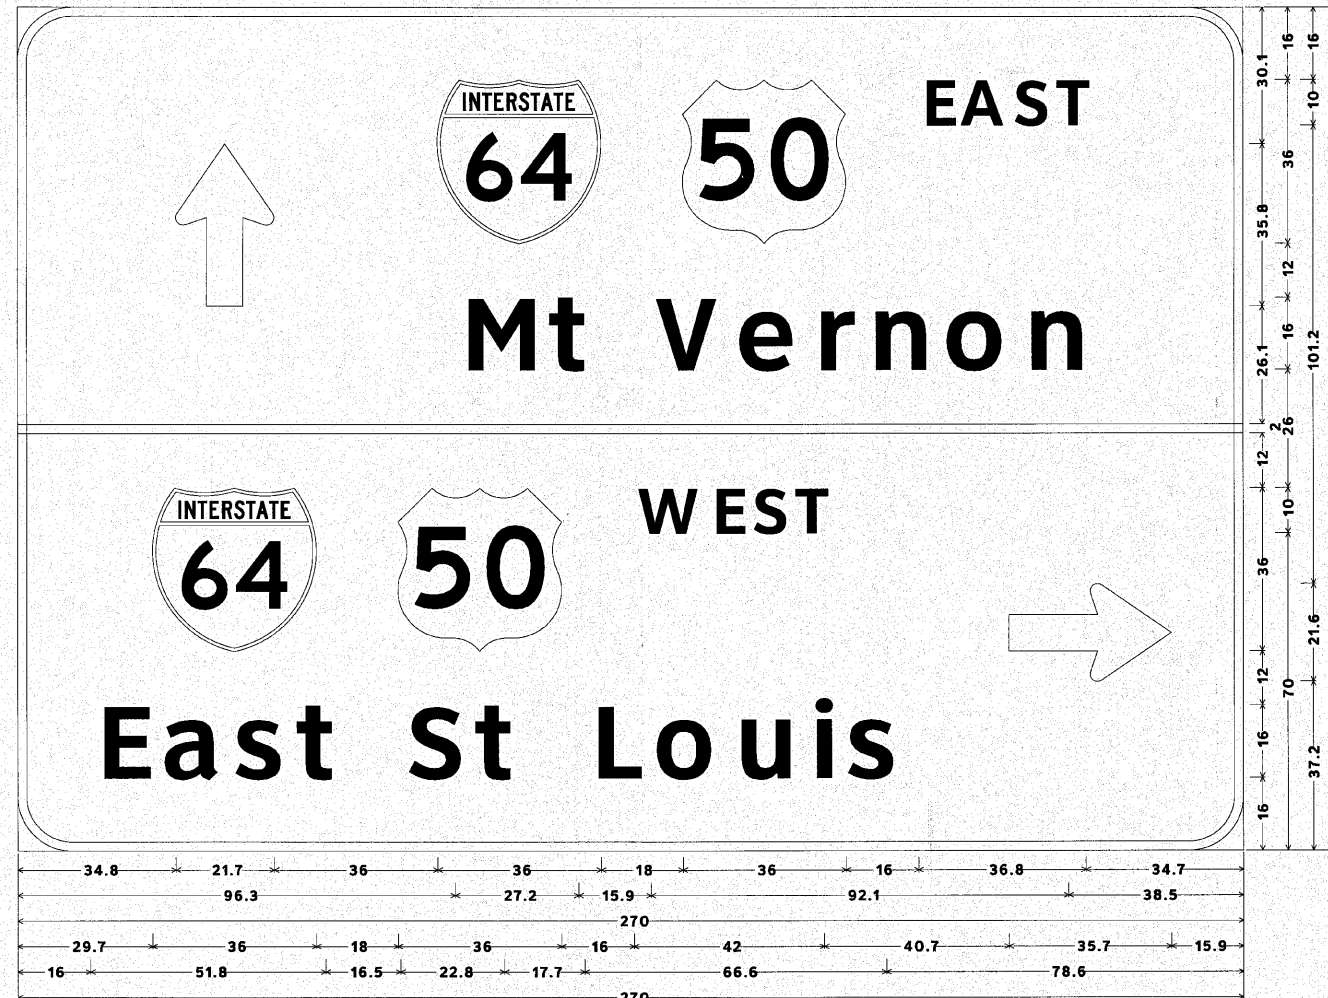

12.0" Radius, 2.0" Border, White on Green;
Standard Arrow Custom 35.8" X 21.6" 90; [EAST] ClearviewHwy-5-W; [Mt Vernon] ClearviewHwy-5-W; [WEST] ClearviewHwy-5-W; [East St Louis] ClearviewHwy-5-W;
Standard Arrow Custom 35.8" X 21.6" 0;
Table of widths and spaces.

⇩	⇩	⇩	E	A	S	T	
34.8	21.7	36.0	36.0	18.0	36.0	16.0	34.7
M	t	V	e	r	n	o	n
96.3	14.7	4.6	7.9	15.9	13.5	3.9	11.8
-0.0270.00.0							
⇨	⇨	⇨	W	E	S	T	
29.7	36.0	18.0	36.0	13.3	3.0	6.4	2.2
E	a	s	t	S	t	L	o
16.0	10.2	4.3	11.9	3.8	10.2	3.5	7.9

SIGN PANEL SP3

NOTE:

ALL GUIDE SIGNS SHALL HAVE ZZ SHEETING.

FILE NAME = G:\S09017-7\IL 159\CAD\Sign Panels.dgn	USER NAME = IE Consultants	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGN PANEL DETAILS				F.A.I. RTE. 64	SECTION 82-5K-2	COUNTY ST CLAIR	TOTAL SHEETS 162	SHEET NO. 70
PLOT SCALE = 0.5000' / IN.	CHECKED -	REVISED -	REVISED -						CONTRACT NO. 76D59				
PLOT DATE = 7/7/2010	DATE -	REVISED -	REVISED -		SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.	FED. ROAD DIST. NO.	[ILLINOIS] FED. AID PROJECT	