

ADT:
(2009) = 1100
(2029) = 1400
PC = 1323
SU = 64
MU = 13
DHV₂₀ = 140

SHEET NO. TITLE

1	COVER SHEET AND SUMMARY OF QUANTITIES
2	MISCELLANEOUS DETAILS
3	TYPICAL SECTIONS AND MISCELLANEOUS DETAILS
4-5	PLAN

701006-03
701201-04
701301-04
701306-03
701311-03
701901-01
780001-02
BLR 24-2

SUMMARY OF QUANTITIES			
CODE NO.	PAY ITEM	UNIT	TOTAL
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	20
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	137
40600982	HOT-MIX ASPHALT SURFACE REMOVAL	SQ YD	177.6
	-BUTT JOINT		
40603085	HOT-MIX ASPHALT BINDER COURSE.	TON	1,710
	IL 19.0, N70		
40603315	HOT-MIX ASPHALT SURFACE COURSE.	TON	1,430
	MIX "C", N70		
48100100	AGGREGATE SHOULDERS, TYPE "A"	TON	1,560
67100100	MOBILIZATION	L SUM	1
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	620
Δ78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	19,877
Δ SPECIALTY ITEM			

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS
PLANS FOR PROPOSED ROADWAY IMPROVEMENTS


FEDERAL-AID S.T.R. PROJECT
F.A.S. 1878 (CH 5)

Franklin County, Illinois

Section 08-00172-00-RS


Project RS-1878(109)

JOB C-99-528-09

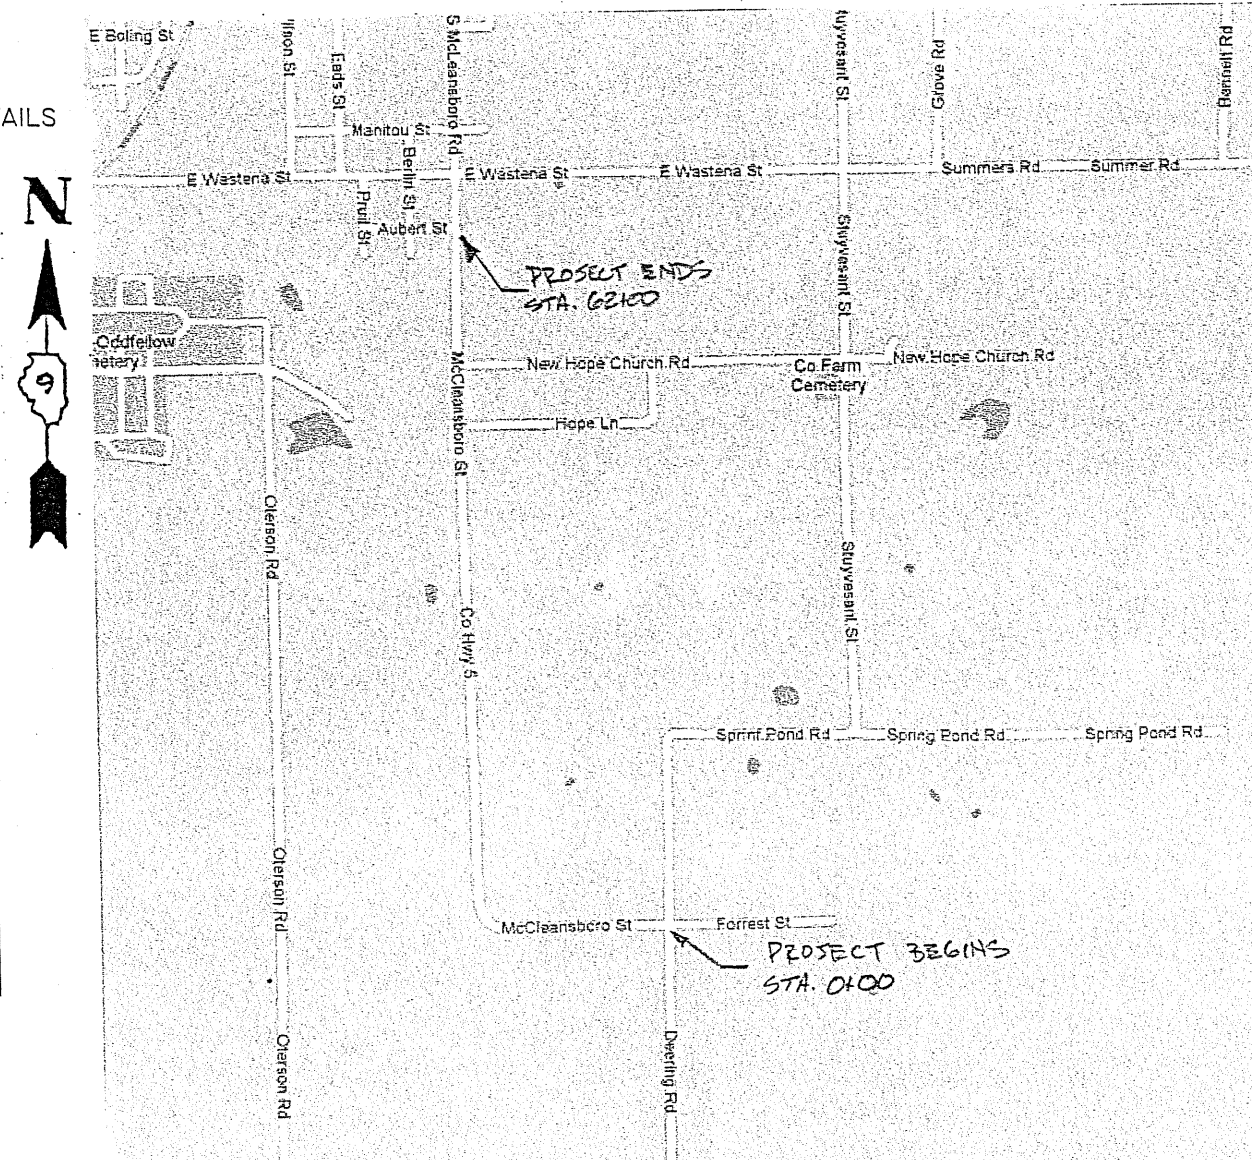

NET LENGTH OF IMPROVEMENT = 1.17⁴ MILES (6,200 FEET)

RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
FAS 1078	08-00172-00-25	FRANKLIN	5	1

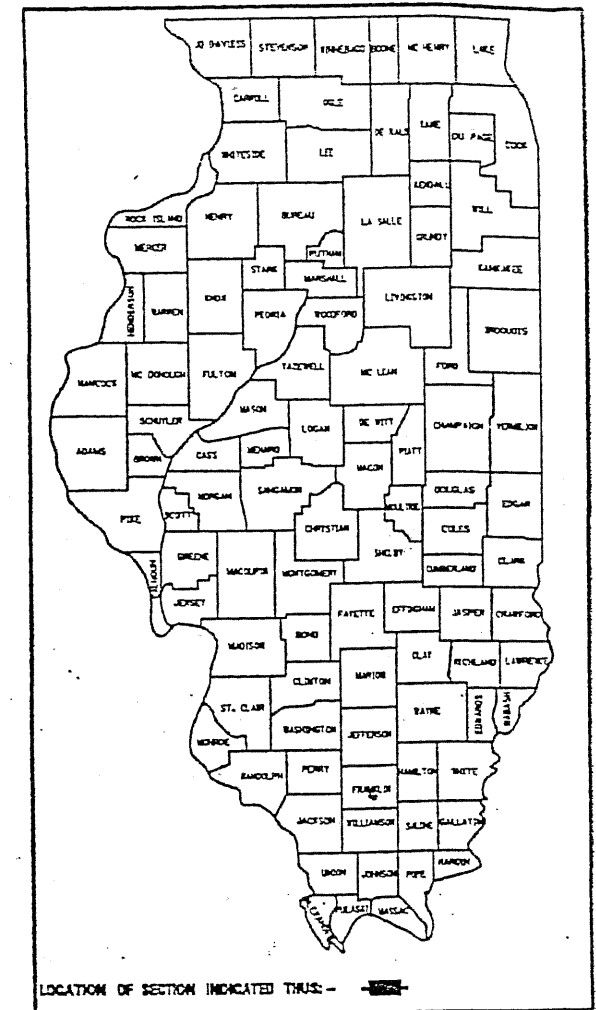


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

APPROVED 8-13-2010
Franklin County Engineer
FRANKLIN COUNTY HIGHWAY ENGINEER

PASSED 8/31/10
Dev W. Hall
DISTRICT 9 ENGINEER OF LOCAL ROADS & STREETS

RELEASING FOR BID
BASED ON LIMITED
REVIEW 8-31-2010
Mary C. Lewis
DEPUTY DIRECTOR OF HIGHWAYS, REGION 5 ENGINEER




MICHAEL A. ROLLA
ILLINOIS REGISTERED PROFESSIONAL ENGINEER
#062-056332
LIC. EXPIRES NOVEMBER 30, 2011