

TYPICAL APPLICATIONS OF URBAN PAVEMENT MARKINGS AND MARKERS

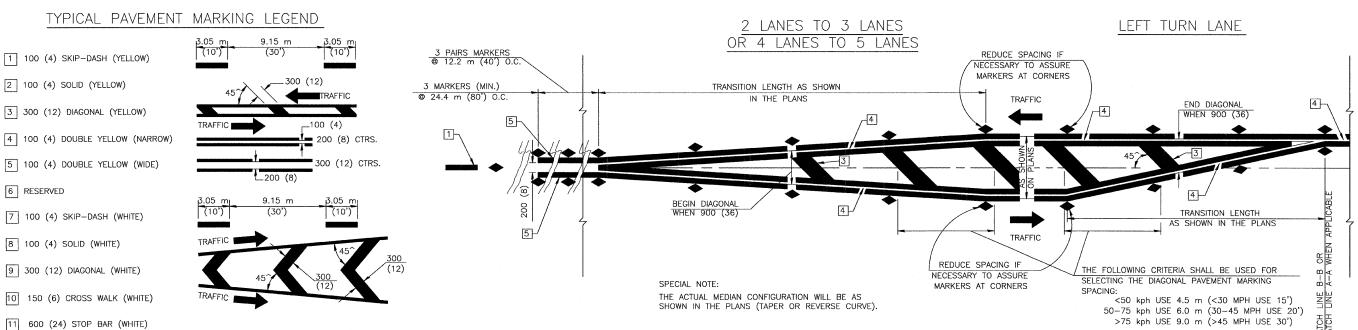


TYPICAL MEDIAN TRANSITIONS

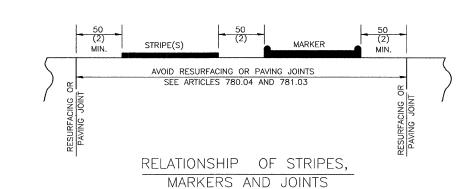

TYPICAL PAVEMENT MARKERS LEGEND

- TWO-WAY AMBER MARKER
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER

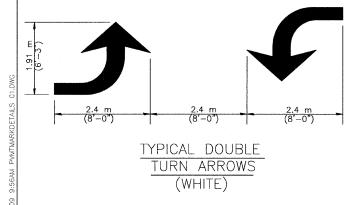


All dimensions are in millimeters (inches) unless otherwise shown.

12 200 (8) SOLID (WHITE)

14 RESERVED

13 100 (4) LANE LINE EXTENSIONS (WHITE)



GENERAL NOTES

- 1. WHEN PAVEMENT MARKINGS ARE TO BE PLACED ADJACENT TO MEDIANS, SPECIAL DETAILS WILL BE INCLUDED ELSEWHERE IN THE PLANS.
- 3. SOME OF THE INFORMATION INCLUDED WITH THIS DETAIL MAY NOT BE APPLICABLE TO THIS IMPROVEMENT.
- 4. PAVEMENT MARKINGS ARE TO BE EXTENDED THROUGH OMISSIONS WHEN APPLICABLE.
- 5. A STRIPING KEY IS AVAILABLE ELSEWHERE AND SHALL BE SHOWN WHERE THE QUANTITIES ARE LISTED.
- 6. FINAL PAVEMENT MARKINGS SHALL BE IN PLACE PRIOR TO PLACING ANY RAISED REFLECTIVE PAVEMENT MARKERS.

SHEET NO. 100 OF 145

BY: DATED:

CITY OF URBANA PUBLIC WORKS ENGINEERING DIVISION

IMPROVEMENTS RKING DETAILS ROAD

MARKING

WINDSOR