LANDSCAPE INSTALLATION GENERAL NOTES:

1. VERIFICATION OF DIMENSIONS AND GRADES, BOTH EXISTING AND PROPOSED, SHALL BE THE CONTRACTOR'S RESPONSIBILITY PRIOR TO COMMENCEMENT OF WORK. THE CONTRACTOR SHALL NOTIFY THE DISTRICT ROADSIDE MANAGEMENT SPECIALIST, 618-346-3198 OF ANY DISCREPANCIES.

2. ALL SURFACE DRAINAGE SHALL BE DIRECTED AWAY FROM BUILDINGS. SURFACE DRAINAGE SHALL BE DIRECTED TO EXISTING DRAINAGE STRUCTURES DESIGNATED FOR THE COLLECTION OF SURFACE RUN-OFF.

3. CONTRACTOR SHALL REPAIR IN KIND ANY AREAS DAMAGED AS A RESULT OF LANDSCAPE OPERATIONS AT NO ADDITIONAL COST TO THE CONTRACT.

4. ALL SODDING, SALT TOLERANT AREAS SHALL HAVE FERTILIZER APPLIED AT A 1:1:1 RATIO AS FOLLOWS:
   NITROGEN FERTILIZER NUTRIENT - 60 LBS/ACRE
   PHOSPHORUS FERTILIZER NUTRIENT - 60 LBS/ACRE
   POTASSIUM FERTILIZER NUTRIENT - 60 LBS/ACRE

5. ALL SEEDING, CLASS 2A & SEEDING, CLASS 3A AREAS SHALL HAVE FERTILIZER APPLIED AT A 1:1:1 RATIO AS FOLLOWS:
   NITROGEN FERTILIZER NUTRIENT - 90 LBS/ACRE
   PHOSPHORUS FERTILIZER NUTRIENT - 90 LBS/ACRE
   POTASSIUM FERTILIZER NUTRIENT - 90 LBS/ACRE

6. ALL SEEDING, CLASS 4A AREAS SHALL NOT REQUIRE FERTILIZER NUTRIENTS.

7. EROSION CONTROL BLANKET SHALL BE APPLIED TO ALL SEEDED AREAS.

8. SUPPLEMENTAL WATERING SHALL BE APPLIED AT THE DIRECTION OF THE ENGINEER AT A RATE OF 3 GAL/SQ YD, OR AT THE RATE DIRECTED BY THE ENGINEER.

9. THE CONTRACTOR SHALL COORDINATE THE LANDSCAPING PLANTING SCHEDULE WITH CONTRACT 76C54 TO ENSURE THAT THE PROPOSED LIGHTING AND CONDUITS ARE FINALIZED IN THE AREAS OF THE PROPOSED LANDSCAPING, AND THAT THE LANDSCAPING IMPROVEMENTS CAN BE CONSTRUCTED WITHOUT CONFLICT.

10. CONTRACTOR SHALL CONTACT DAVID WALKER - IDOT ELECTRICAL SERVICES SUPERVISOR AT 618.346.3274 PRIOR TO CONSTRUCTION TO SCHEDULE A WALK THROUGH OF THE SITE TO IDENTIFY ALL DEEP WELLS AND I.T.S. EQUIPMENT.

11. TREES SHALL BE PLANTED AT A MINIMUM 20' C-C SPACING TO ALLOW FOR FUTURE MOWING BETWEEN TREES.

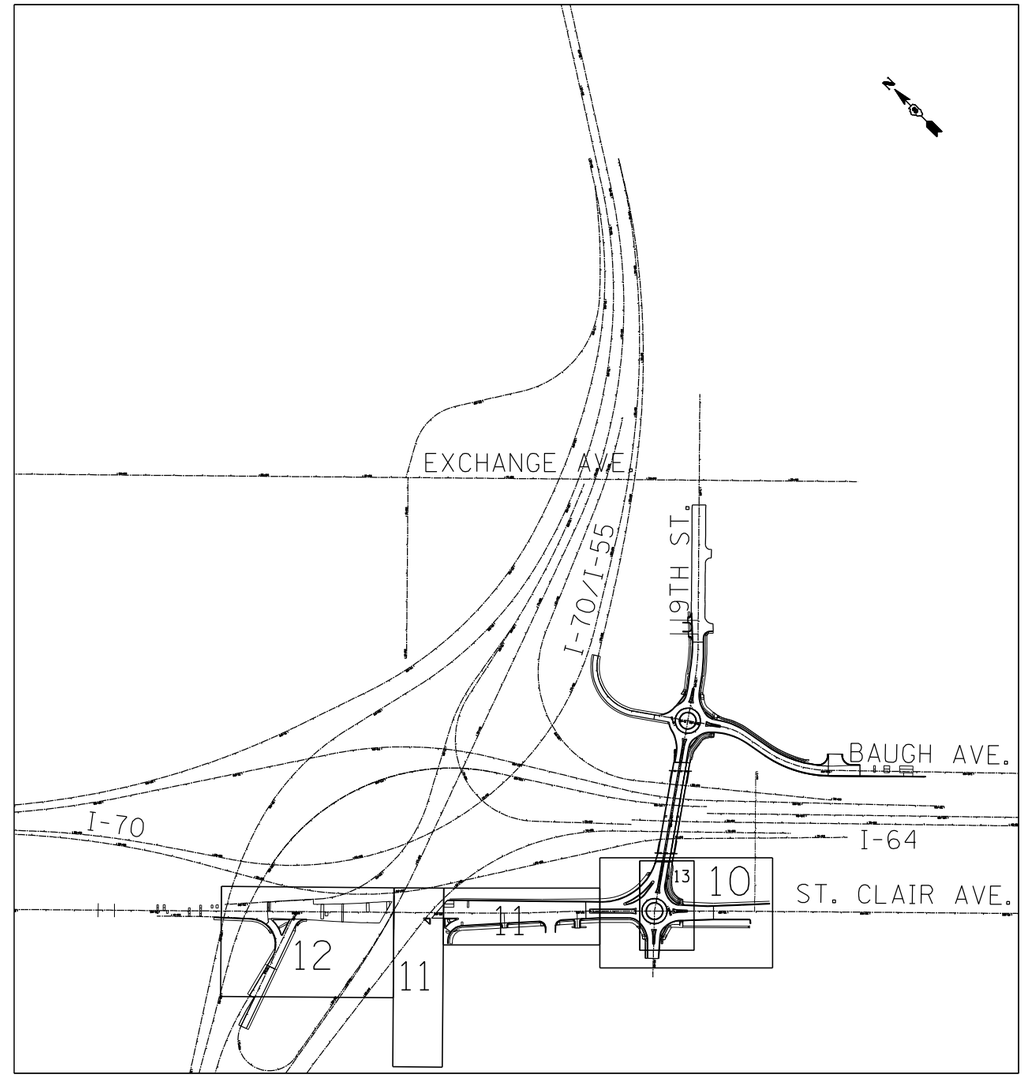

SHEET LAYOUT

..\D8TRI-36-LAYOUT.DGN,..\D8TRI-76C51-DESIGN.DGN,..\D8TRI-36-BORDER.DGN,..\D8TRI-76C55-DESIGN.DGN,..\D8CONN-99-MOTIF.DGN,..\D82-0326_76C51_9TH ST-PLAN.DGN
8-07-2012, 15:28:56 BONDNJ0 \\FS-0044\HAVULJD\TRANS.07\22022-20869-001\CIVIL\CAD\99 ALL CONTRACTS\TRI\SHEETS CONTRACT 76F36\D8TRI-36-SHT-LANDSCAPI.DGN

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - JM	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PROPOSED LANDSCAPING PLANS – GENERAL NOTES	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS / SHEET NO.
		DRAWN - JB	REVISED -			9166	82-1-12LS-2	ST. CLAIR	29 / 9
TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT SCALE = $SCALE$	CHECKED - ACL	REVISED -					CONTRACT NO. 76F36	
	PLOT DATE = $DATE$	DATE - 08/03/12	REVISED -		SCALE: N/A / SHEET NO. 1 OF 7 SHEETS / STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT	