
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

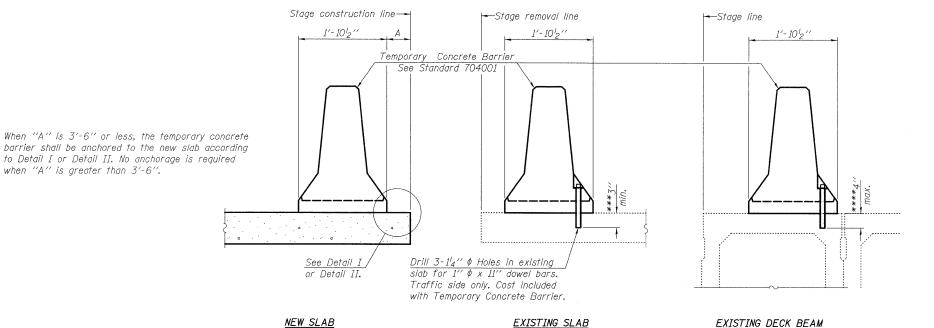


## NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate € of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x10" steel P to the concrete slab or concrete wearing surface with 2-58''\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate © of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

## SECTIONS THRU SLAB OR DECK BEAM

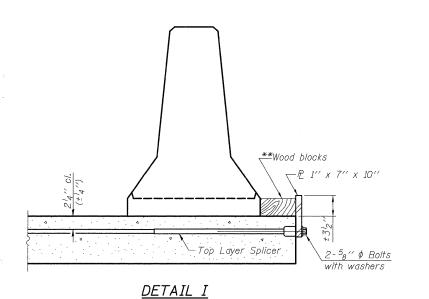

\*\*\*\*If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete. \*\*Wood blocks Extended #5 bars -#5 bars 2-5<sub>8</sub> " ∮ Expansion Anchors or cast in place inserts with a certified min. proof load of DETAIL II 5,000 Lbs.



## STEEL RETAINER P 1" x 7" x 10"

\*Required only with Detail II

TEMPORARY CONCRETE BARRIER IL 34/146 OVER THREE MILE CREEK STATION 76+80.00



\*\*\*Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment

shall be in addition to wearing surface depth.

).	SHEET	NO. 1
	18 SHI	FETS

>	F.A.P. RTE.	SECTION				COUNTY	TOTAL SHEETS		SHEET NO.	
-	885	5B-1				Hardin	48		25	
		S.N. 035-0015			(	CONTRACT	NO.	98	3949	
	FED. RO	DAD DIST. NO	ILLINOIS	FED.	AID	PROJECT				

when "A" is greater than 3'-6".

<sup>\*\*</sup>Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.