SIGN DETAIL

1:75

WB-CL-93
STA. 712+50

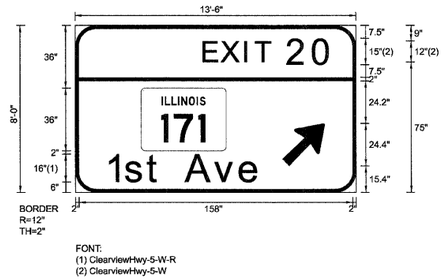

FONT:
(1) ClearviewHwy-5-W-R
(2) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	13'-6" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	48.2	46	49.1	36
ARMED	45	129.8	27.3	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

E	X	I	T	2	0		LENGTH	SERIES/SIZE
86.5	95.1	106.5	111.4	128.6	143.8		69.5	ClearviewHwy-5-W 10,15
1	s	t		A	v	e	89	ClearviewHwy-5-W-R 16/13
28.3	39.3	52.1	59.9	74.2	90.8	105.5		

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 23 OF 34 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3131, ETC., 3435) RS-6	COOK	215	155
		CONTRACT NO. 60K10		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		