SIGN DETAIL

1:75

WB-TR-95
STA. 734+30

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 11'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

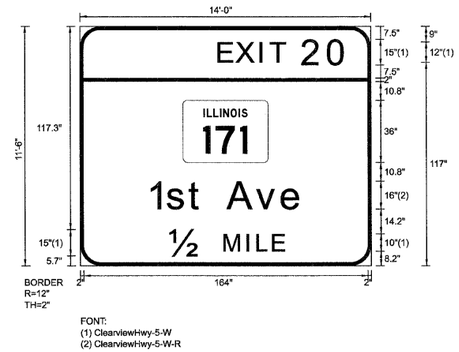

SYMBOL	ROT	X	Y	WID	HT
M1-I100A-2-22-10D	0	39	61	49.1	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
E	X	I	T	2	0																																		ClearviewHwy-5-W
44.5	53.1	64.5	69.4	86.6	101.8																																	69.5	10,15
1	s	t		A	v	e																																	ClearviewHwy-5-W-R
24.4	35.4	48.2	56	70.4	86.9	101.6																																89	16/13
12	M	I	L	E																																			ClearviewHwy-5-W
36	67.3	80.5	86.4	95.4																																		65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 24 OF 34 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3131, ETC., 3435) RS-6	COOK	215	156
		CONTRACT NO. 60K10		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		