SIGN DETAIL

1:75

WB-BM-130
STA. 1118+70

SIGN NUMBER	name	
WIDTH x HGHT.	15'-6" x 8'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

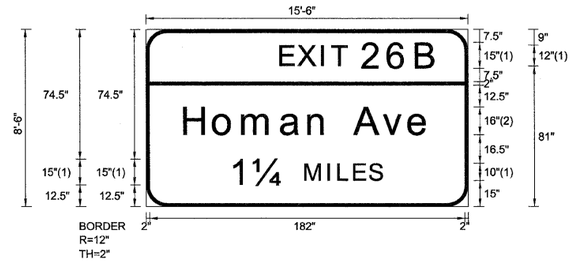

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
E	X	I	T	2	6	B																																	ClearviewHwy-5-W
78	88.3	101.9	107.9	125.5	140.6	156.6																																90	12,15
H	o	m	a	n		A	v	e																															ClearviewHwy-5-W-R
22.3	39.2	56	78.2	94.1	105.2	120.6	137.2	151.9																														141.3	16/13
1		¼	M	I	L	E	S																																ClearviewHwy-5-W
49.5	56.2	62.2	92.2	105.4	111.3	120.3	129.3																															87	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - SEW	REVISED -	
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -	

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 26 OF 46 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2525, ETC., 2727) RS-8	COOK	201	133
		CONTRACT NO. 60K11		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		