SIGN DETAIL
1:75

WB-BM-138
STA. 1159+20

SIGN NUMBER	name	
WIDTH x HGHT.	15'-0" x 8'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

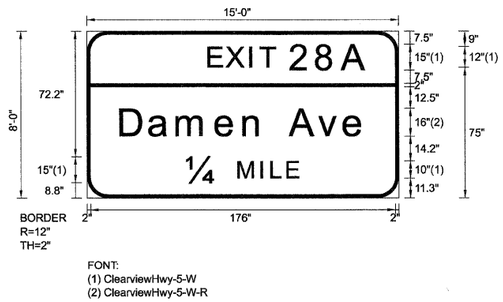

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES/SIZE
E	X	I	T	2	8	A				ClearviewHwy-5-W
70.7	81	94.6	100.6	118.2	133.3	148			91.3	12,15
D	a	m	e	n		A	v	e		ClearviewHwy-5-W-R
19.6	36.1	52.1	74.6	90.8	101.9	117.4	133.9	148.6	140.7	16/13
¼	M	I	L	E						ClearviewHwy-5-W
57.8	87.8	100.9	106.8	115.9					64.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 1/25/10	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 33 OF 46 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2525, ETC., 2727) RS-8	COOK	201	140
		CONTRACT NO. 60K11		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		