

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


F.A. -- RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR.	D2 REFLECTOR REPL 26-10	VARIOUS	3	1
		ILLINOIS	CONTRACT NO. 46673	

PROPOSED
HIGHWAY PLANS

INDEX OF SHEETS:


COVER SHEET, SHEET No. 1
GENERAL NOTES, SHEET No. 2
STATE STANDARDS, SHEET No. 2
SUMMARY OF QUANTITIES, SHEET No. 3

VARIOUS ROUTES
SECTION D2 REFLECTOR REPL 26-10
VARIOUS COUNTIES

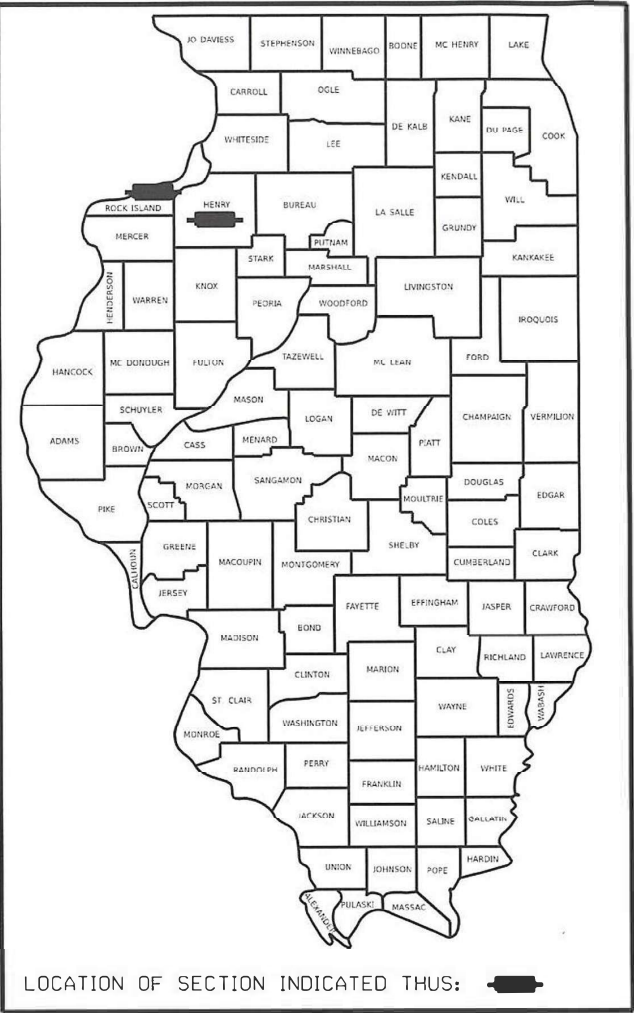


LOCATION OF SECTION INDICATED THUS:

M-60-010-26

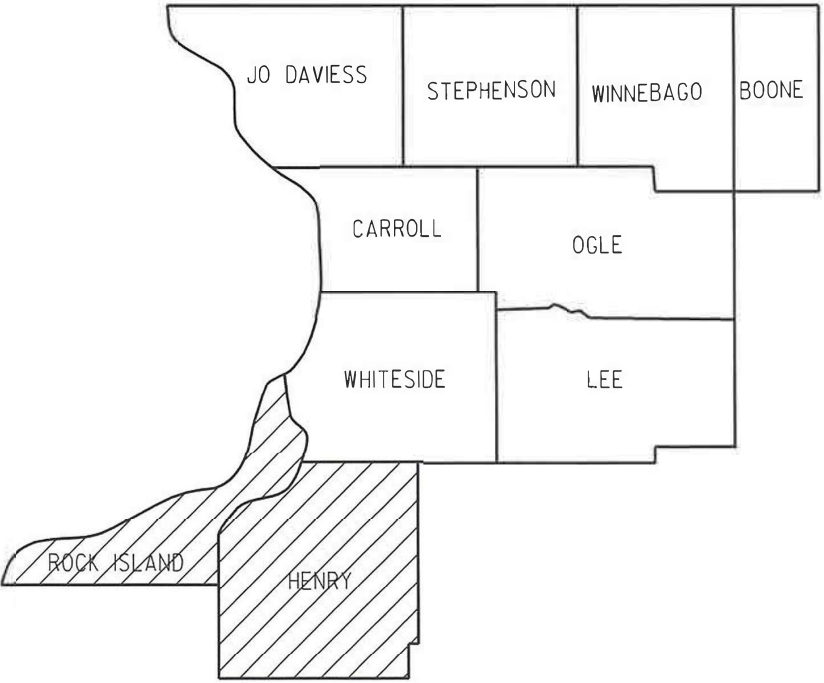

LOCATION OF SECTION INDICATED THUS: -

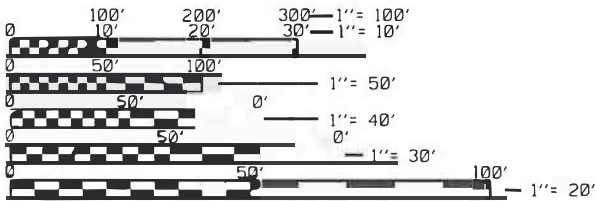

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: TROY EBENEZER (815) 284-5491
PROJECT MANAGER: KRISTIE NYDEREK (815) 284-5469

CONTRACT NO. 46673

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED: Nov 20 2025
Joshua Jones
REGIONAL ENGINEER
January 23 2026
Scott A. Etkin
ENGINEER OF DESIGN AND ENVIRONMENT
January 23 2026
Gregory S. 5
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES

THE DEPARTMENT MAY REMOVE AND NOT INSTALL MARKERS IN CERTAIN LOCATIONS AT THE ENGINEER'S DISCRETION.

THE DEPARTMENT MAY INSTALL MARKERS IN CERTAIN LOCATIONS THAT DID NOT PREVIOUSLY HAVE MARKERS AT THE ENGINEER'S DISCRETION.

THE LOCATIONS OF THE REPAIR AREAS SHALL BE DETERMINED BY THE ENGINEER.

THE WORK SITE SHALL BE LEFT IN A SAFE AND ORDERLY CONDITION, FILLING ANY HOLES CREATED BY THE END OF THE WORK DAY.

NO MATERIAL SHOULD BE LEFT ON OR NEAR THE ROADWAY.
REMOVAL OF DAMAGED MATERIALS WILL INCLUDE LOADING, HAULING, AND DISPOSAL.

ANY NECESSARY TRAFFIC CONTROL WILL BE PROVIDED BY THE CONTRACTOR; APPROPRIATE STANDARDS ARE LISTED ON SHEET NO. 2. TRAFFIC CONTROL SHALL NOT BE PAID FOR AS SEPARATE PAY ITEMS, BUT SHALL BE CONSIDERED A PART OF THE CONTRACT.

THE QUANTITIES SPECIFIC IN THIS CONTRACT ARE ONLY AN ESTIMATE TO ALLOW CONTRACTORS TO ESTABLISH UNIT PRICES AND PERMIT THE DEPARTMENT TO DETERMINE THE LOW BIDDER. IT SHALL BE UNDERSTOOD THAT THE UNIT PRICES OF THIS CONTRACT SHALL PREVAIL THROUGHOUT THE CONTRACT REGARDLESS OF THE QUANTITY.

STATE STANDARDS

701006-05	OFF-RD OPERATIONS, 2L2W, 15' to 24" FROM PAVEMENT EDGE
701101-05	OFF-RD OPERATIONS, MULTI-LANE, 15' to 24" FROM PAVEMENT EDGE
701301-04	LANE CLOSURE, 2L2W, SHORT TIME OPERATIONS
701306-04	LANE CLOSURE, 2L2W, SLOW MOVING OPERATION, DAY ONLY, FOR SPEEDS \geq 45 MPH
701311-03	LANE CLOSURE, 2L2W, MOVING OPERATION, DAY ONLY
701411-09	LANE CLOSURE, MULTI-LANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS \geq 45 MPH
701426-09	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS \geq 45 MPH
701427-05	LANE CLOSURE, MULTI-LANE, INTERMITTANT/MOVING OPER, FOR SPEEDS < 40 MPH
701501-06	URBAN LANE CLOSURE, 2L2W, UNDIVIDED
701502-09	URBAN LANE CLOSURE, 2L2W, BIDIRECTIONAL LEFT TURN LANE
701901-11	TRAFFIC CONTROL DEVICES
781001-04	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

SUMMARY OF QUANTITIES

PAYCODE	ITEM DESCRIPTION	UNIT	0021 TOTAL QUANTITY	100% STATE RURAL
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	25,000	25,000
78100300	REPLACEMENT REFLECTOR	EACH	30,000	30,000
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	25,000	25,000

MODEL: SH0001100000
FILE NAME: SH0001100000

	USER NAME = SUSER\$	DESIGNED - _____	REVISED - _____	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES	SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____	F.A. RTE. _____	SECTION _____	COUNTY _____	TOTAL SHEETS _____	SHEET NO. _____
	PLOT SCALE = SS CALES	DRAWN - _____	REVISED - _____				VAR. D2 REFLECTOR REPL 26-10	VARIOUS	3	3	
	PLOT DATE = SDATE\$	CHECKED - _____	REVISED - _____				CONTRACT NO. 46673				
	DATE - _____	REVISED - _____	ILLINOIS FED. AID PROJECT								