
SHEET __4_OF__4__

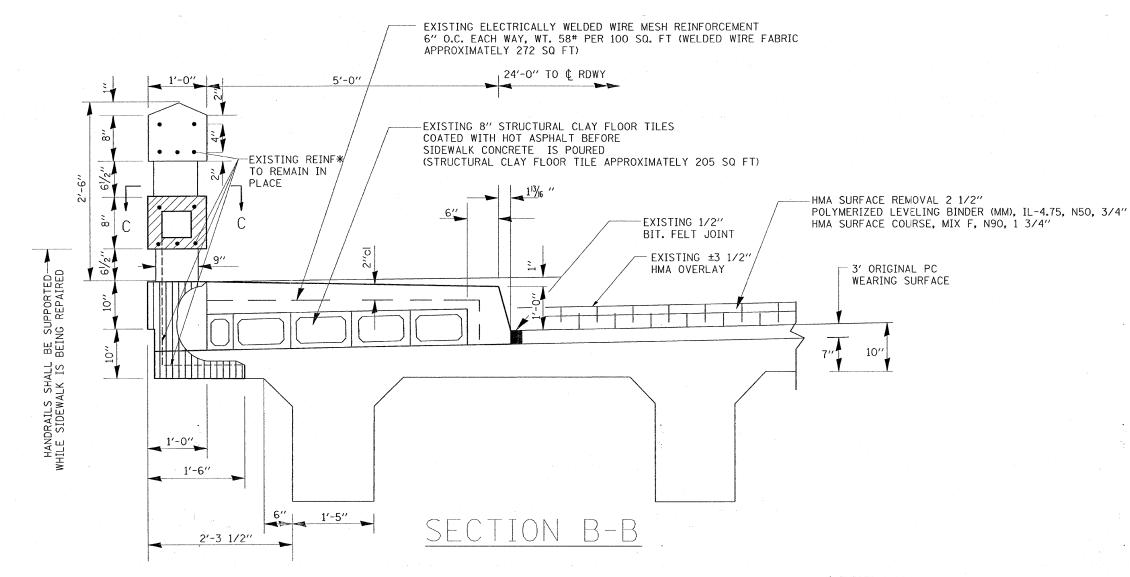

* EXISTING REINFORCEMENT BARS EXTENDING INTO THE REMOVAL AREA SHALL BE CLEANED, STRAIGHTENED AND INCORPORATED INTO THE NEW CONSTRUCTION. ANY REINFORCEMENT BARS THAT ARE DAMAGED DURING CONCRETE REMOVAL SHALL BE REPLACED WITH AN APPROVED BAR SPLICER OR ANCHORAGE SYSTEM. COST INCLUDED WITH CONCRETE REMOVAL.

HATCHED AREAS INDICATE "STRUCTURAL REPAIR TO CONCRETE DEPTH EQUAL TO OR LESS THAN 5 INCHES"

INDICATE "STRUCTURAL REPAIR TO CONCRETE DEPTH GREATER THAN 5 INCHES"

REVISIONS
NAME
DATE

REPAIR DETAILS
SN 016-0535

SCALE: VERT. DRAWN BY HORIZ. DATE

DATE

REPAIR DETAILS
SN 016-0535

DATE = 277/2000 NAME = 0:7/2000 SCALE = 58,0000 / 1N, NAME = 0ullaumefo