

b) ALL OTHER HEXAGONAL BOLTS & NUTS SHALL BE COMPOSED

NOT TO SCALE

PRESSURE

CONNECTION

DETAIL


REVISED:02-2


4. USE ECCENTRIC CONE ONLY.
5. VALVE VAULT MUST CONFORM TO ASTM C-478.
6. ALL SECTIONS TO BE TONGUE AND GROOVED.
7. NON-PRECAST OPENINGS SHALL BE CORED AND RUBBER

* SEE PIPE CONNECTIONS TO STRUCTURE DETAIL U-5.

OF STAINLESS STEEL.

BOOTED.*

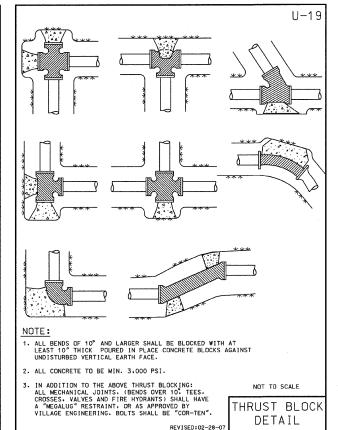

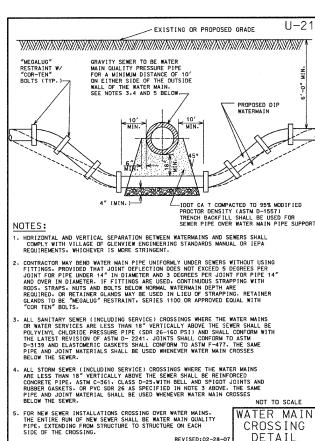

REVISED: 02-28-0

