


**SECTION THRU
EXISTING ABUTMENT**

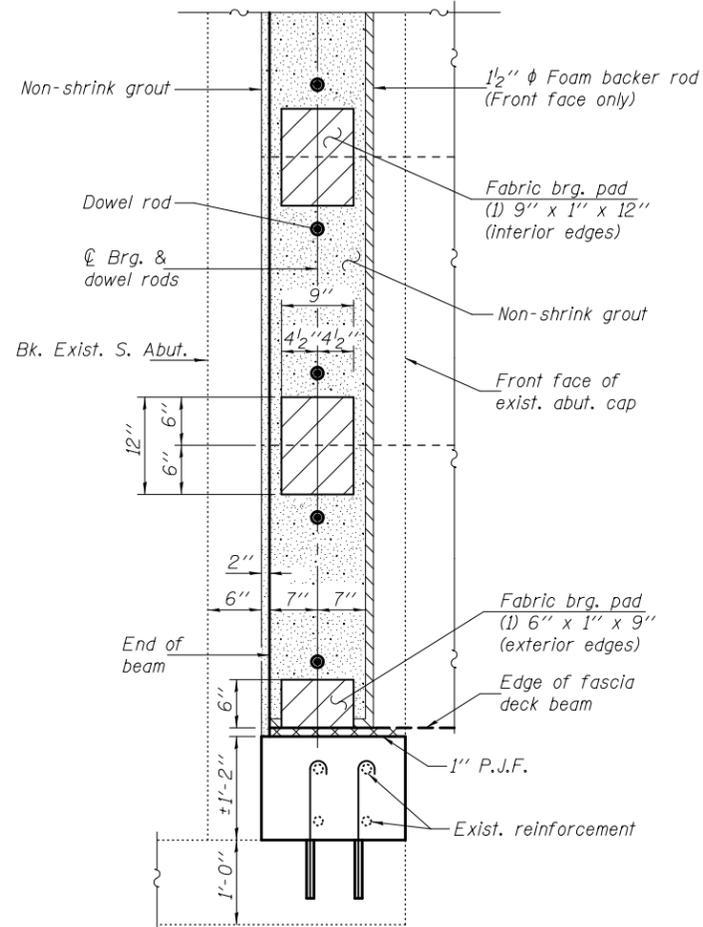

PLAN

(S. Abut. shown; N. Abut. similar)

Notes: Burn existing dowel rods flush with existing abutment surfaces. Cost included with Removal of Existing Superstructures.
The bearing seat surfaces shall be adjusted by shimming the bearing to assure firm and even bearing prior to placing grout. 2-1/8 inch fabric adjusting shims of the dimensions of the exterior bearing pad shown shall be provided for each beam.
All non-shrink grout is included in the cost of PPC Deck Beams 27".

DESIGNED - Josue Ortiz-Varela	EXAMINED - <i>Joanne F. [Signature]</i>	DATE - MARCH 24, 2014
CHECKED - Meseret Sila	PASSED - <i>Carl [Signature]</i>	REVISED -
DRAWN - h.t. duong	ACTING ENGINEER OF BRIDGES AND STRUCTURES	REVISED -
CHECKED - JQV/MS/GRA		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**SUPERSTRUCTURE DETAILS
STRUCTURE NO. 020-0046**

SHEET NO. 5 OF 10 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	54B-3, 54B-2	DEWITT	89	49
CONTRACT NO. 70606				
ILLINOIS FED. AID PROJECT				