DETAIL FOR RADAR SPEED SIGN

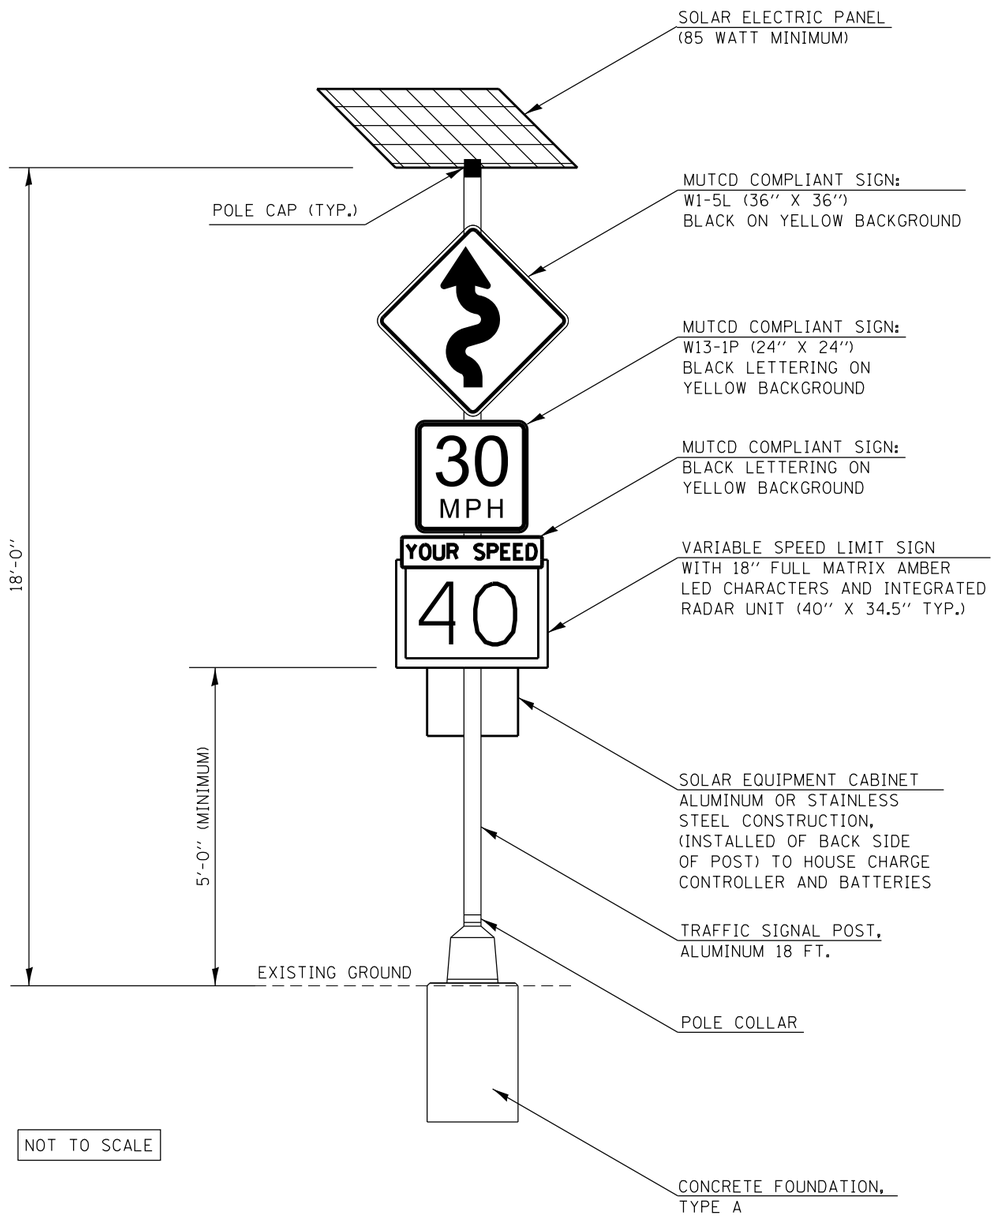

GENERAL NOTES

1. THE RADAR SPEED SIGN SHALL BE CONSTRUCTED AT THE BEGINNING OF THE FOLLOWING RAMPS: RAMP I-CA, I-BC, I-DB, I-AD. THE LOCATION WILL BE DETERMINED BY THE TRAFFIC OPERATIONS ENGINEER. CONTACT GARY SIMS AT 217-251-4859 ON WEEK PRIOR TO INSTALLATION FOR STATIONS AND OFFSETS.

2. THE TRAFFIC SIGNAL POST SPECIFIED SHALL BE INSTALLED ON A CONCRETE FOUNDATION, TYPE A. (SEE HIGHWAY STANDARD 878001)

3. TYPE ZZ SHEETING SHALL BE USED ON ALL SIGN PANELS.

4. MOUNTING HARDWARE ON ALL SIGNS SHALL ALLOW FOR VERTICAL ADJUSTMENTS IN THE FIELD.

5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR RESTORING ALL AREAS DISTURBED BY CONSTRUCTION OPERATIONS. THE COST OF THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE CONSIDERED INCIDENTAL TO THE RADAR SPEED SIGN.