


## ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE)


# SERVICE INSTALLATION POLE MOUNT (SHOWN)

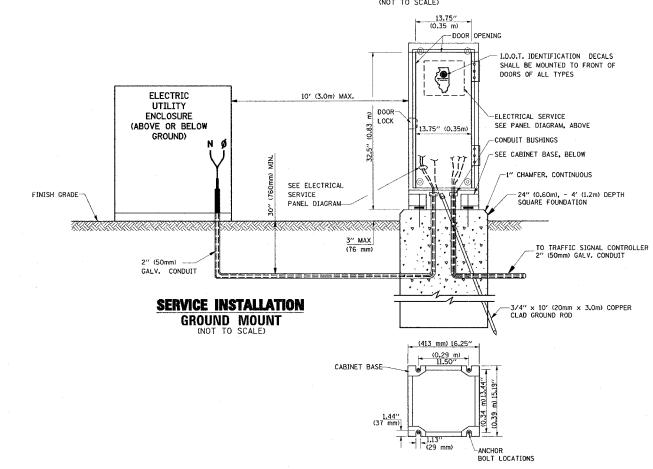

**CABINET - BASE BOLT PATTERN** 

ANTI-CORROSION COMPOUND
SHALL BE APPLIED ON ALL
BOLT/ CONNECTION ASSEMBLIES. -STAINLESS STEEL NUT AND 2 STAINLESS STEEL WASHERS

HANDHOLE COVER CAST CORNER FRAME WEB-UL LISTED GROUND COMPRESSION CONNECTOR DETAIL "A"



SEE DETAIL "A" SEE DETAIL "B" RECESSED COVER CABLE HOOKS REQUIRED, ALL HANDHOLES DOUBLE HANDHOLE POST AS REQ'D. (GREEN) -U.L. LISTED

### HANDHOLE COVER & FRAME - GROUNDING DETAIL

DIRECT BURIAL

(NOT TO SCALE)

(2) 1/2" x 1 1/4" STAINLESS STEEL BOLT WITH SPLIT LOCK WASHER AND NYLON INSERT LOCKOUT WELDED TO FRAME AND TO COVER. (TYPICAL) HEAVY DUTY COPPER COMPRESSION GROUNDING TERMINAL, (TYPICAL) EXISTING HANDHOLF GROUNDING CARLE

## **EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL**

(NOT TO SCALE)


NOTES:


#### SECTION COUNTY 2742 2005-061RS COOK 28 26 STA. TO STA. FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT


CONTRACT NO. 60A53

#### GROUNDING SYSTEM

- 1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR TYPE XLP, NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN RACEWAYS. THE GROUNDING CABLE SHALL BE INSTALLED IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED. ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE (HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.). GROUND ROD SHALL BE 3/4" DIA.  $\times$  10'-0" (20mm  $\times$  3.0m) LONG, COPPER CLAD. ONE GROUND ROD SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS, CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS, THE RESIDENT ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC. ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT
- 2. THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.
- 3. ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS
- 4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.








3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL)

### NOTES:

· ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED. GROUND CABLE SHALL BE LOOPED OVER HOOKS IN THE HANDHOLES 6.5' (2.0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13' (4.0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES. 5' (1.4m) OF SLACK SHALL BE PROVIDED BETWEEN FRAME AND COVER.

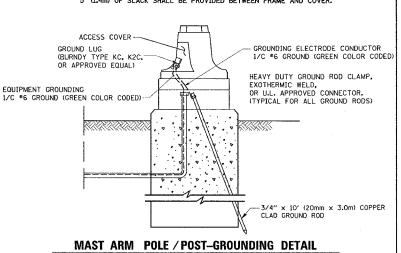

(NOT TO SCALE)			
REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
NAME	DATE	ILLINOIS DELANTMENT OF TRANSPORTATION	
CADD	5/30/00		
CADD	3/15/01	DISTRICT ONE	
BUREAU OF TRAFFIC	1/01/02		
		STANDARD TR	AFFIC SIGNAL
		DESIGN DETAILS	
			DRAWN DV DWD
		SCALE: NONE	DRAWN BY: RWP DESIGNED BY: DAD CHECKED BY: DAZ
		DATE: 12/22/2006	CHECKED BY: DAZ SHEET 3 OF 4
L	L	DATE: 12/22/2006	
			TS05

REVISION DATE: 01/01/02

DATE NAME SCALE NAME