

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

Agute No.	SECTION	co	ANTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 3
I-39		WINN	EBAG0	40	30	7 SHEETS
PED. ROAD DIST	NO. 7	ILLINOIS	FED. AED PR	DJECT-		

Contract #64857

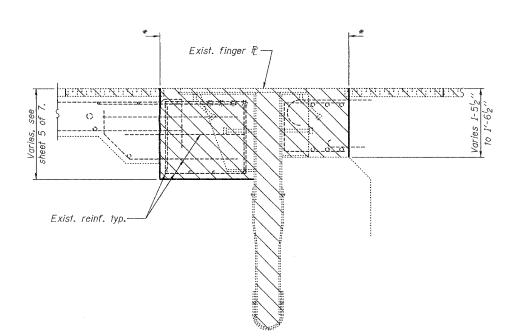

SECTION F-F

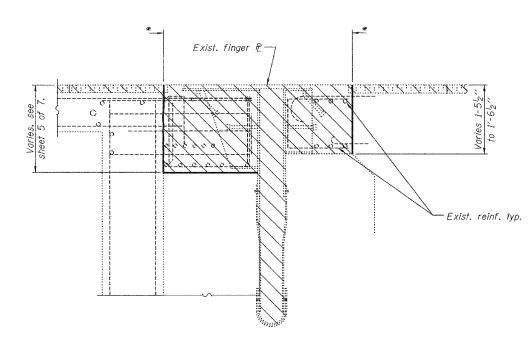

SECTION G-G

BRIDGE REPAIRS I-39 OVER KISHWAUKEE RIVER WINNEBAGO COUNTY STA. 2425+00 SN 101-0134(NB)

±2'-218"

PLAN AT NORTH ABUTMENT

DESIGNED		ATH	
CHECKED	AJB_		
DRAWN	b	aliva	
CHECKED	ATH	AJB	

...\projects\dab00036\1010134.dgn 3/19/2007 B: 29:37 AM

Notes:

Hatched areas indicate removal.

Longitudinal reinforcement extending into removed area shall be cleaned, straightened and incorporated into the new construction.

* Perimeters of concrete removal shall be saw cut

 $^3\!4''$ prior to the removal of the concrete. The cost of removing the existing finger plate assembly, trough and associated hardware is included with Concrete Removal.