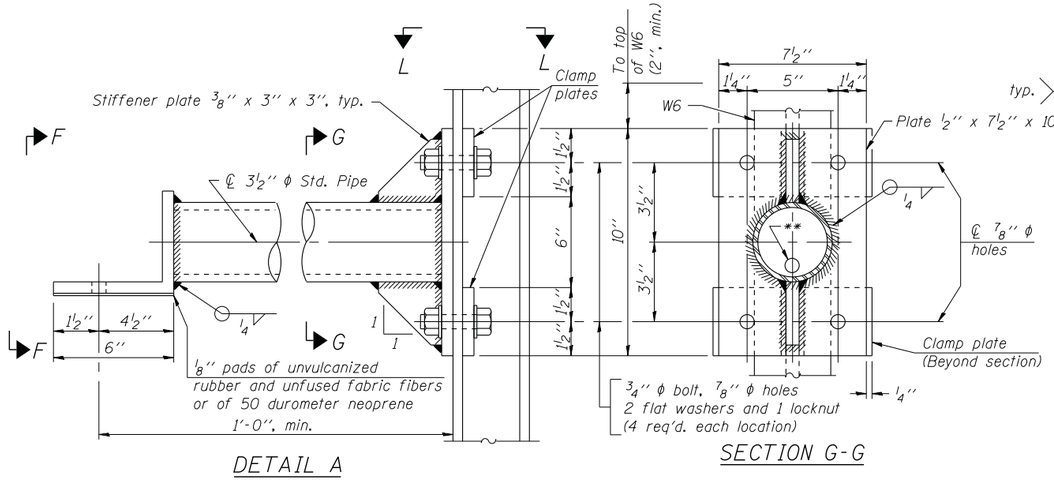

DETAIL A

SECTION G-G

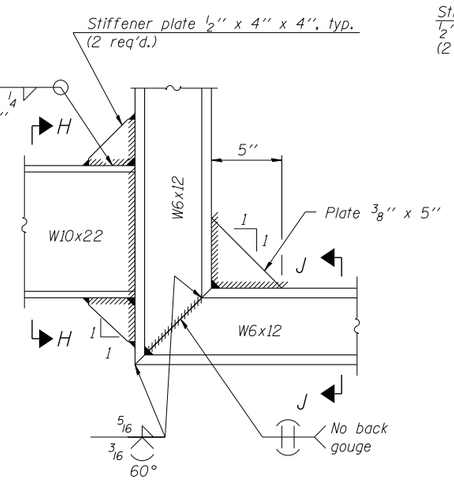

DETAIL B - WELDED W10x22 TO W6x12 CONNECTION

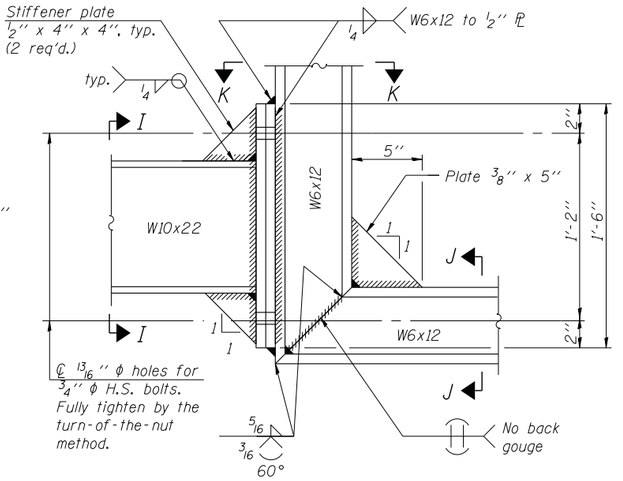

DETAIL B - ALTERNATE BOLTED W10x22 TO W6x12 CONNECTION

Alternate may be substituted by contractor to facilitate construction or galvanizing, especially on long struts for skewed bridges.

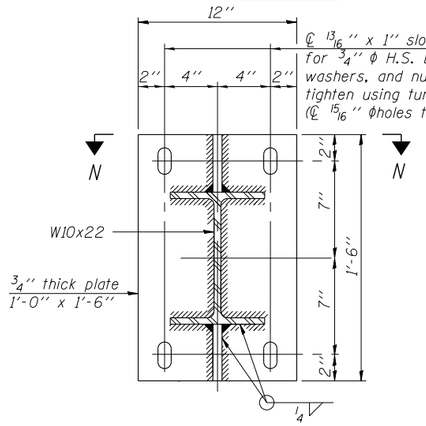

SECTION C-C

Steel beam or girder connection plate details

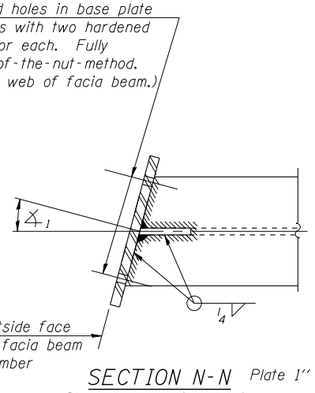

SECTION N-N Plate 1" x 12" x 1'-6"

Skewed connection detail for W10x22 to facia beam.

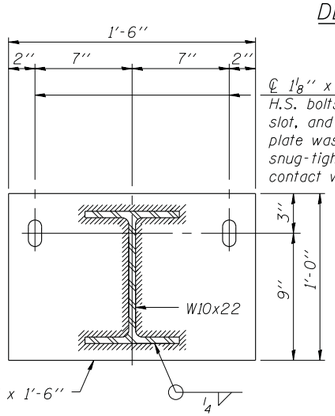

SECTION D-D

Concrete beam or girder connection plate details.



SECTION E-E

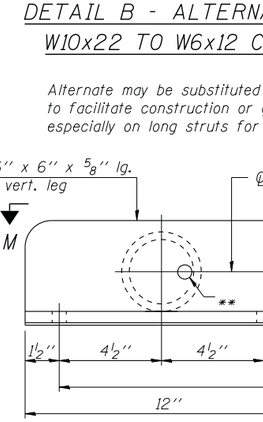

VIEW F-F

** 13/16" ϕ holes for galvanizing. After galvanizing, install 7/8" ϕ A307 hot-dip galvanized bolt to close hole in angle. (No bolt required in 1/2" plate.)

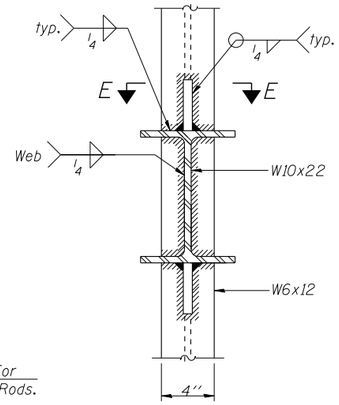

SECTION H-H

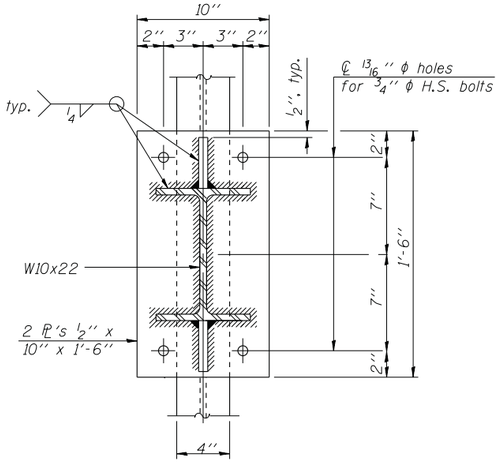

SECTION I-I

Note: For constant slab overhang at facia beam, ∠1 = ∠2 = sign angle. For flared beams or other special cases where ∠1 ≠ ∠2, ∠1 = sign angle.



SECTION J-J

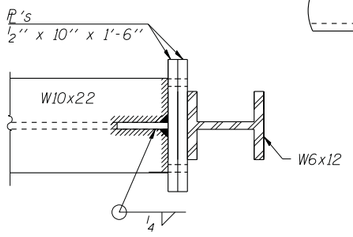

SECTION K-K

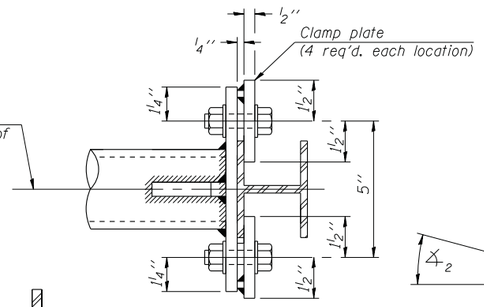

SECTION L-L

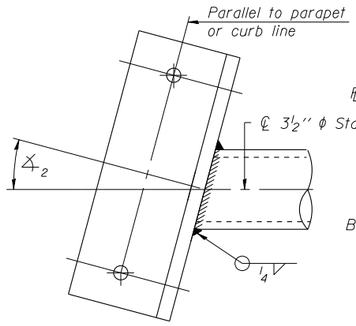

SECTION M-M

Skewed connection detail for 3 1/2" ϕ pipe to parapet.

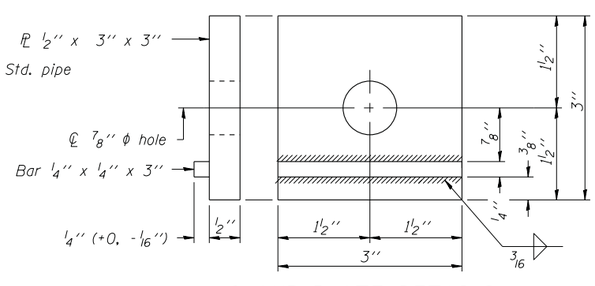

CLAMP PLATE DETAILS

BM-3

7-1-10

*I-290/IL-53 FAI 290/FAP 342

FILE NAME =	USER NAME =	DESIGNED - ABW	REVISED
		CHECKED -	REVISED
	PLOT SCALE =	DRAWN - KAR	REVISED
	PLOT DATE =	CHECKED -	REVISED

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BRIDGE MOUNT SIGN STRUCTURES
CONNECTION DETAILS

SHEET NO. B3 OF 4 SHEETS

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	2011-024-SG	COOK/DuPAGE	132	123
		CONTRACT NO. 60P24		
	ILLINOIS FED. AID PROJECT			