


SUMMARY OF QUANTITIES				CONSTRUCTION TYPE CODE					SUMMARY OF QUANTITIES				CONSTRUCTION TYPE CODE				
CODE NO	ITEM	UNIT	TOTAL QUANTITIES	ROADWAY 1000					CODE NO	ITEM	URBAN 100% STATE UNIT	TOTAL QUANTITIES	ROADWAY 1000				
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	100	100					70300260	TEMPORARY PAVEMENT MARKING - LINE 12"	FOOT	1350	1350				
25200110	SODDING, SALT TOLERANT	SQ YD	100	100					70300280	TEMPORARY PAVEMENT MARKING - LINE 24"	FOOT	400	400				
40600200	BITUMINOUS MATERIALS (PRIME COAT)	TON	25	25					70301000	WORK ZONE PAVEMENT MARKING REMOVAL	SQ FT	2000	2000				
40600300	AGGREGATE (PRIME COAT)	TON	105	105					*78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	110	110				
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	40	40					*78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	11300	11300				
40600826	POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50	TON	1085	1085					*78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	1900	1900				
40600895	CONSTRUCTING TEST STRIP	EACH	2	2					*78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	1350	1350				
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	465	465					*78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	400	400				
40603595	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90	TON	2570	2570					*78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	300	300				
42001300	PROTECTIVE COAT	SQ YD	175	175					78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	225	225				
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	150	150					*88600600	DETECTOR LOOP REPLACEMENT	FOOT	1189	1189				
44000159	HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"	SQ YD	26200	26200					X0322256	TEMPORARY INFORMATION SIGNING	SQ FT	51	51				
44000600	SIDEWALK REMOVAL	SQ FT	150	150					*4067107	<del>POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50</del>	<del>TON</del>	<del>1085</del>	<del>1085</del>				
44001700	COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT	FOOT	700	700					Z0018500	DRAINAGE STRUCTURES TO BE CLEANED	EACH	5	5				
44201803	CLASS D PATCHES, TYPE II, 13 INCH	SQ YD	525	525					Z0048665	RAILROAD PROTECTIVE LIABILITY INSURANCE	L SUM	1	1				
44201807	CLASS D PATCHES, TYPE III, 13 INCH	SQ YD	210	210					40601005	HOT-MIX ASPHALT REPLACEMENT OVER PATCHES	TON	230	230				
44201809	CLASS D PATCHES, TYPE IV, 13 INCH	SQ YD	315	315					40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	1	1				
55039700	STORM SEWERS TO BE CLEANED	FOOT	500	500					42300400	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH	SO YD	20	20				
60252800	CATCH BASINS TO BE RECONSTRUCTED	EACH	7	7					44000200	DRIVEWAY PAVEMENT REMOVAL	SO YD	25	25				
60300105	FRAMES AND GRATES TO BE ADJUSTED	EACH	5	5					Z0004530	HOT-MIX ASPHALT DRIVEWAY PAVEMENT, 8"	SO YD	5	5				
60300305	FRAMES AND LIDS TO BE ADJUSTED	EACH	53	53					44002214	HOT-MIX ASPHALT REMOVAL OVER PATCHES, 3 1/2"	SO YD	1160	1160				
60300310	FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)	EACH	24	24													
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	6	6													
67100100	MOBILIZATION	L SUM	1	1													
70102625	TRAFFIC CONTROL AND PROTECTION, STANDARD 701606	L SUM	1	1													
70102635	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	L SUM	1	1													
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	6000	6000													
70300210	TEMPORARY PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	110	110													
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	11300	11300													
70300240	TEMPORARY PAVEMENT MARKING - LINE 6"	FOOT	1900	1900													

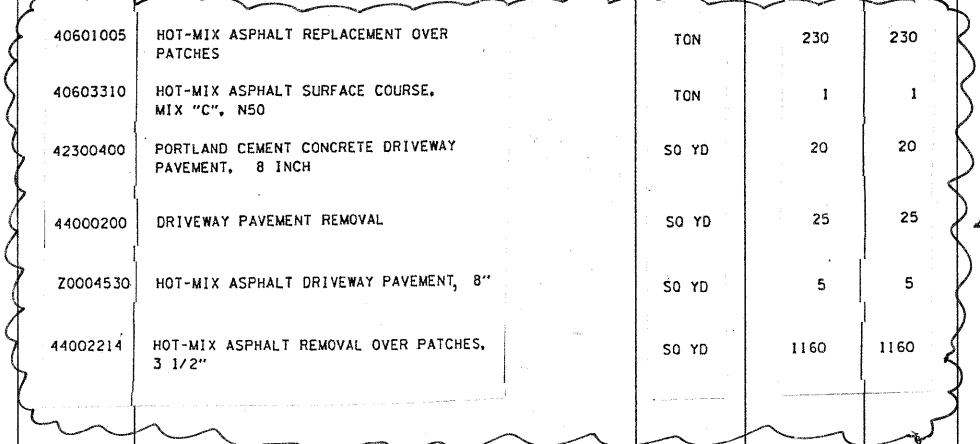

Rev. 2-16-10