

SECOND STREET

323+00

324+00

325+00

MATCHLINE


- 1 BLUESTONE AND PLANTING STRIP REMOVAL ENLARGEMENT, TYPICAL
- 2 EARTH EXCAVATION, TYPICAL
- 3 CONCRETE FOUNDATION REMOVAL OUTSIDE PLANTER, TYPICAL

LEGEND

- EXISTING BLUESTONE REMOVAL (SEE DETAIL 1 / 8)
- EARTH EXCAVATION (SEE DETAIL 2 / 8)
- CONCRETE FOUNDATION REMOVAL OUTSIDE OF PLANTER (SEE DETAIL 3 / 8)
- CONCRETE FOUNDATION REMOVAL WITHIN OF PLANTER (SEE DETAIL 4 / 8)

SITE PREPARATION AND REMOVAL NOTES

1. LAYOUT OF PLANTERS TO BE APPROVED BY THE ENGINEER PRIOR TO REMOVALS COMENSING.
2. ALL ITEMS INDICATED TO BE REMOVED SHALL BE TAKEN OFF SITE AND DISPOSED OFF FOLLOWING ALL LOCAL CODES AND ORDINANCES, UNLESS OTHERWISE SPECIFIED.
3. REMOVE CONCRETE PAVING TO NEAREST JOINT WHERE INDICATED AND REMOVE STONE PAVING TO NEAREST WHOLE PIECE.
4. ALL SAW CUTS REQUIRED FOR REMOVAL OF AN ITEM SHALL BE INCLUDED IN THE COST OF THAT ITEM. ALL SAW CUTS FOR PROPOSED ITEMS SHALL BE INCLUDED IN THE COST OF THAT ITEM.
5. PROTECT ALL ITEMS DESIGNATED TO REMAIN. CONTRACTOR RESPONSIBLE TO REPAIR ALL DAMAGE TO ITEMS DESIGNATED TO REMAIN.
6. SEE LAYOUT PLAN AND DETAILS FOR SPECIFIC LIMITS OF REMOVALS.
7. CAREFULLY REMOVE EXISTING BLUESTONE PAVING AS NECESSARY TO ALLOW FOR CONSTRUCTION OF PROPOSED PLANTERS. REMOVE WHOLE PIECES OF BLUESTONE TAKING CARE NOT TO DAMAGE ADJACENT BLUESTONE PIECES TO REMAIN.

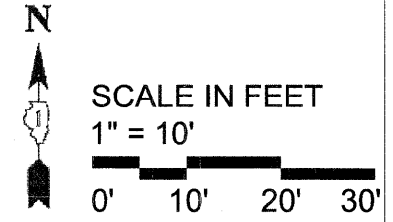

FILE NAME =	USER NAME = \$USERS	DESIGNED - TCK/MEU	REVISED - DECEMBER 1, 2009	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	REMOVALS PLAN WEST DUNDEE STREETSCAPE PROJECT	F.A.P. RTE. 341	SECTION 09-00056-00-LS	COUNTY KANE	TOTAL SHEETS 20	SHEET NO. 6		
PLOT SCALE = \$SCALES	CHECKED - TCK/TRR	DATE - OCTOBER 16, 2009	REVISED -			SCALE: 1" = 20'	SHEET NO. 6 OF 20 SHEETS	STA. 323+23.90 TO STA. 325+50.00	CONTRACT NO. 63418			
PLOT DATE = \$DATES	DATE - OCTOBER 16, 2009	REVISED -				FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT ARA-9003(529)						