

ACCESS DOOR

<u> </u>	FINIAL SAME FINISH AS DECORATIVE CAP, CAGE / LEGS AND POLE
	15 1/4"× 23 1/4" CAGED ACRYLIC ACORN
	GLASS REFRACTOR, LED MODULE, 82 WHITE CREE LEDS (4 ARCS, 1 RND) WITH TYPE 3 OPTICS
	BALLAST COMPARTMENT
	WEATHER RESISTANT GFI RECEPTACLE WITH NEMA 3R IN USE COVER
	PLANTER ARMS 90° LEFT OF ACCESS DOOR
	THE (2) 7/9// DIA DANNED ADMS
20,-1 1/2"	THE (2) 7/8" DIA, BANNER ARMS ARE 37" APART FROM THE TOP OF THE UPPER ARM TO THE BOTTOM OF THE LOWER ARM 90° RIGHT OF ACCESS DOOR
500	
	20"
18,	
	5" DIA. FLUTED POLE .188 WALL THICKNESS 6061-T6 STRUCTURAL GRADE ALUMINUM
13,	POLE WELDED FOR SINGLE UNIT CONSTRUCTION
	MANUFACTURER'S IDENTIFICATION TAG
	ACCESS DOOR SECURED
	WITH STAINLESS STEEL ALLEN HEAD SCREWS FUSE BLOCKS FOR 240V FIXTURE & 120V RECEPTACLE.
	FIXTURE & 120V RECEPTACLE. WIRE TO EXISTING CIRCUITRY.
	19" DIA. BASE, 1.00 FLOOR THICKNESS. 4 ANCHOR BOLTS AND ONE GROUND
	THICKNESS. 4 ANCHOR BOLTS AND ONE GROUND LUG. BASE TO MATCH EXISTING BOLT PATTERN
i	


DECORATIVE LIGHT POLE, ALUMINUM, 18' MOUNTING HEIGHT DETAIL N.T.S.

FIXTURE SCHEDULE							
FIXTURE	MANUFACTURER	CATALOG NUMBER	NO. OF	LAMP TYPE	VOLTAGE	DESCRIPTION	
NUMBER			LAMPS				
	STERNBERG	1190ALED/5P/PT/7118FP5/4A1R45T3/ML/G/VG/PA478/DBA	T			PEDESTRIAN PERIOD STYLE LIGHT FIXTURE MOUNTED ON	
DECORATIVE LIGHT POLE,	BEACON	T4/AC/H1/C4/LED80-240-D/DIR3/VG/PLA/VG 2XAA-0020/VG CEAB-BC/5/VG SHO5/F/18/5M/MAT/VG/GFI	1	LED MODULE	240V	18' FLUTTED POLE WITH IESNA TYPE 3 DISTRIBUTION WITH	
ALUMINUM, 18' MOUNTING HEIGHT	SUN VALLEY	CS-6108(FIXTURE)-XXX-80VLED-MT-NW-PT-STD FINISH//75-(DECO COLLAR)-1070-18-(2)FBA-20-(1)XAT-WM-BEB-(A)GFI/WPI/UCVR-STD FINISH	1		1	LED MODULE 4500K. WITH GFI RECEPTACLE	
	OR APPROVED EQUAL		]		1	ACCESSORIES: PLANTER ARM, AND DOUBLE BANNER ARMS	
and the second s			1		1	FINISH TO BE "VERDE" GREEN ANTIQUED WITH GREEN AND	
			1		1	BLACK. FINISH TO HAVE 5 YEAR WARRANTY	
			l		1	PROVIDE 240 FUSE BLOCK IN BASE FOR LED MODLE AND	
		L	<u> </u>			120V FUSE BLOCK MODULE FOR GFI	
	STERNBERG	1190ALED/5P/PT/7112FP5/4A1R45T3/ML/G/VG/FH			1	PEDESTRIAN PERIOD STYLE LIGHT FIXTURE MOUNTED ON	
DECORATIVE LIGHT POLE,	BEACON	T4/AC/H1/C4/LED80-240-D/DIR3/VG/ FLH/VG CEAB-BC/5/VG SHO5/F/12/5M/MAT/VG/GFI	1	LED MODULE	240V	12' FLUTTED POLE WITH IESNA TYPE 3 DISTRIBUTION WITH	
ALUMINUM, 12' MOUNTING HEIGHT	SUN VALLEY	CS-6108(FIXTURE)-XXX-80VLED-MT-NW-PT-STD FINISH//75-(DECO COLLAR)-1070-12-(1)FFA-GFI/WPIUCVR-STD FINISH				LED MODULE RATED AT 94W, 4500K. WITH GFI RECEPTACLE	
	OR APPROVED EQUAL		1		ı	ACCESSORIES: FLAGHOLDER	
					I .	FINISH TO BE "VERDE" GREEN ANTIQUED WITH GREEN AND	
			1		l	BLACK. FINISH TO HAVE 5 YEAR WARRANTY	
			1		I	PROVIDE 240 FUSE BLOCK IN BASE FOR LED MODLE AND	
						120V FUSE BLOCK MODULE FOR GFI	



FLAGHOLDER STREET SIDE

ACCESS DOOR

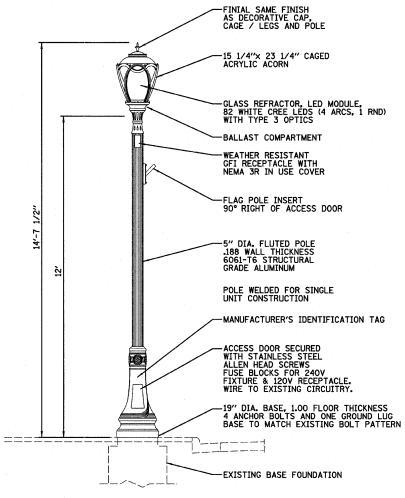

DECORATIVE LIGHT POLE, ALUMINUM, 12' MOUNTING HEIGHT DETAIL N.T.S.

EFFINGHAM DOWNTOWN STREETSCAPE

CITY OF EFFINGHAM EFFINGHAM COUNTY LIGHTING DETAILS

SCALE: SHEET NO. OF SHEETS STA. TO STA.

Farnsworth GROUP 104 N. Second Street, Suite A Effinghem, Illimole 82401 217/342-8888, 217/342-5883 fex

DRAWN BY
DRR

DATE
08/22/11
CHECKED BY
RDY

FILE NO.
24-8575
BOOK NO.
SHEET NO.
58 OF 59

/21/2012 110049 Lighting