STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

ROUTE NO. SECTION SHEET NO. 21 TOTAL F.A.P. 301 27 SHEETS 57 40 -HBR-2 WINNEBAGO

Contract #64D50

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.


Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coaled according to the requirements for reinforcement bars.


Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:

Minimum *Pull-out Strength = $0.66 \times fy \times A_t$

- Where fy = Yield strength of lapped reinforcement bars in ksi. A_t = Tensile stress area of lapped reinforcement bars. * = 28 day concrete


BAR SPLICER ASSEMBLIES				
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length	Strength Requirements		
			Min. Pull-Out Strength kips - tension	
#4	1'-8''	14.7	7.9	
#5	2'-0''	23.0	12.3	
#6	2'-7''	33.1	17.4	
#7	3′-5′′	45.1	23.8	
#8	4'-6''	58.9	31.3	
#9	5′-9′′	75.0	39.6	
#10	7′-3′′	95.0	50.3	
#11	9'-0''	117.4	61.8	

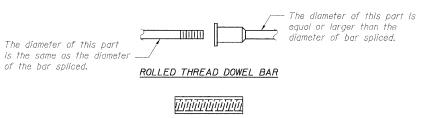




BAR SPLICER ASSEMBLY ALTERNATIVES

** Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

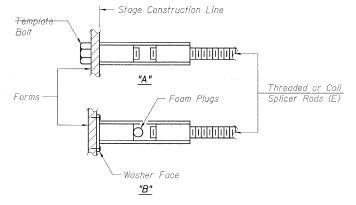

INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E) : Indicates epoxy coating.

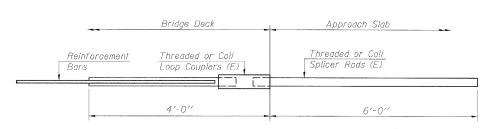


FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

Bar Splicer for #5 bar Min. Capacity = 23.0 kips - tension Min. Pull-out Strength = 12.3 kips - tension No. Required =

GUN / OAO DESIGNED TCS / GUN DRAWN FCO CHECKED

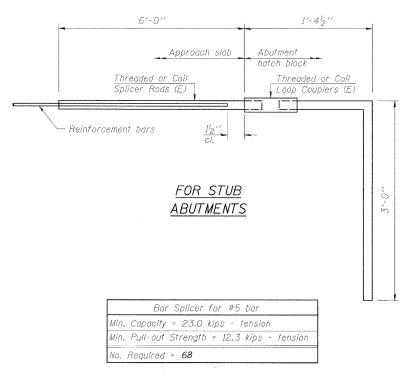

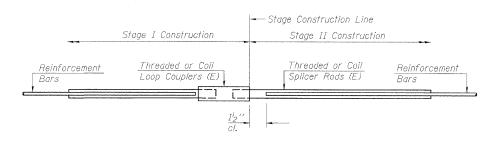

STANDARD

Bar Size	No. Assemblies Required	Location

BAR SPLICER ASSEMBLY DETAILS MERIDIAN ROAD OVER US 20 F.A.P. 301 (US 20) - SEC. 1-HBR-2 WINNEBAGO COUNTY STATION 100+00 STRUCTURE NO. 101-0096





