


INDEX OF SHEETS

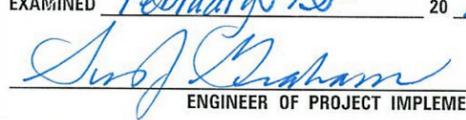
SHEET NO.	DESCRIPTION
1.	COVER SHEET
2.	INDEX OF SHEETS, STANDARDS, GENERAL NOTES & SIGNATURE
3.	SUMMARY OF QUANTITIES
4.	PATCHING SCHEDULE
5.	PROJECT LOCATION MAP
6-9.	PROJECT TYPICAL SECTIONS

STANDARDS

STANDARD NO.	DESCRIPTION
442201-03	CLASS C AND D PATCHES
701101-05	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' TO 24" FROM PAVEMENT EDGE
701106-02	OFF-RD OPERATIONS, MULTILANE, MORE THAN 15' AWAY
701400-09	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701401-11	LANE CLOSURE, FREEWAY/EXPRESSWAY
701411-09	LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP, FOR SPEED \geq 45 MPH
701901-07	TRAFFIC CONTROL DEVICES

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
DISTRICT 6**

EXAMINED February 23rd 20 18

 ENGINEER OF OPERATIONS

EXAMINED February 15th 20 18

 ENGINEER OF PROJECT IMPLEMENTATION

EXAMINED February 14 20 18

 ENGINEER OF PROGRAM DEVELOPMENT

MIXTURE REQUIREMENTS

THE FOLLOWING MIXTURE REQUIREMENTS ARE APPLICABLE FOR THIS PROJECT

MIXTURE USE(S):	PARTIAL DEPTH PATCHING TOP 2" *	PARTIAL DEPTH PATCHING LOWER LIFTS
AC/PG:	PG 64-22	PG 64-22
DESIGN AIR VOIDS:	4.0% @ N90	4.0% @ N90
MIXTURE COMPOSITION:	IL 9.5	IL 9.5
FRICITION AGGREGATE:	MIX D	N/A
QUALITY MANAGEMENT:	QC/QA	QC/QA
SUBLOT SIZE:	N/A	N/A

* THIS MIXTURE SHALL BE USED FOR THE TOP 2" OF ALL CLASS D PATCHES AND SHALL BE PLACED WITH A PAVING MACHINE.



REV. 4-12-2018