

NOTES: 1. THE BITUMINOUS SHOULDER SHALL EXTEND UNDER THE TRAFFIC BARRIER TERMINAL

2. GUARD RAIL MAY BE PLACED AT THE BACK OF CURB WHEN DIRECTED BY THE ENGINEER.

BASIS OF PAYMENT: BITUMINOUS SHOULDER 150 (6) WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER m<sup>2</sup> (sq. yd.) AS "BITUMINOUS SHOULDER 150 (6)."


> STEEL PLATE BEAM GUARD RAIL AND TRAFFIC BARRIER TERMINAL, OF THE TYPE SPECIFIED WILL BE PAID FOR SEPARATELY.

DETAILS FOR STEEL PLATE BEAM GUARD RAIL ADJACENT TO CURB AND GUTTER [FOR ROADWAY SPEED 60 kmh (35 MPH) TO 70 kmh (45 MPH)]

SECTION Cook 81 74 90 TO STA. FED. ROAD DIST. NO. \_ ILLINOIS FED. AID PROJECT

62746

\* (1012, 1214, 1415, & 1517) RS-3

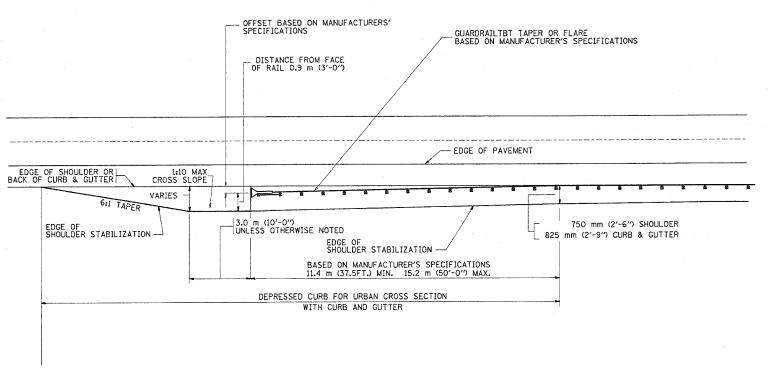

STABILIZATION AT TBT TY. 1 SPL.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

DETAILS FOR STEEL PLATE BEAM GUARD RAIL ADJACENT TO CURB AND GUTTER

STABILIZATION AT TBT TY 1 SPL.

SCALE: NONE DATE 4/11/2005

DRAWN BY Jis CHECKED BY

REVISION DATE: 08/28/00

4/11/2005 W:\diststd\bd34.dgn VI+BD34