


# REFLECTOR MEDIAN SURFACE -EPOXY FILLER AS REQUIRED SECTION VIEW

### NOTES

- 1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
- 2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
- 3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.


## OPTION 1

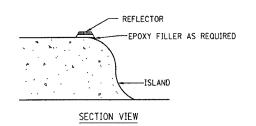


#### NOTES


- 1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
- 2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
- 3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.

## OPTION 2

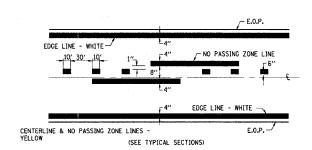


## PAVEMENT MARKING

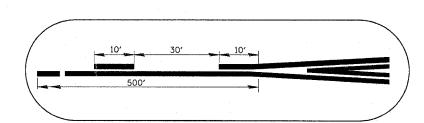

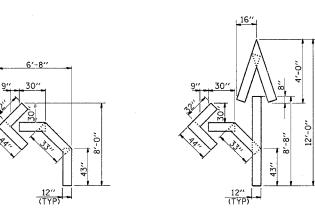

QUANTITY			
	INE = 16 LIN. FT. LINE = 48 LIN. FT.		

QUANTITY 12" LINE = 29 LIN. FT. OR 4" LINE = 87 LIN. FT.

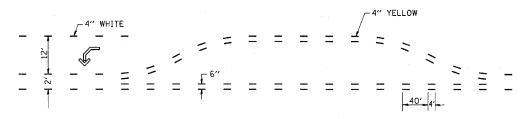

SHORT-TERM PAVEMENT MARKING FOR MEDIANS AND ARROWS

REVISIONS	ILLINOIS DEPARTMENT OF TRANSPORTATION
NAME DATE	TELINOIS DELANTMENT OF TRANSPORTATION
	DETAILO
	DETAILS

SCALE: VERT. HORIZ.

DRAWN BY CHECKED BY

CONTRACT NO. 66534

COUNTY

IROQUOIS TO STA. FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT

F.A.P. RTE. 681

SECTION

118 N