


## MULTI-LANE WEAVE VERTICAL PANELS OR BARRICADES 060 M (200') ON TANGENT 030 M (100') ON CURVE -\* \* WI-6R(0)-6030 BARRICADE MINIMUM ① **②** (4)<sup>1</sup> 32 150 M (500') MINIMUM 1) 2 WI-6R(0)-6030 AT 4 TYPE III BARRICADE SEE HIGHWAY STANDARD 701400 \* \* IF A TYPE III BARRICADE WITH AN ATTACHED $\slash$ The number of arrows SIGN PANEL WHICH MEET NCHRP 350 IS NOT ON THESE SIGNS SHALL AVAILABLE, THE SIGNS MAY BE MOUNTED LANES OPEN TO TRAFFIC DIRECTLY IN FRONT OF THE BARRICADE ① TEMPORARY PAVEMENT MARKING TO BE INSTALLED: CONTINUOUS YELLOW LEFT EDGE LINE. LANE LINES 3 M-9 M (10'-30') SKIP-DASH, WHITE. CONTINUOUS WHITE RIGHT EDGE LINE. @ EXISTING PAVEMENT MARKING TO BE REMOVED. TYPE II BARICADE, DRUM, OR VERTICAL BARRICADE WITH STEADY BURN MONODIRECTIONAL LIGHT AT 15 M (50') C-C SPACING. @ TYPE II BARICADE, DRUM, OR VERTICAL BARRICADE WITH STEADY BURN MONODIRECTIONAL LIGHT AT 30 M (100') C-C SPACING.

ALL TRAFFIC 1.2 m × 2.4 m (4'x8'); 25 (1) BORDER; 250 (10) CAPITAL LETTERS BACKGROUND SHEETING SHALL BE THE SAME AS ALL DIAMOND SHAPED CONSTRUCTION SIGNS.

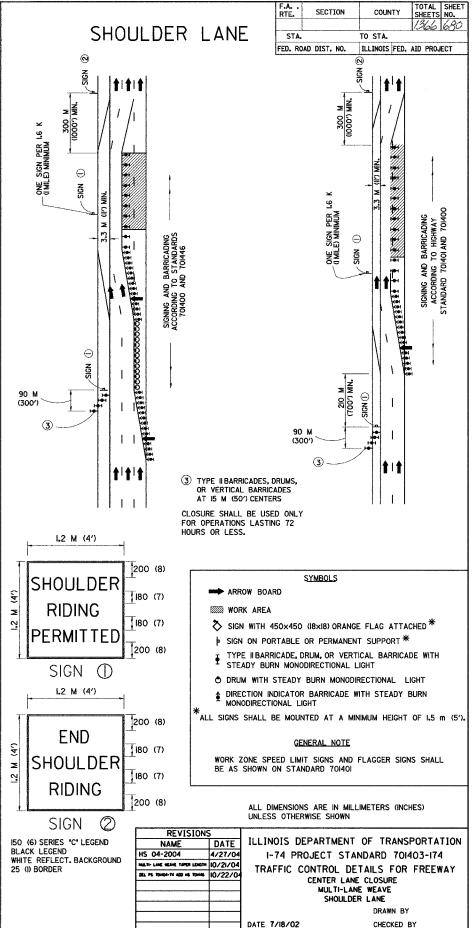

68201

TOTAL SHEET