


DETAIL OF CORRUGATED MEDIAN (DOWELED)

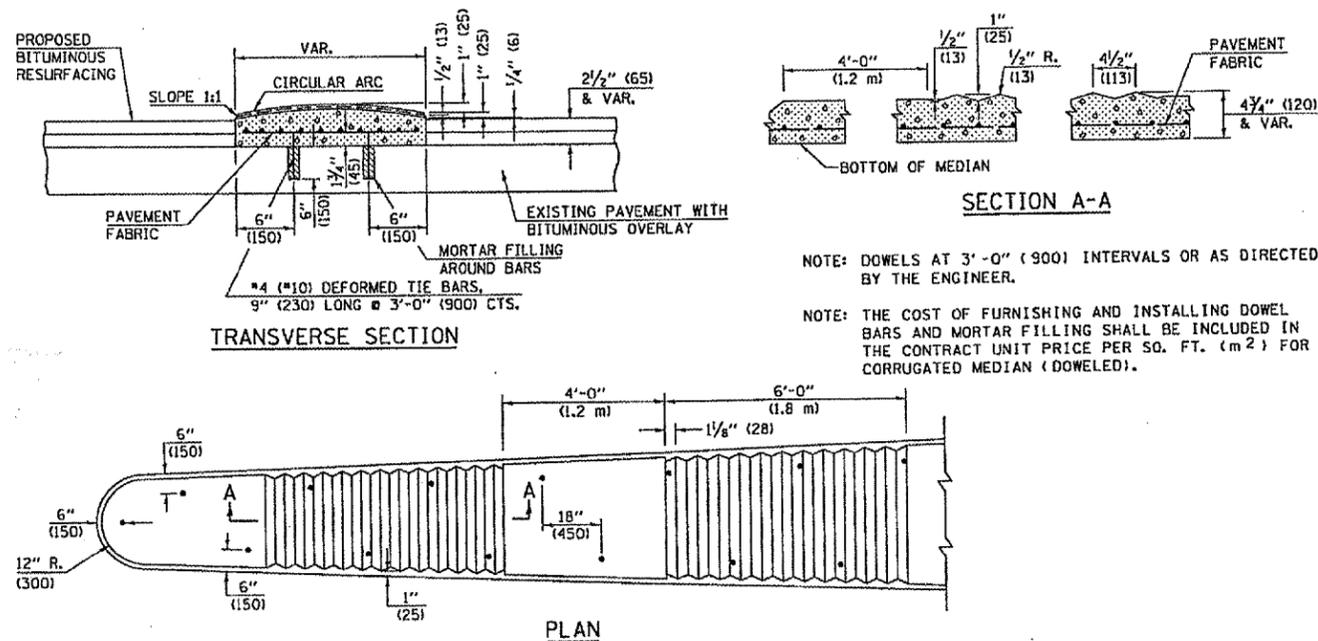


NOTE: DOWELS AT 3'-0" (900) INTERVALS OR AS DIRECTED BY THE ENGINEER.

NOTE: THE COST OF FURNISHING AND INSTALLING DOWEL BARS AND MORTAR FILLING SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE PER SQ. FT. (m²) FOR CORRUGATED MEDIAN (DOWELED).

NAME	DATE	REVISIONS
DESIGNED	J.H.M. 4-89	
CHECKED	J.M.H. 4-89	
CADD NO.	A-5.01	


ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

DETAIL OF PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT MAINLINE

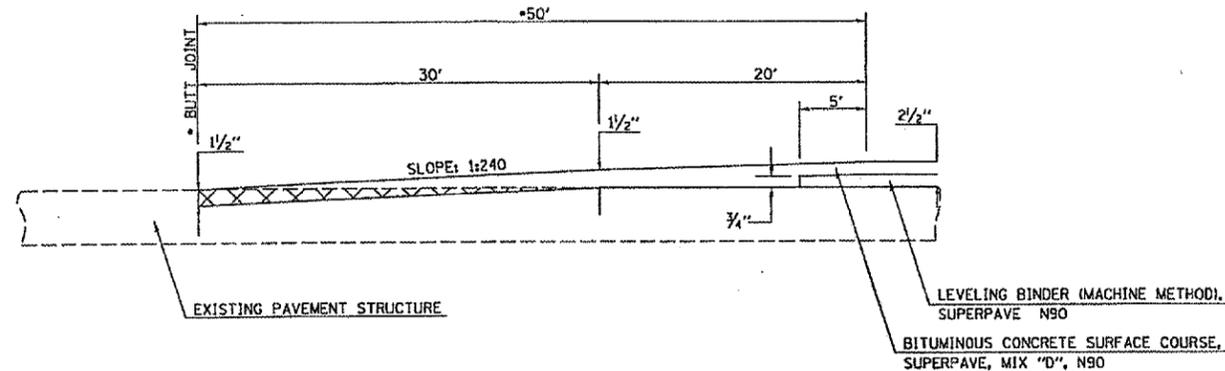


- BUTT JOINT LOCATIONS:
PROJECT START 57+07.00
PROJECT END 157+37.70
- OMISSION FROM RESURFACING STR *056-0033 LT STA 131+40.00 TO LT STA 132+50.00
- OMISSION FROM RESURFACING STR *056-0056 RT STA 131+00.00 TO RT STA 132+10.00
- OMISSION FROM RESURFACING STA 134+71.20 TO STA 136+82.80

DETAIL OF CONCRETE MEDIAN, TYPE SM-6 (SM-15) (DOWELED)

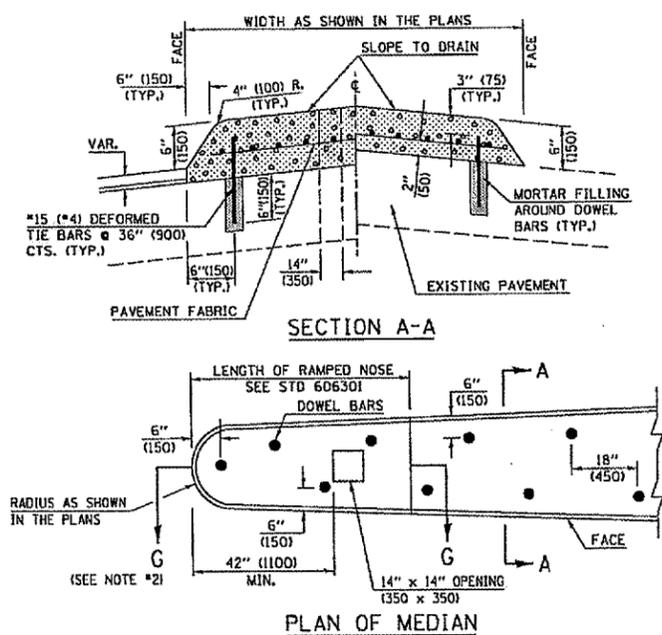

GENERAL NOTES

- THE GENERAL NOTES FOR STANDARD 606301 SHALL APPLY.
- SECTION G-G SHALL BE THE SAME AS SHOWN ON STANDARD 606301.
- DOWEL BARS ϕ 3/8" (900) CTS. OR AS DIRECTED BY THE ENGINEER.
- THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQ FOOT (m²) FOR CONCRETE MEDIAN, TYPE SM-6 (SM-15) (DOWELED), INCLUDING THE COST OF FURNISHING AND INSTALLING THE DOWEL BARS, MORTAR FILLING, PAVEMENT FABRIC AND THE REMOVAL AND DISPOSAL OF THE EXISTING PAVEMENT FOR THE 14" x 14" (350 x 350) OPENING, IF REQUIRED, AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.

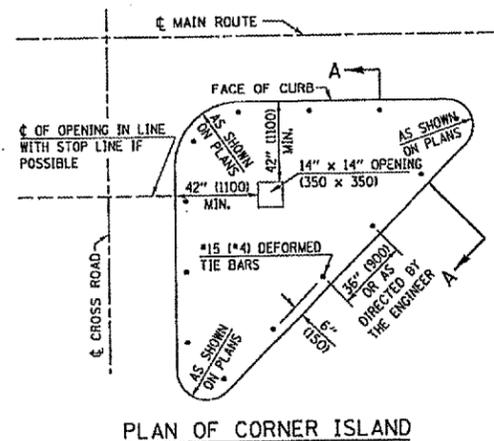

NAME	DATE	REVISIONS
DESIGNED	J.M.H. 1-89	
CHECKED	F.M.S. 1-89	
CADD NO.	A-5.07	

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

DETAIL OF PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT PRIVATE & COMMERCIAL ENTRANCES

