EARTHWORK

MINOR EARTHWORK GRADING MAY BE NECESSARY TO ESTABLISH ADEQUATE CLEARANCE FOR THE PROPOSED FENCE. HOWEVER, THIS WORK IS ANTICIPATED TO BE MINIMAL SINCE THE MAJORITY OF THE PROPOSED ALIGNMENT FOLLOWS THAT OF THE EXISTING FENCE. THEREFORE, EARTHWORK WILL BE CONSIDERED INCIDENTAL TO THE INSTALLATION OF THE PROPOSED FENCE.

THE CONTRACTOR IS RECOMMENDED TO VISIT THE SITE AND INSPECT THE PROPOSED ALIGNMENT.

MOTE

THE CONTRACTOR WILL BE PERMITTED TO ACCESS THE AIRPORT PROPERTY THROUGH ANY OF THE EXISTING GATES THAT ARE IN CLOSE PROXIMITY TO THE WORK TO BE COMPLETED THAT DAY. THE CONTRACTOR WILL BE REQUIRED TO COORDINATE HIS DAILY ACCESS WITH THE RESIDENT ENGINEER AND THE AIRPORT DIRECTOR.

QUANTITY SCHEDULE			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
AR161900	REMOVE CLASS C FENCE	L.F.	21,211
AR161910	REMOVE CLASS C GATE	EACH	9
AR162900	REMOVE CLASS E FENCE	L.F.	5,169
AR162908	REMOVE ELECTRIC GATE	EACH	2
AR162910	REMOVE CLASS E GATE	EACH	15

FENCE REMOVAL NOTES


THE EXISTING FENCE TO BE REPLACED IS 4 FOOT TALL CLASS C-WOVEN WIRE FENCE, 4 FOOT TALL CLASS E - Chain link fence, and 6 foot tall class e - Chain link fence. The contractor is required to remove and dispose of the fence material off the airport property.

THE CONTRACTOR IS REQUIRED TO REMOVE THE EXISTING FENCE IN A MANNER THAT WILL NOT COMPROMISE THE SECURITY AT THE AIRPORT. THE EXISTING FENCE WILL NOT BE REMOVED UNTIL THE PROPOSED FENCE CAN BE INSTALLED IN ITS PLACE.

THE CONTRACTOR WILL BE ALLOWED TO REMOVE THE EXISTING FABRIC FROM THE EXISTING POSTS. THE FABRIC WILL BE LAID DIRECTLY ON THE GROUND TO ALLOW THE REMOVAL OF THE EXISTING POSTS AND THE INSTALLATION OF THE PROPOSED POSTS. ONCE THE CONCRETE ON THE PROPOSED POSTS HAS CURED FOR AT LEAST 3 HOURS THE CONTRACTOR WILL TIE THE EXISTING FABRIC TO THE PROPOSED POSTS. THIS WILL PROVIDE AIRPORT SECURITY WHILE THE PROPOSED CONCRETE CURES AND OBTAINS THE REQUIRED STRENGTH (MINIMUM 3.500 POUNDS IN 14 DAYS), ONCE THE CONCRETE HAS REACHED 3,500 POUNDS THE CONTRACTOR WILL BE ALLOWED TO REMOVE THE EXISTING FABRIC AND STRETCH AND TIE THE PROPOSED FABRIC TO THE PROPOSED POSTS. IN THIS FASHION THE CONTRACTOR WILL REMOVE AND REPLACE THE EXISTING FENCE. ONLY THE EQUIVALENT AMOUNT OF FENCE THAT CAN BE ERECTED IN A DAY'S TIME CAN BE REMOVED IN ORDER TO AVOID UNACCEPTABLE GAPS. THE CONTRACTOR IS CAUTIONED TO BE COGNIZANT OF INCLEMENT WEATHER. EQUIPMENT TROUBLE, OR OTHER UNEXPECTED EVENTS THAT WOULD INTERFERE WITH THE COMPLETION OF A DAYS WORK. A GAP IN THE FENCE WILL NOT BE PERMITTED TO REMAIN OVERNIGHT.

ALL EXISTING FENCE MATERIAL TO INCLUDE FENCE POST, WIRE, HARDWARE, CONCRETE, AND ALL ASSOCIATED MATERIAL SHALL BE REMOVED AND DISPOSED OF OFF THE AIRPORT PROPERTY. DISPOSAL OF THE EXISTING FENCE MATERIAL SHALL BE INCLUDED IN THE COST OF AR161900, AR162900, AR162908, AND AR162910.

THE REMOVAL OF SHRUBS, SMALL TREES, STUMPS, LOGS, ETC. THAT ARE IN THE EXISTING FENCE LINE WILL BE REMOVED AND DISPOSED OF OFF THE AIRPORT SITE. THIS REMOVAL AND DISPOSAL WILL BE CONSIDERED AS AN INCIDENTAL ITEM TO THE FENCE/GATE REMOVAL AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED.



CO055

COLES COUNTY AIRPORT
AUTHORITY
COLESCIENTING


4 08/04/08 C 08/04/08 1L PROJ.: MTO-:

HANSON

H: nson Professional Services Inc. 1525. South Skrth Street :pringfiel, Illinois 82709-2886 Offices Nationwide

INSTALLATION
EXISTING
FENCE
FENCE

4

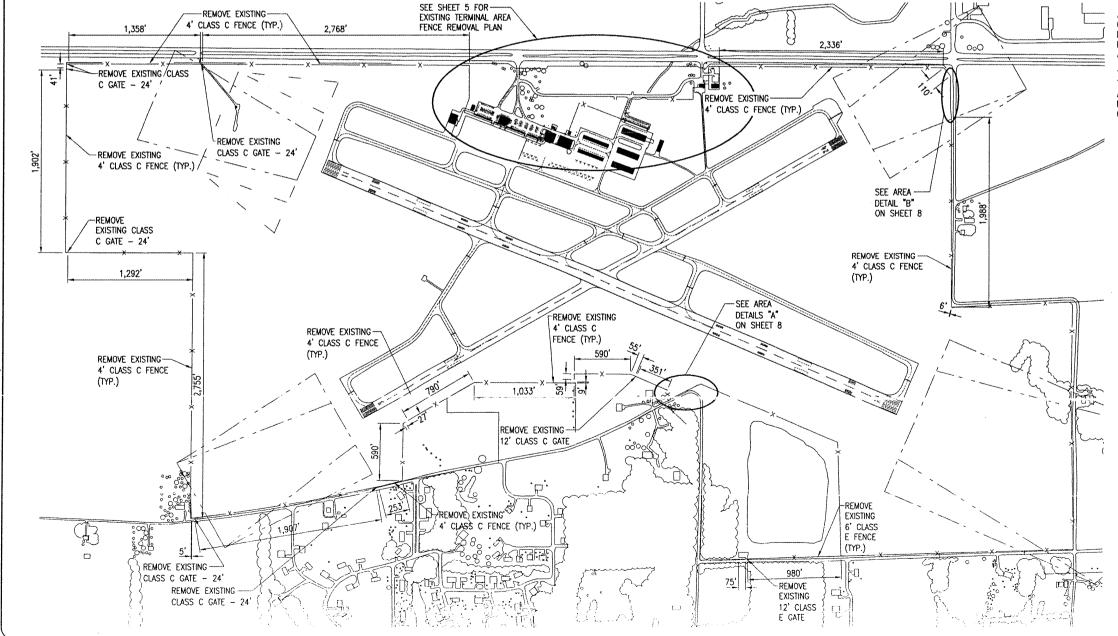

LEGEND

EXISTING IMPROVEMENTS

EXISTING BUILDINGS

EXISTING FENCE

EXISTING FENCE (TO BE REMOVED)

0' 250' 500' 100

HALF SIZE SCALE: 1"= 1000

FULL SIZE SCALE: 1"= 500'

2009 10:45 AW HAGLODO382