

### STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths						
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	
· 3, 4	1'-5''	1'-11''	2'-1"	2'-4"	2'-3"	
5	1'-9''	2'-5"	2'-7"	2'-11''	2'-10"	
6	2'-1"	2'-11"	3'-1''	3'-6"	3'-4"	
7	2'-9"	3'-10"	4'-2"	4'-8''	4'-6"	
8	3'-8"	5'-1"	5′-5″	6'-2"	5'-10"	
9	4'-7"	6'-5"	6'-10''	7′-9′′	7′-5″	

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C


Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Table 5: Epoxy bar, Top bar lap, Class B

Threaded splicer bar length = min. lap length +  $1^{l_2}$ " + thread length


\* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

Location	Bar size	No. assemblies required	Table for minimum
Appr. Slab	#5	126	3
Appr. Slab	#4	36	3
Hatch Block	#6	16	4
Deck	#6	8	4




## INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E): Indicates epoxy coating.

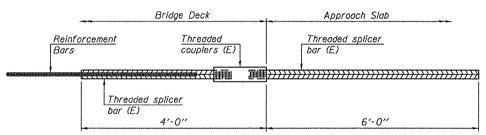

# BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No. required =

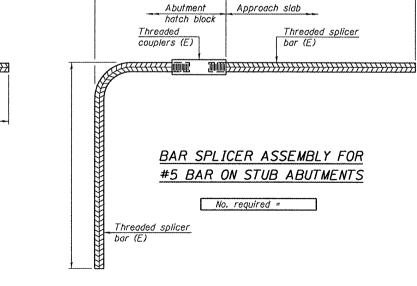



### STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required
***************************************		

### NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See special provision for Mechanical Splicers.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1 DESIGNED IJL CHECKED ATH DRAWN baliva

CHECKED IJL ATH

7-1-10 EXAMINED MARCH 16. 2011 PASSED

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** 

6'-0"

Threaded splicer bar (E)

COUNTY TOTAL SHEETS NO.

BOND 35 11 SECTION BAR SPLICER ASSEMBLY & MECHANICAL SPLICER DETAILS REL SN 003-0009 (EB) & 003-0010 (WB) CONTRACT NO. 76E23 SHEET NO. 8 OF 9 SHEETS