


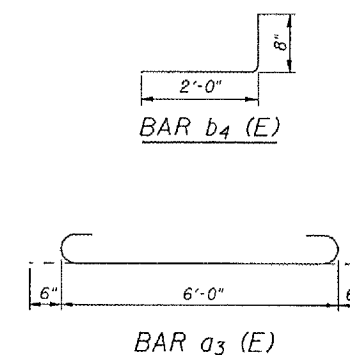


<i>Bar</i>	<i>No.</i>	<i>Size</i>	<i>Length</i>	<i>Shape</i>
a ₁ (E)	321	# 6	28'-2"	_____
a ₂ (E)	2	# 4	28'-2"	_____
a ₃ (E)	24	# 4	7'-0"	C-__
b ₁ (E)	275	# 6	25'-7"	_____
b ₂ (E)	90	# 6	12'-0"	_____
b ₃ (E)	46	# 6	4'-0"	_____
b ₄ (E)	56	# 4	2'-8"	___J
b ₅ (E)	46	# 6	6'-0"	____
<i>Reinforcement Bars, Epoxy Coated</i>			Lbs.	26,710
<i>Concrete Superstructure</i>			<i>Cu. Yds.</i>	83.4
<i>Bar Splicers</i>			<i>Each</i>	56


Notes : Reinforcement bars designated (E) shall be epoxy coated.

Bars indicated thus "24 x 5 - #6 etc..." indicates 24 lines of bars with 5 lengths per line.

See Sheet 20 for abutment reinforcement.

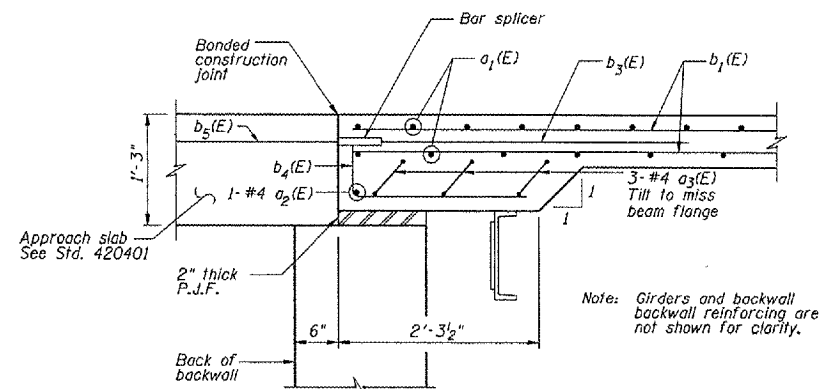

SECTION A-A

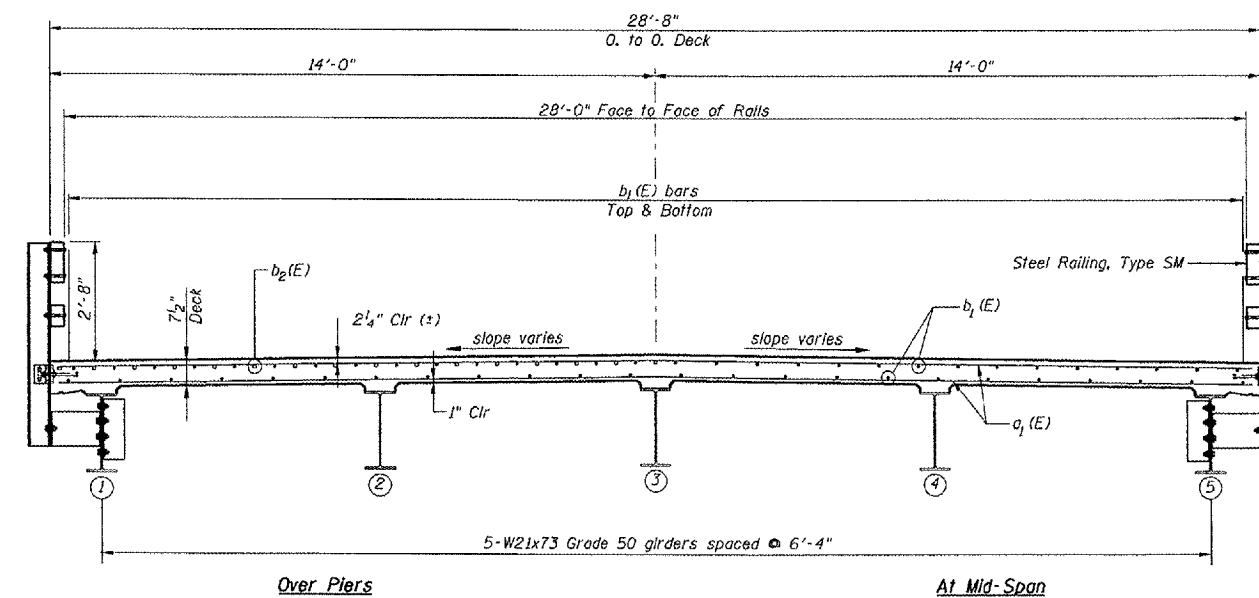

SUPERSTRUCTURE SECTION

Work Sheets 13 & 20 together.

DSGN	K.J. Hoffmann							
DR	K.J. Hoffmann							
CHK	J.R. Wolf							
APVD	J.A. Fraunhofer	NO.	DATE		REVISION		BY	APD

FRAÜENHÖFFER

Frauenhoffer and Associates, P.C. Consulting Engineers
3002 Crossing Court Champaign, IL 61822 217-351-6268

DECK REINFORCING

FAS 1384 (C.H. 27) OVER M. BRANCH OF COPPERAS CREEK
SECTION 07-00117-03-BR
FULTON COUNTY

	SHEET 13
K	DWG NO. 7022-sup.dgn
	DATE OCT 2007
	PROJ NO. 7022