
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

EXISTING DECK BEAM

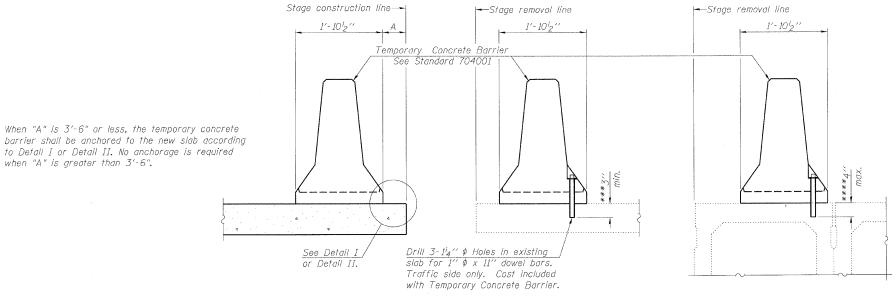

## NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1''x7''x10'' steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate & of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel 12 to the concrete slab or concrete wearing surface with  $2^{-5}8'' \phi$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready

## SECTIONS THRU SLAB OR DECK BEAM

EXISTING SLAB


\*\*\* Dimension shown is minimum required embedment into concrete. If hot mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

\*\*\*\* If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

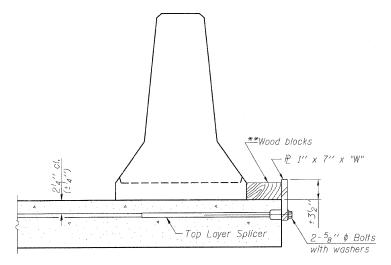


NEW SLAB

DETAIL I

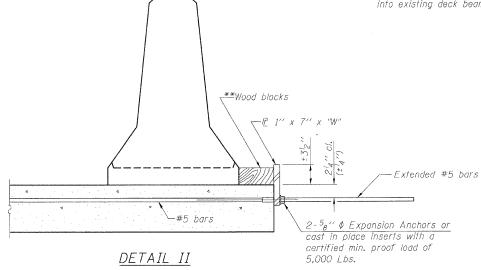

\*\* Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"



## STEEL RETAINER P 1" x 7" x 10"

\* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NO. 049-0017



SH	HEET	NO.	
6	SHE	ETS	

T NO.3	RTE.	
	104	
HEETS		

		-					
F.A.P. RTE.		SEC	TION		COUNTY	TOTAL SHEETS	SHEET NO.
104		W-E	XT-I		LAKE	21	10
					CONTRACT		50J52
FED RO	DAD DIST	NO	THE INOIS FED	Δ1	ID PROJECT		