STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION typ.

Drill and tap $\frac{1}{2}$ "-13x $\frac{3}{4}$ " DP.

for 2" Anchor Studs

4 locations

FI

 $B \blacktriangleleft$

PLAN

1'-518"

1'-44"

1'-4"

1'-2"

3₄"

958"

6"

7/2"

SECTION A-A See Sheet No. 14 for scupper

location relative to parapet.

FI


1

♣

Drill and tap scupper for 4

b" \ stainless steel hexagon


head bolts with lock washers



VANE GRATE DETAIL

7/2"

SECTION B-B




BOLT HOLE DETAIL


ROUTE NO. SECTION COUNTY TOTAL SHEET NO. SHEET NO. 22 FAP 301 177-2 STEPHENSON 47 SHEETS 386 162 ILLINOIS FED. AID PR

Contract No. 64799

Notes:

- All cast iron parts shall be gray iron conforming to the requirements of AASHTO M 105, Class 35B.
- Bolts, anchor studs, washers and nuts shall conform to the requirements of ASTM A 307 and shall be galvanized according to AASHTO M 232.
- Downspouts located on the exterior side of a painted steel fascia beam shall be painted with the finish coat specified for the exterior side of the fascia beam.
- As an alternate, bolts, anchor studs, washers and nuts may be stainless steel according to Article 1006.29(d) of the Standard Specifications.
- Structural steel weldments of equal sections and of the same configuration may be substituted for the cast iron scupper frame. Fillet or full penetration welds shall be used for the weldments. Details shall be submitted to the Engineer for approval. Structural steel weldments shall not be substituted for the cast iron scupper grate. Structural steel frames and downspouts shall be galvanized according to AASHTO M111.
- The Contractor shall take appropriate measures to assure that Protective Coat is not applied to the scupper.
- Cost of the Grate, Frame, Downspout, Anchor Studs, Bolts, Washers and Nuts including complete installation of the scupper shall be paid for at the contract unit price each for Drainage Scupper, DS-11.
- Alternate fiberglass downspout conforming to ASTM D 2996 with a short-time rupture strength hoop tensile stress of 30,000 psi min. may be used in lieu of the cast iron or steel equivalent.

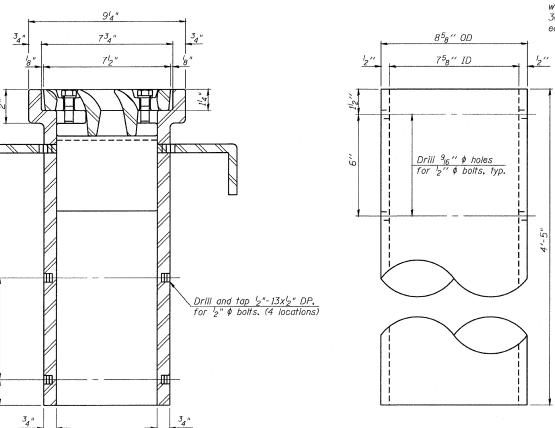



₽	<u> </u>	0F	MA	TEF	<u>RIAL</u>	
	ITEM				UNIT	QUANTIT
		00 11			F /	1

ITEM	UNIT	QUANTITY
Drainage Scupper, DS-11	Each	4

DOWNSPOUT

DRAINAGE SCUPPER, DS-11 F.A.P. ROUTE 301 SECTION 177-2B-1 STEPHENSON COUNTY STATION 540+65.71 STRUCTURE NO. 089-0082

S.CHELBIAN DESIGNED A.HAMMAD

S.CHELBIAN DRAWN J.GRAINAWI CHECKED

DD PARSONS BRINCKERHOFF