

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
64	95-(5,6)PP-3	WASHINGTON	16	1
		ILLINOIS	CONTRACT NO. 76U29	

FOR INDEX OF SHEETS, SEE SHEET NO. 2

PROPOSED
HIGHWAY PLANS

FAI ROUTE 64 (I-64)
SECTION 95-(5,6)PP-3
PAVEMENT PATCHING
WASHINGTON COUNTY

C-98-057-25

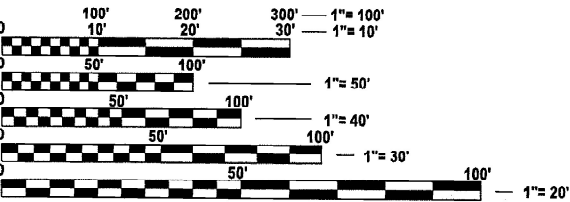


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.


J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: CHERYL KEPLAR
PROJECT MANAGER: BRANDON HUMPHREYS

CONTRACT NO. 76U29

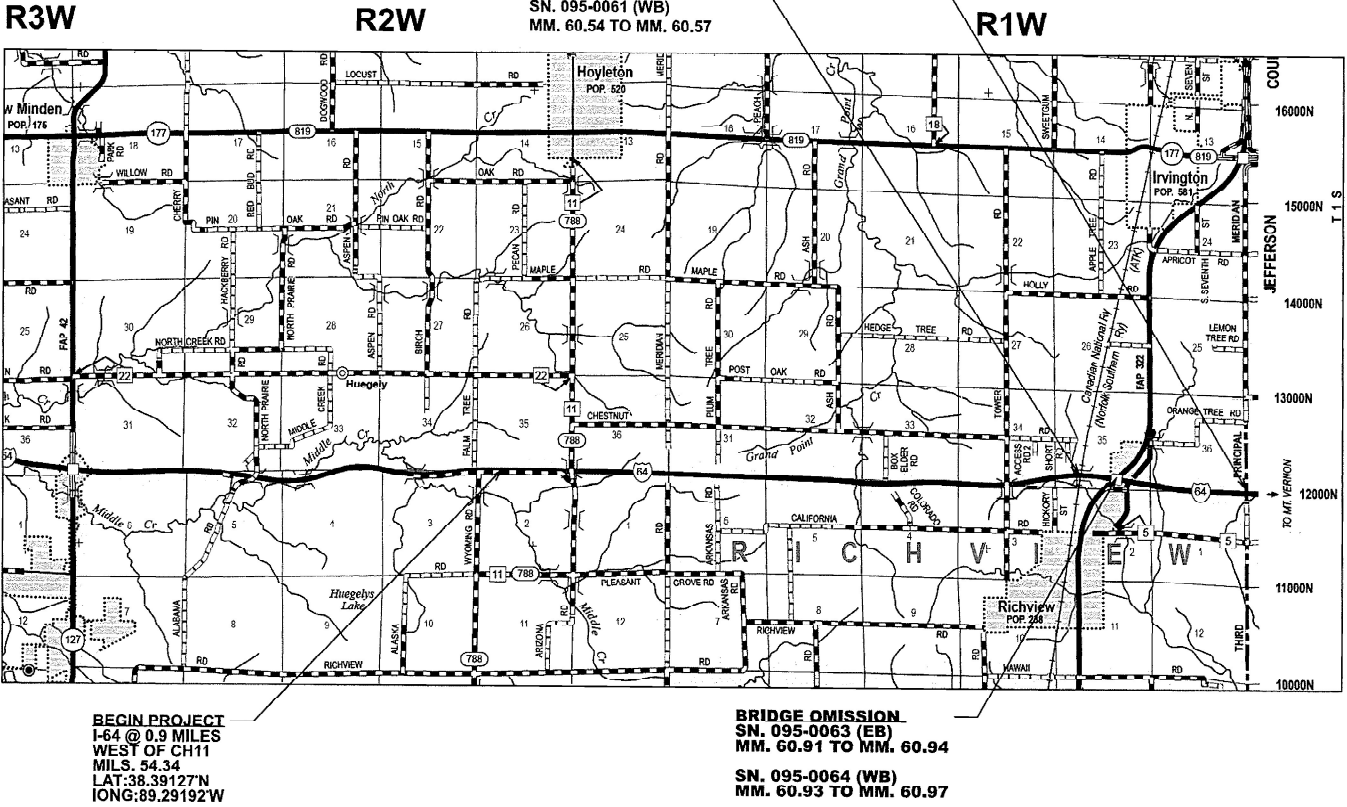

GROSS LENGTH = 42,027 FT. = 7.960 MILE
NET LENGTH = 41,659 FT. = 7.890 MILE

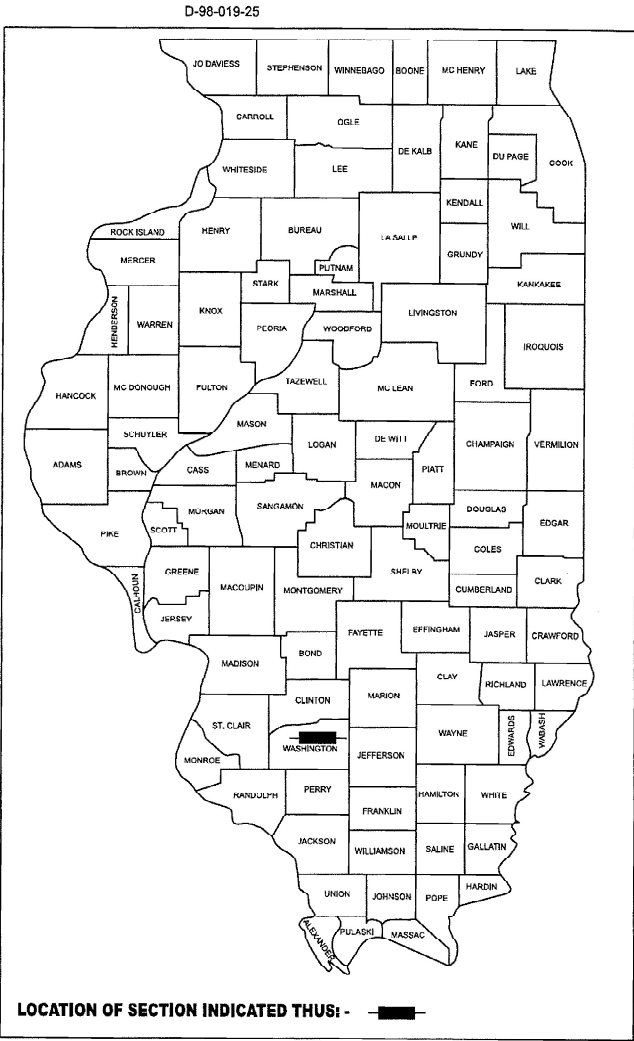

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Dec 6 2024
Kil REGIONAL ENGINEER

January 31 25
See ENGINEER OF DESIGN AND ENVIRONMENT

January 31 25
Pratt DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

INDEX OF SHEETS

- 1. COVER SHEET
- 2. INDEX OF SHEETS, HIGHWAY STANDARDS, PERTINENT INFORMATION, GENERAL NOTES, & COMMITMENTS
- 3. SUMMARY OF QUANTITIES
- 4. TYPICAL SECTIONS
- 5-15. SCHEDULES OF QUANTITIES
- 16. LOCATION MAP

HIGHWAY STANDARDS

000001-08	STANDARD SYMBOLS, ABBREVIATIONS, AND PATTERNS
001001-02	AREAS OF REINFORCEMENT BARS
001006	DECIMAL OF AN INCH AND OF A FOOT
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
701401-13	LANE CLOSURE, FREEWAY/EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701411-09	LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS ≥ 45 MPH
701426-09	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPER., FOR SPEEDS ≥ 45 MPH
701428-01	TRAFFIC CONTROL SETUP AND REMOVAL FREEWAY/EXPRESSWAY
701901-10	TRAFFIC CONTROL DEVICES
780001-05	TYPICAL PAVEMENT MARKINGS
781001-04	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS

PERTINENT INFORMATION

THE CONTRACTOR SHALL BE AWARE THAT THE FOLLOWING PROJECT(S) WITHIN OR ADJACENT TO THE LIMITS OF THIS CONTRACT SECTION MAY BE UNDER CONSTRUCTION DURING CONSTRUCTION OPERATIONS FOR THIS CONTRACT:

- CONTRACT NO: 78604, ROUTE I-064 (I-64), SECTION (41-6, 41-6-1, 41-7)RS-2; BSMART 2023, JEFFERSON COUNTY

GENERAL NOTES

- 1. THE UTILITIES KNOWN TO HAVE FACILITIES WITHIN THE PROJECT AREA ARE AS FOLLOWS:
 - AMEREN ILLINOIS
 - AT&T ILLINOIS
 - CHARTER COMMUNICATIONS, INC.
 - CLEARWAVE FIBER LLC
 - COUNTRYMARK COOPERATIVE, LLP
 - FRONTIER COMMUNICATIONS
 - KINDER MORGAN
 - VILLAGE OF RICHVIEW
 - TRI-COUNTY ELECTRIC COOPERATIVE, INC.
 - WASHINGTON COUNTY WATER CO.
- 2. NO SURVEY WAS PERFORMED FOR THIS PROJECT AND THE PLANS WERE CREATED USING MICROFILM AND FIELD MEASUREMENTS.
- 3. OVERNIGHT LANE CLOSURES WILL BE PERMITTED ONLY WHEN PERFORMING NIGHTTIME WORK.
- 4. THE RESIDENT ENGINEER SHALL VERIFY THE EXISTENCE OF HIGHWAY LIGHTING, INTELLIGENT TRANSPORTATION SYSTEMS (I.T.S.) UTILITIES, AND/OR ELECTRICAL CABLES ASSOCIATED WITH TRAFFIC SIGNALS WITHIN THE PROJECT LIMITS. IF ANY OF THESE EXIST WITHIN THE PROJECT LIMITS, AND IF THESE ITEMS REQUIRE LOCATING, THE CONTRACTOR SHALL BE DIRECTED TO DO SO ACCORDING TO SECTION 803 OF THE STANDARD SPECIFICATIONS. THIS WORK SHALL BE PAID FOR ACCORDING TO ARICLE 109.04 OF THE STANDARD SPECIFICATIONS.
- 5. FOUR CHANGEABLE MESSAGE SIGNS SHALL BE REQUIRED FOR THIS PROJECT. THEY SHALL BE PLACED AT THE BEGINNING OF THE PROJECT, ALONG US 51 ON THE NORTHBOUND AND SOUTHBOUND APPROACH TO THE I-64 INTERCHANGE, AND AT THE END OF THE PROJECT TWO WEEKS PRIOR TO ANY LANE CLOSURE. THEY SHALL REMAIN UP FOR THE DURATION OF THE PROJECT.
- 6. THE INTENT OF THE PARTIAL DEPTH REMOVAL IS TO REMOVE THE HMA RESURFACING ONLY. THE UNDERLYING CONCRETE SHALL NOT BE DISTURBED.
- 7. THE FOLLOWING MIXTURE REQUIREMENTS ARE APPLICABLE FOR THIS PROJECT:

DESCRIPTION:	PAVEMENT PATCHING (CM) ON I-64 FROM 0.9 MI W OF CH 11 TO JEFFERSON COUNTY LINE	
MIXTURE USE	POLY SURFACE	BINDER
AC/PG	SBS PG 70-28	PG 64-22
DESIGN AIR VOIDS	4.0% @ Ndes=90	4.0% @ Ndes=90
MIX COMPOSITION (Gradation)	IL 9.5	IL 19.0
FRICTION AGG	MIXTURE "E"	MIXTURE "B"
QUALITY MGMT PROGRAM	QC/QA	QC/QA
MatTranDev Required?	NO	NO

PLAN QUANTITIES FOR HOT-MIX ASPHALT ITEMS ARE CALCULATED USING A UNIT WEIGHT OF 112 LBS/SQ YD/IN

COMMITMENTS

NONE

MODEL: General Note [Sheet]
FILE NAME: c:\p\p_work\p\wid\slmam\1042651\0876\129-shit-genote.dgn

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	INDEX OF SHEETS, HIGHWAY STANDARDS, PERTINENT INFORMATION, GENERAL NOTES, & COMMITMENTS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -			064	95-(5.6)PP-3	WASHINGTON	16	2
		CHECKED -	REVISED -			CONTRACT NO. 76U29				
	PLOT DATE = 11/18/2024	DATE -	REVISED -			SCALE:	SHEET 1 OF 1 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT

MODEL: SOQ-1 [Sheet]
FILE NAME: c:\p\work\pwt\td\slmam\1042651\0876\29-sh1-SOQ.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTR. CODE
				100% STATE
				ROADWAY
				0006
				RURAL
45100200	CRACK FILLING	POUND	20090	20090
67100100	MOBILIZATION	L SUM	1	1
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	4	4
70100700	TRAFFIC CONTROL AND PROTECTION, STANDARD 701406	L SUM	1	1
70100800	TRAFFIC CONTROL AND PROTECTION, STANDARD 701401	L SUM	1	1
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	336	336
70300100	SHORT TERM PAVEMENT MARKING	FOOT	6380	6380
70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SQ FT	2127	2127
78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	52840	52840
* 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	464	464
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	464	464
X4406240	PARTIAL DEPTH REMOVAL, TYPE II, 4"	SQ YD	2594	2594
X4406440	PARTIAL DEPTH REMOVAL, TYPE III, 4"	SQ YD	5140	5140
X4406640	PARTIAL DEPTH REMOVAL, TYPE IV, 4"	SQ YD	32280	32280

* SPECIALTY ITEM





CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTR. CODE
				100% STATE
				ROADWAY
				0006
				RURAL
Ø Z0076604	TRAINEES TRAINING PROGRAM GRADUATE	HOUR	1000	1000
X4421000	PARTIAL DEPTH PATCHING	TON	8963	8963

Ø 0042

REV - MS

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES			F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					064	95-(5.6)PP-3	WASHINGTON	16	3
		CHECKED -	REVISED -					CONTRACT NO. 76U29				
	PLOT DATE = 12/3/2024	DATE -	REVISED -		SCALE:	SHEET 1	OF 1	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

MODEL: typical sections [Sheet]
FILE NAME: c:\p\work\p\road\simam\10426510876U29-shr-typical.dgn

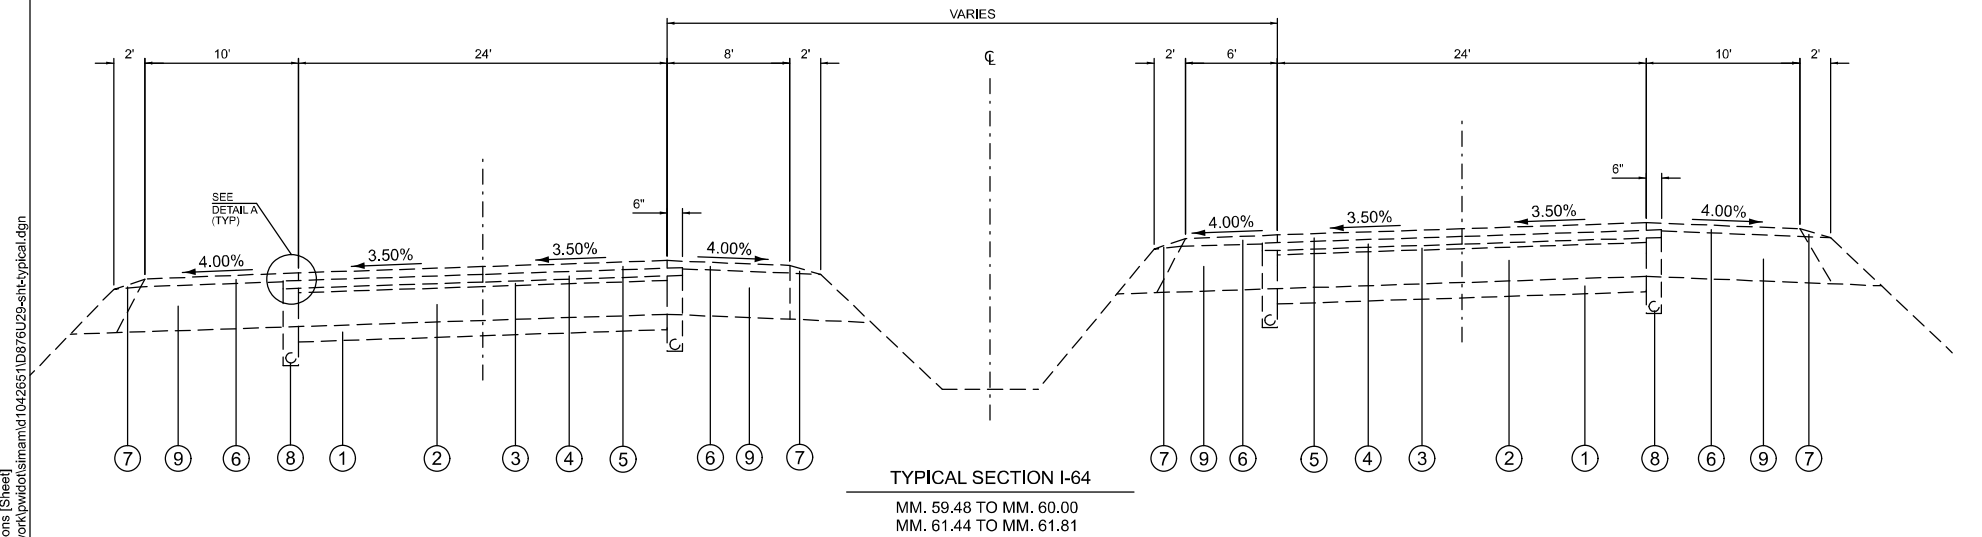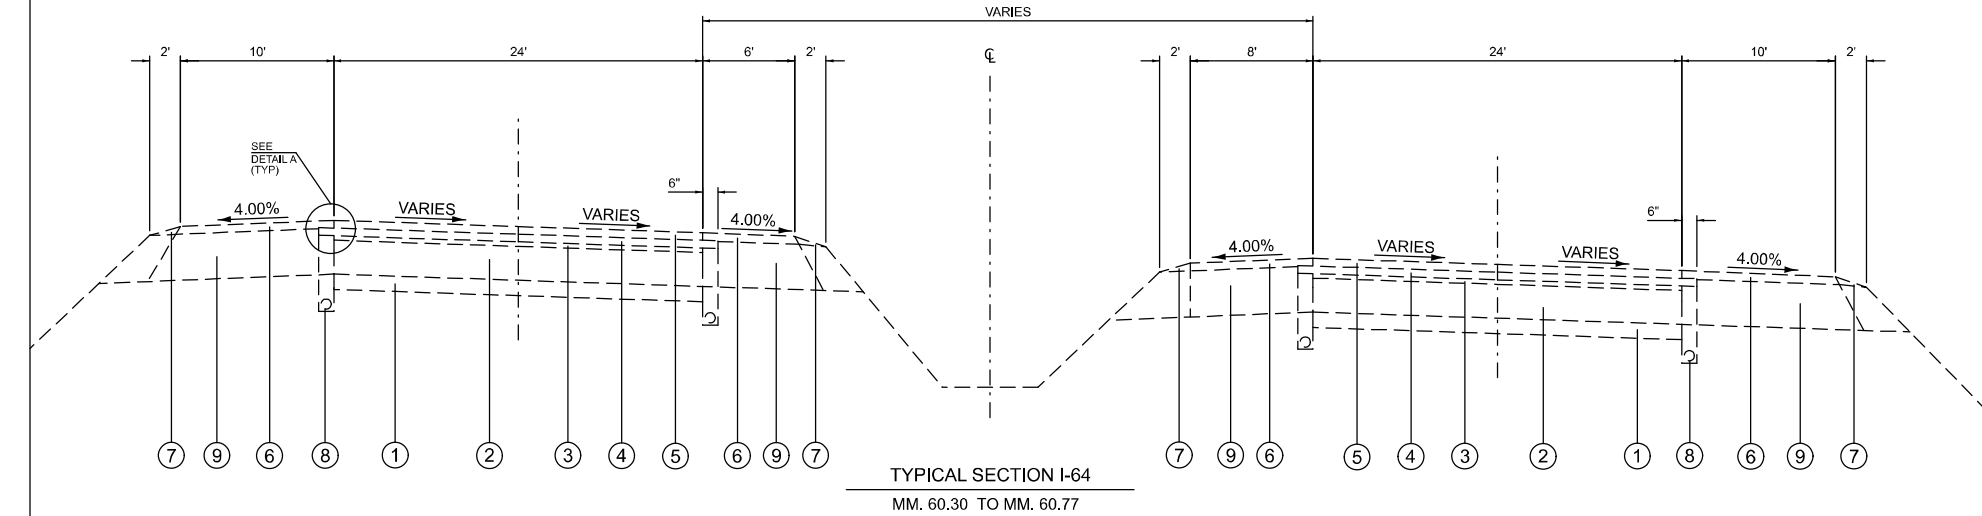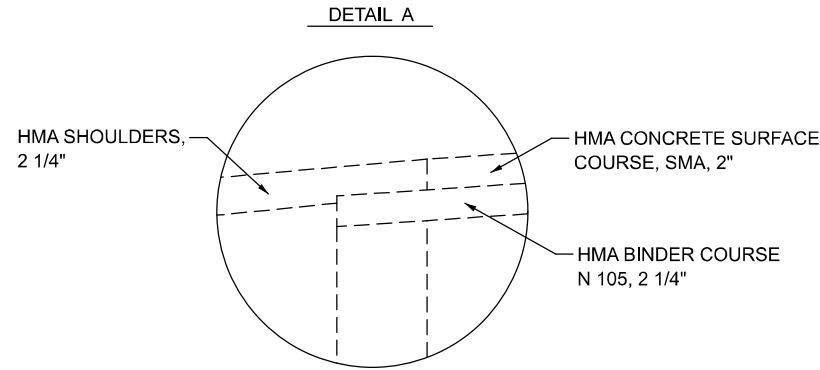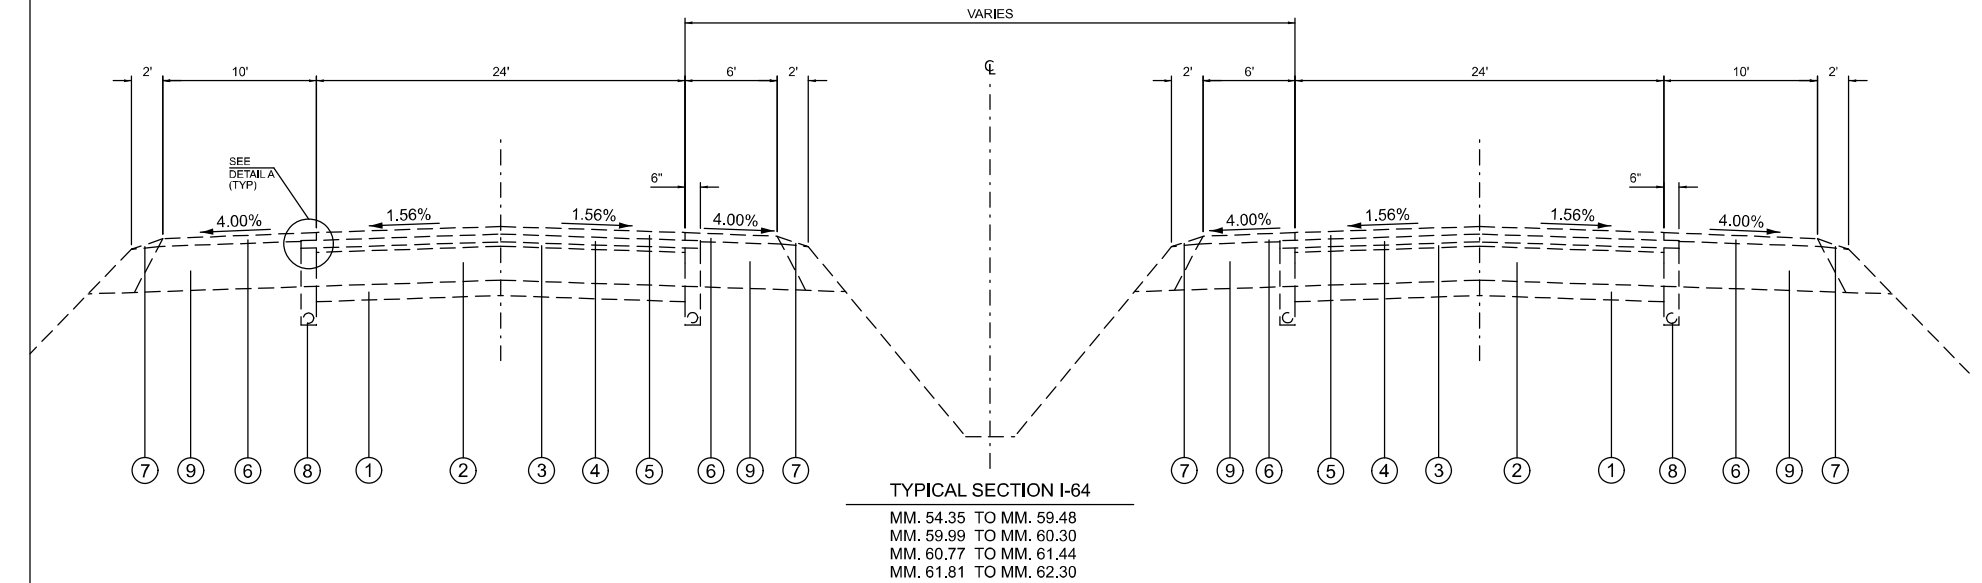

LEGEND

- ① EXISTING STABILIZED SUB-BASE, 4"
- ② EXISTING CONT. REINFORCED P.C.C. PAVEMENT, 8"
- ③ EXISTING BITUMINOUS RESURFACING, 1 1/4"
- ④ EXISTING HOT-MIX ASPHALT BINDER COURSE, 2 1/4"
- ⑤ EXISTING HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, 2"
- ⑥ EXISTING HOT-MIX ASPHALT SHOULDERS, 2 1/4"
- ⑦ EXISTING AGGREGATE WEDGE SHOULDERS, TYPE B
- ⑧ PIPE UNDERDRAIN, 4"
- ⑨ EXISTING STABILIZED SHOULDERS, 11 1/4"

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 11/15/2024	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
064	95-(5.6)PP-3	WASHINGTON	16	4
CONTRACT NO.76U29				
ILLINOIS FED. AID PROJECT				

MODEL: Schedule [Sheet]
FILE NAME: c:\paw_work\paw\td\slm\m\1042651\0876\29-sh1-schedule.dgn

PARTIAL DEPTH PATCHING SCHEDULE (1 OF 5)										
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	PARTIAL DEPTH REMOVAL (4")						
				LENGTH	WIDTH	CRACK FILLING	TYPE II	TYPE III	TYPE IV	PARTIAL DEPTH PATCHING
				FOOT	FOOT	POUND	SQ YD	SQ YD	SQ YD	TON
1	54.5	EB	CL	80	3	21	27			5.97
2	54.7	EB	CL	580	3	146			193	43.31
3	55	EB	CL	800	3	201			267	59.73
4	55.3	EB	CL	1480	3	371			493	110.51
5	55.8	EB	CL	360	3	91			120	26.88
6	56	EB	CL	80	3	21	27			5.97
7	56.1	EB	CL	440	3	111			147	32.85
8	56.2	EB	CL	360	3	91			120	26.88
9	56.3	EB	CL	160	6	42			107	23.89
10	56.4	EB	CL	400	3	101			133	29.87
11	56.5	EB	CL	60	3	16	20			4.48
12	56.5	EB	CL	120	3	31	40			8.96
13	56.6	EB	CL	120	3	31	40			8.96
14	56.7	EB	CL	40	3	11	13			2.99
15	57	EB	CL	280	3	71		93		20.91
16	57.2	EB	CL	240	3	61		80		17.92
17	57.5	EB	CL	960	3	241			320	71.68
18	57.7	EB	CL	40	3	11	13			2.99
19	58	EB	CL	80	3	21	27			5.97
20	58.3	EB	CL	280	3	71		93		20.91
21	58.3	EB	CL	60	3	16	20			4.48
22	58.6	EB	CL	320	3	81			107	23.89
23	58.6	EB	CL	160	3	41		53		11.95
24	58.7	EB	CL	200	3	51		67		14.93
25	58.9	EB	CL	360	3	91			120	26.88
26	59	EB	CL	920	3	231			307	68.69
27	59.4	EB	CL	320	3	81			107	23.89
28	60.3	EB	CL	50	3	14	17			3.73
29	60.4	EB	CL	120	3	31	40			8.96
30	60.8	EB	CL	140	3	36	47			10.45
31	61	EB	CL	280	3	71		93		20.91
32	61.1	EB	CL	240	3	61		80		17.92
33	61.2	EB	CL	240	3	61		80		17.92
34	61.6	EB	CL	200	3	51		67		14.93
35	61.7	EB	CL	100	3	26	33			7.47
36	62	EB	CL	100	3	26	33			7.47
37	62	WB	CL	600	3	151	0		200	44.80
38	61.8	WB	CL	80	3	21	27			5.97
39	61.6	WB	CL	100	3	26	33			7.47
40	61.5	WB	CL	420	3	106			140	31.36
41	61.3	WB	CL	640	3	161			213	47.79
42	61	WB	CL	160	3	41		53		11.95
43	60.9	WB	CL	100	3	26	33			7.47
44	60.3	WB	CL	400	3	101			133	29.87
45	60	WB	CL	120	3	31	40			8.96
46	59.8	WB	CL	160	3	41		53		11.95
47	59.3	WB	CL	1240	3	311			413	92.59
48	58.2	WB	CL	160	3	41		53		11.95
49	57.9	WB	CL	260	3	66		87		19.41
50	57.8	WB	CL	240	3	61		80		17.92
51	57.5	WB	CL	200	3	51		67		14.93
52	57.5	WB	CL	180	3	46		60		13.44
53	57.8	WB	CL	120	3	31	40			8.96
54	56.5	WB	CL	80	3	21	27			5.97
55	56.4	WB	CL	80	3	21	27			5.97
56	56.3	WB	CL	160	3	41		53		11.95
57	55	WB	CL	400	3	101			133	29.87
58	54.5	WB	CL	440	3	111			147	32.85
				LAYOUT QTY		4337	623	1213	3920	1289.49
				20% CONTINGENCY		867	125	243	784	257.90
				TOTAL QTY(1 OF 5)		5204	748	1456	4704	1547.4

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 12/3/2024	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES OF QUANTITIES

SCALE: SHEET 1 OF 11 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
064	95-(5,6)PP-3	WASHINGTON	16	5
		CONTRACT NO. 76U29		
		ILLINOIS	FED. AID PROJECT	

MODEL: Schedule-1 [Sheet]
FILE NAME: c:\p\w\work\pwrtd\slm\m\1042651\0876\29-shr-schedule.dgn

PARTIAL DEPTH PATCHING SCHEDULE (2 OF 5)										
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/PASSING LANE	PARTIAL DEPTH REMOVAL (4")						PARTIAL DEPTH PATCHING
				LENGTH	WIDTH	CRACK FILLING	TYPE II	TYPE III	TYPE IV	
				FOOT	FOOT	POUND	SQ FT	SQ FT	SQ FT	TON
59	54.3	EB	DL	50	6	14	33			7.47
60	54.3	EB	DL	350	6	89			233	52.27
61	54.4	EB	DL	120	6	32		80		17.92
62	54.5	EB	DL	260	6	67			173	38.83
63	54.5	EB	DL	260	6	67			173	38.83
64	54.6	EB	DL	320	6	82			213	47.79
65	54.6	EB	DL	200	6	52			133	29.87
66	54.6	EB	DL	200	6	52			133	29.87
67	54.7	EB	DL	200	6	52			133	29.87
68	54.9	EB	DL	40	6	12	27			5.97
69	54.9	EB	DL	60	6	17	40			8.96
70	55	EB	DL	280	6	72			187	41.81
71	55.1	EB	DL	560	6	142			373	83.63
72	55.3	EB	DL	120	6	32		80		17.92
73	55.4	EB	DL	100	6	27		67		14.93
74	55.5	EB	DL	250	6	64			167	37.33
75	55.6	EB	DL	120	3	31	40			8.96
76	55.6	EB	DL	160	3	41		53		11.95
77	55.8	EB	DL	280	3	71		93		20.91
78	55.9	EB	DL	60	3	16	20			4.48
79	55.9	EB	DL	200	3	51	0	67		14.93
80	56	EB	DL	40	6	12	27			5.97
81	56	EB	DL	40	6	12	27			5.97
82	56	EB	DL	100	3	26	33			7.47
83	56.1	EB	DL	160	6	42			107	23.89
84	56.1	EB	DL	160	6	42			107	23.89
85	56.1	EB	DL	100	3	26	33			7.47
86	56.2	EB	DL	200	3	51		67		14.93
87	56.4	EB	DL	560	6	142			373	83.63
88	56.4	EB	DL	560	6	142			373	83.63
89	56.5	EB	DL	220	3	56		73		16.43
90	56.6	EB	DL	360	6	92			240	53.76
91	56.6	EB	DL	360	3	91			120	26.88
92	56.7	EB	DL	160	3	41		53		11.95
93	56.7	EB	DL	60	6	17	40			8.96
94	56.8	EB	DL	60	3	16	20			4.48
95	57.2	EB	DL	720	6	182			480	107.52
96	57.4	EB	DL	720	6	182			480	107.52
97	57.6	EB	DL	360	6	92			240	53.76
98	57.7	EB	DL	80	6	22		53		11.95
99	57.8	EB	DL	200	3	51		67		14.93
100	58.1	EB	DL	200	3	51		67		14.93
101	58.3	EB	DL	60	6	17	40	0		8.96
102	58.3	EB	DL	100	6	27		67		14.93
103	58.4	EB	DL	160	6	42		0	107	23.89
				LAYOUT QTY		2557	380	887	4547	1302.19
				20% CONTINGENCY		511	76	177	909	260.44
				TOTAL QTY (2 OF 5)		3068	456	1064	5456	1562.6

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULES OF QUANTITIES			F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					064	95-(5,6)PP-3	WASHINGTON	16	6
		CHECKED -	REVISED -					CONTRACT NO.76U29				
	PLOT DATE = 11/19/2024	DATE -	REVISED -		SCALE:	SHEET 2	OF 11	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

MODEL: Schedule-2 (Sheet)
FILE NAME: c:\p\work\pwrtd\slrnam\10426510876U29-shit-schedule.dgn

PARTIAL DEPTH PATCHING SCHEDULE (3 OF 5)										
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	PARTIAL DEPTH REMOVAL (4")						
				LENGTH	WIDTH	CRACK FILLING	TYPE II	TYPE III	TYPE IV	PARTIAL DEPTH PATCHING
				FOOT	FOOT	POUND	SQ FT	SQ FT	SQ FT	TON
104	58.4	EB	DL	520	3	131			173	38.83
105	58.6	EB	DL	100	6	27		67		14.93
106	58.6	EB	DL	240	6	62			160	35.84
107	58.7	EB	DL	720	6	182			480	107.52
108	58.9	EB	DL	100	3	26	33			7.47
109	59	EB	DL	240	6	62			160	35.84
110	59.8	EB	DL	75	6	21		50		11.20
111	59.8	EB	DL	75	3	20	25			5.60
112	59.9	EB	DL	1160	6	292			773	173.23
113	60.2	EB	DL	240	6	62			160	35.84
114	60.4	EB	DL	300	3	76			100	22.40
115	60.5	EB/EXIT RAMP	DL	100	6	27		67		14.93
116	60.5	EB/EXIT RAMP	DL	240	3	61		80		17.92
117	60.6	EB	DL	100	3	26	33			7.47
118	60.6	EB	DL	100	3	26	33			7.47
119	61	EB/ON RAMP		100	3	26	33			7.47
120	61	EB/ON RAMP		100	3	26	33			7.47
121	61.1	EB/ON RAMP		60	3	16	20			4.48
122	61.1	EB	DL	60	3	16	20			4.48
123	61.4	EB	DL	400	6	102			267	59.73
124	62	WB	DL	520	6	132			347	77.65
125	62	WB	DL	520	3	131			173	38.83
126	62	WB	DL	100	3	26	33			7.47
127	61.9	WB	DL	80	6	22		53		11.95
128	61.9	WB	DL	80	3	21	27			5.97
129	61.9	WB	DL	120	6	32		80		17.92
130	61.9	WB	DL	120	3	31	40			8.96
131	61.9	WB	DL	800	6	202			533	119.47
132	61.9	WB	DL	800	3	201			267	59.73
133	61.8	WB	DL	160	6	42			107	23.89
134	61.8	WB	DL	160	3	41		53		11.95
135	61.6	WB	DL	60	6	17	40			8.96
136	61.6	WB	DL	440	6	112			293	65.71
137	61.6	WB	DL	440	3	111			147	32.85
138	61.5	WB	DL	720	3	181			240	53.76
139	61.3	WB	DL	160	6	42			107	23.89
140	61.3	WB	DL	160	6	42			107	23.89
141	61.3	WB	DL	80	3	21	27			5.97
141	61.3	WB	DL	80	3	21	27			5.97
142	61.8	WB	DL	880	6	222			587	131.41
143	61.8	WB	DL	880	6	222			587	131.41
144	61	WB	DL	840	3	211			280	62.72
145	61	WB	DL	840	6	212			560	125.44
146	60.8	WB	DL	280	3	71		93		20.91
147	60.7	WB	DL	100	3	26	33	0		7.47
148	60.8	WB	DL	120	6	32		80		17.92
149	60.5	WB	DL	160	6	42			107	23.89
150	60.5	WB	DL	160	6	42			107	23.89
151	60.5	WB	DL	160	3	41		53		11.95
152	60.4	WB	DL	2000	6	502			1333	298.67
153	60.4	WB	DL	2000	6	502			1333	298.67
				LAYOUT QTY		4840	458	677	9487	2379.25
				20% CONTINGENCY		968	92	135	1897	475.85
				TOTAL QTY (3 OF 5)		5808	550	812	11384	2855.1

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 12/3/2024	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES OF QUANTITIES

SCALE: SHEET 3 OF 11 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
064	95-(5,6)PP-3	WASHINGTON	16	7
CONTRACT NO.76U29				
ILLINOIS FED. AID PROJECT				

MODEL: Schedule-3 [Sheet]
FILE NAME: c:\p\w\work\pwrtd\slmam\10426510876U29-shr-schedule.dgn

PARTIAL DEPTH PATCHING SCHEDULE (4 OF 5)										
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	PARTIAL DEPTH REMOVAL (4")						
				LENGTH	WIDTH	CRACK FILLING	TYPE II	TYPE III	TYPE IV	PARTIAL DEPTH PATCHING
				FOOT	FOOT	POUND	SQ YD	SQ YD	SQ YD	TON
154	60.1	WB	DL	200	6	52			133	29.87
155	60.1	WB	DL	200	6	52			133	29.87
156	60	WB	DL	320	6	82			213	47.79
157	60	WB	DL	280	6	72			187	41.81
158	59.8	WB	DL	120	6	32		80		17.92
159	59.8	WB	DL	160	6	42			107	23.89
160	59.7	WB	DL	400	6	102			267	59.73
161	59.7	WB	DL	120	6	32		80		17.92
162	59.7	WB	DL	80	6	22		53		11.95
163	59.6	WB	DL	80	6	22		53		11.95
164	59.6	WB	DL	720	6	182			480	107.52
165	59.4	WB	DL	1200	6	302			800	179.20
166	59.2	WB	DL	40	6	12	27			5.97
167	59.1	WB	DL	80	6	22		53		11.95
168	59	WB	DL	160	6	42			107	23.89
169	58.9	WB	DL	600	6	152			400	89.60
170	58.7	WB	DL	1880	6	472			1253	280.75
171	58.4	WB	DL	200	3	51		67		14.93
172	58.4	WB	DL	360	6	92			240	53.76
173	58.3	WB	DL	400	6	102			267	59.73
174	58.1	WB	DL	240	6	62			160	35.84
175	58	WB	DL	400	6	102			267	59.73
176	58	WB	DL	160	3	41		53		11.95
177	57.9	WB	DL	100	6	27		67		14.93
178	57.8	WB	DL	640	6	162			427	95.57
179	57.7	WB	DL	1520	6	382			1013	226.99
180	57.3	WB	DL	160	3	41		53		11.95
181	57.2	WB	DL	80	3	21	27			5.97
182	57.1	WB	DL	720	6	182			480	107.52
183	57	WB	DL	280	6	72			187	41.81
184	56.9	WB	DL	480	6	122			320	71.68
185	56.7	WB	DL	280	3	71		93		20.91
186	56.7	WB	DL	200	6	52			133	29.87
187	56.6	WB	DL	160	6	42			107	23.89
188	56.5	WB	DL	280	3	71		93		20.91
189	56.5	WB	DL	400	6	102			267	59.73
190	56.4	WB	DL	80	3	21	27			5.97
191	55.9	WB	DL	40	3	11	13			2.99
192	55.7	WB	DL	120	6	32		80		17.92
193	55.2	WB	DL	200	3	51		67		14.93
194	54.8	WB	DL	280	6	72			187	41.81
195	54.4	WB	DL	40	6	12	27			5.97
				LAYOUT QTY		3690	120	893	8133	2048.85
				20% CONTINGENCY		738	24	179	1627	409.77
				TOTAL QTY (4 OF 5)		4428	144	1072	9760	2458.6

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	USER NAME = Meseret.sima		DESIGNED -	REVISED -	SCHEDULES OF QUANTITIES				F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	DRAWN -		REVISIED -						064	95-(5,6)PP-3	WASHINGTON	16	8
	CHECKED -		REVISED -		SCALE: SHEET 4 OF 11 SHEETS STA. TO STA.				CONTRACT NO.76U29				
	PLOT DATE = 12/3/2024		DATE -	REVISED -					ILLINOIS FED. AID PROJECT				

MODEL: Schedule-4 (Sheet)
FILE NAME: c:\pw_work\pwlslam\cd1042651\0876\29-shr-schedule.dgn

PARTIAL DEPTH PATCHING SCHEDULE (5 OF 5)										
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	LENGTH	WIDTH	CRACK FILLING	PARTIAL DEPTH REMOVAL (4")			PARTIAL DEPTH PATCHING
							TYPE II	TYPE III	TYPE IV	
				FOOT	FOOT	POUND	SQ YD	SQ YD	SQ YD	TON
196	55.6	EB	PL	160	3	41		53		11.95
197	56.8	EB	PL	160	3	41		53		11.95
198	57	EB	PL	400	3	101			133	29.87
199	60.6	EB	PL	200	3	51		67		14.93
200	61.1	EB	PL	240	3	61		80		17.92
201	61.3	EB	PL	80	3	21	27			5.97
202	61.5	EB	PL	80	6	22		53		11.95
203	61.9	EB	PL	60	3	16	20			4.48
204	62	WB	PL	40	3	11	13			2.99
205	61.9	WB	PL	40	3	11	13			2.99
206	61.9	WB	PL	160	6	42			107	23.89
207	61.7	WB	PL	80	3	21	27			5.97
208	61.4	WB	PL	80	6	22		53		11.95
209	61	WB	PL	120	6	32		80		17.92
210	61	WB	PL	120	6	32		80		17.92
211	60.9	WB	PL	120	3	31	40			8.96
212	60.8	WB	PL	40	6	12	27			5.97
213	60.8	WB	PL	40	6	12	27			5.97
214	60.8	WB	PL	360	3	91			120	26.88
215	60.2	WB	PL	60	6	17	40			8.96
216	60.2	WB	PL	60	6	17	40			8.96
217	60	WB	PL	40	3	11	13			2.99
218	60	WB	PL	40	3	11	13			2.99
219	59.9	WB	PL	40	3	11	13			2.99
220	59.8	WB	PL	40	6	12	27			5.97
221	59.6	WB	PL	40	3	11	13			2.99
222	58.7	WB	PL	40	6	12	27			5.97
223	58.3	WB	PL	600	3	151			200	44.80
224	57.5	WB	PL	40	3	11	13			2.99
225	57.5	WB	PL	40	6	12	27			5.97
226	57.1	WB	PL	40	6	12	27			5.97
227	56.6	WB	PL	40	6	12	27			5.97
228	56.4	WB	PL	120	3	31	40			8.96
229	56.3	WB	PL	40	3	11	13			2.99
230	56	WB	PL	80	3	21	27			5.97
231	55.8	WB	PL	80	3	21	27			5.97
232	55.6	WB	PL	280	3	71		93		20.91
233	55.5	WB	PL	360	3	91			120	26.88
234	55.3	WB	PL	400	3	101			133	29.87
				LAYOUT QTY		1318	580	613	813	449.49
				20% CONTINGENCY		264	116	123	163	89.90
				TOTAL QTY (5 OF 5)		1582	696	736	976	539.4

GRAND TOTAL	CRACK FILLING	PARTIAL DEPTH REMOVAL (4")			PARTIAL DEPTH PATCHING
		TYPE II	TYPE III	TYPE IV	
TOTAL QTY OF (1 OF 5 TO 5 OF 5)	POUND	SQ YD	SQ YD	SQ YD	TON
	20090	2594	5140	32280	8963

REV - MS

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULES OF QUANTITIES			F A I RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					064	95-(5,6)PP-3	WASHINGTON	16	9
		CHECKED -	REVISED -		SCALE: SHEET 5 OF 11 SHEETS STA. TO STA.			CONTRACT NO.76U29				
	PLOT DATE = 12/3/2024	DATE -	REVISED -					ILLINOIS FED. AID PROJECT				

MODEL: Schedule-5 (Sheet)
FILE NAME: c:\p\work\pilot\simam\1042651\0876\29-shit-schedule.dgn

PAVEMENT MARKING SCHEDULE (2 OF 5)									
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	LENGTH	SHORT TERM PAVEMENT MARKING	SHORT TERM PAVEMENT MARKING REMOVAL	THERMOPLASTIC PAVEMENT MARKING-6"	RAISED REFLECTIVE PAVEMENT MARKERS	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL
					SKIP DASH WHITE		WHITE SOLID EDGE LINE	CRYSTAL	
				(FOOT)	(FOOT)	(SQ FT)	FOOT	(EACH)	(EACH)
59	54.3	EB	DL	50	8	2.67	50		
60	54.3	EB	DL	350	32	10.67	350		
61	54.4	EB	DL	120	12	4.00	120		
62	54.5	EB	DL	260	24	8.00	260		
63	54.5	EB	DL	260	24	8.00	260		
64	54.6	EB	DL	320	32	10.67	320		
65	54.6	EB	DL	200	20	6.67	200		
66	54.6	EB	DL	200	20	6.67	200		
67	54.7	EB	DL	200	20	6.67	200		
68	54.9	EB	DL	40	4	1.33	40		
69	54.9	EB	DL	60	8	2.67	60		
70	55	EB	DL	280	28	9.33	280		
71	55.1	EB	DL	560	52	17.33	560		
72	55.3	EB	DL	120	12	4.00	120		
73	55.4	EB	DL	100	12	4.00	100		
74	55.5	EB	DL	250	24	8.00	250		
75	55.6	EB	DL	120	12	4.00	120		
76	55.6	EB	DL	160	16	5.33	160		
77	55.8	EB	DL	280	28	9.33	280		
78	55.9	EB	DL	60	8	2.67	60		
79	55.9	EB	DL	200	20	6.67	200		
80	56	EB	DL	40	4	1.33	40		
81	56	EB	DL	40	4	1.33	40		
82	56	EB	DL	100	12	4.00	100		
83	56.1	EB	DL	160	16	5.33	160		
84	56.1	EB	DL	160	16	5.33	160		
85	56.1	EB	DL	100	12	4.00	100		
86	56.2	EB	DL	200	20	6.67	200		
87	56.4	EB	DL	560	52	17.33	560		
88	56.4	EB	DL	560	52	17.33	560		
89	56.5	EB	DL	220	20	6.67	220		
90	56.6	EB	DL	360	36	12.00	360		
91	56.6	EB	DL	360	36	12.00	360		
92	56.7	EB	DL	160	16	5.33	160		
93	56.7	EB	DL	60	8	2.67	60		
94	56.8	EB	DL	60	8	2.67	60		
95	57.2	EB	DL	720	68	22.67	720		
96	57.4	EB	DL	720	68	22.67	720		
97	57.6	EB	DL	360	36	12.00	360		
98	57.7	EB	DL	80	8	2.67	80		
99	57.8	EB	DL	200	20	6.67	200		
100	58.1	EB	DL	200	20	6.67	200		
101	58.3	EB	DL	60	8	2.67	60		
102	58.3	EB	DL	100	12	4.00	100		
103	58.4	EB	DL	160	16	5.33	160		
			SUBTOTAL (2 OF 5)		984	328.00	9930	0	0

PLOT DATE = 11/19/2024	USER NAME = Meseret.sima	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
	DATE -		REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES OF QUANTITIES

SCALE: SHEET 7 OF 11 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
064	95-(5,6)PP-3	WASHINGTON	167	11
CONTRACT NO.76U29				
ILLINOIS FED. AID PROJECT				

MODEL: Schedule-7 (Sheet)
FILE NAME: c:\p\work\pilot\slm\m\104265108\6\29-shit-schedule.dgn

PAVEMENT MARKING SCHEDULE (3 OF 5)									
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	LENGTH	SHORT TERM PAVEMENT MARKING	SHORT TERM PAVEMENT MARKING REMOVAL	THERMOPLASTIC PAVEMENT MARKING-6"	RAISED REFLECTIVE PAVEMENT MARKERS	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL
					SKIP DASH WHITE		WHITE SOLID EDGE LINE	CRYSTAL	
				(FOOT)	(FOOT)	(SQ FT)	FOOT	(EACH)	(EACH)
104	58.4	EB	DL	520	48	16.00	520		
105	58.6	EB	DL	100	12	4.00	100		
106	58.6	EB	DL	240	24	8.00	240		
107	58.7	EB	DL	720	68	22.67	720		
108	58.9	EB	DL	100	12	4.00	100		
109	59	EB	DL	240	24	8.00	240		
110	59.8	EB	DL	75	8	2.67	75		
111	59.8	EB	DL	75	8	2.67	75		
112	59.9	EB	DL	1160	108	36.00	1160		
113	60.2	EB	DL	240	24	8.00	240		
114	60.4	EB	DL	300	28	9.33	300		
115	60.5	EB/EXIT RAMP	DL	100	12	4.00	100		
116	60.5	EB/EXIT RAMP	DL	240	24	8.00	240		
117	60.6	EB	DL	100	12	4.00	100		
118	60.6	EB	DL	100	12	4.00	100		
119	61	EB/ON RAMP		100	12	4.00	100		
120	61	EB/ON RAMP		100	12	4.00	100		
121	61.1	EB/ON RAMP		60	8	2.67	60		
122	61.1	EB	DL	60	8	2.67	60		
123	61.4	EB	DL	400	40	13.33	400		
124	62	WB	DL	520	48	16.00	520		
125	62	WB	DL	520	48	16.00	520		
126	62	WB	DL	100	12	4.00	100		
127	61.9	WB	DL	80	8	2.67	80		
128	61.9	WB	DL	80	8	2.67	80		
129	61.9	WB	DL	120	12	4.00	120		
130	61.9	WB	DL	120	12	4.00	120		
131	61.9	WB	DL	800	76	25.33	800		
132	61.9	WB	DL	800	76	25.33	800		
133	61.8	WB	DL	160	16	5.33	160		
134	61.8	WB	DL	160	16	5.33	160		
135	61.6	WB	DL	60	8	2.67	60		
136	61.6	WB	DL	440	40	13.33	440		
137	61.6	WB	DL	440	40	13.33	440		
138	61.5	WB	DL	720	68	22.67	720		
139	61.3	WB	DL	160	16	5.33	160		
140	61.3	WB	DL	160	16	5.33	160		
141	61.3	WB	DL	80	8	2.67	80		
141	61.3	WB	DL	80	8	2.67	80		
142	61.8	WB	DL	880	80	26.67	880		
143	61.8	WB	DL	880	80	26.67	880		
144	61	WB	DL	840	80	26.67	840		
145	61	WB	DL	840	80	26.67	840		
146	60.8	WB	DL	280	28	9.33	280		
147	60.7	WB	DL	100	12	4.00	100		
148	60.8	WB	DL	120	12	4.00	120		
149	60.5	WB	DL	160	16	5.33	160		
150	60.5	WB	DL	160	16	5.33	160		
151	60.5	WB	DL	160	16	5.33	160		
152	60.4	WB	DL	2000	184	61.33	2000		
153	60.4	WB	DL	2000	184	61.33	2000		
			SUBTOTAL (3 OF 5)		1828	609.33	19050	0	0

USER NAME = Meseret.sima	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 12/3/2024	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES OF QUANTITIES

SCALE: SHEET 8 OF 11 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
064	95-(5,6)PP-3	WASHINGTON	16	12
CONTRACT NO.76U29				
ILLINOIS FED. AID PROJECT				

MODEL: Schedule-8 [Sheet]

PAVEMENT MARKING SCHEDULE (4 OF 5)									
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/ PASSING LANE	LENGTH	SHORT TERM PAVEMENT MARKING	SHORT TERM PAVEMENT MARKING REMOVAL	THERMOPLASTIC PAVEMENT MARKING-6"	RAISED REFLECTIVE PAVEMENT MARKERS	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL
					SKIP DASH WHITE		WHITE SOLID EDGE LINE	CRYSTAL	
				(FOOT)	(FOOT)	(SQ FT)	FOOT	(EACH)	(EACH)
154	60.1	WB	DL	200	20	6.67	200		
155	60.1	WB	DL	200	20	6.67	200		
156	60	WB	DL	320	32	10.67	320		
157	60	WB	DL	280	28	9.33	280		
158	59.8	WB	DL	120	12	4.00	120		
159	59.8	WB	DL	160	16	5.33	160		
160	59.7	WB	DL	400	40	13.33	400		
161	59.7	WB	DL	120	12	4.00	120		
162	59.7	WB	DL	80	8	2.67	80		
163	59.6	WB	DL	80	8	2.67	80		
164	59.6	WB	DL	720	68	22.67	720		
165	59.4	WB	DL	1200	112	37.33	1200		
166	59.2	WB	DL	40	4	1.33	40		
167	59.1	WB	DL	80	8	2.67	80		
168	59	WB	DL	160	16	5.33	160		
169	58.9	WB	DL	600	56	18.67	600		
170	58.7	WB	DL	1880	172	57.33	1880		
171	58.4	WB	DL	200	20	6.67	200		
172	58.4	WB	DL	360	36	12.00	360		
173	58.3	WB	DL	400	40	13.33	400		
174	58.1	WB	DL	240	24	8.00	240		
175	58	WB	DL	400	40	13.33	400		
176	58	WB	DL	160	16	5.33	160		
177	57.9	WB	DL	100	12	4.00	100		
178	57.8	WB	DL	640	60	20.00	640		
179	57.7	WB	DL	1520	140	46.67	1520		
180	57.3	WB	DL	160	16	5.33	160		
181	57.2	WB	DL	80	8	2.67	80		
182	57.1	WB	DL	720	68	22.67	720		
183	57	WB	DL	280	28	9.33	280		
184	56.9	WB	DL	480	44	14.67	480		
185	56.7	WB	DL	280	28	9.33	280		
186	56.7	WB	DL	200	20	6.67	200		
187	56.6	WB	DL	160	16	5.33	160		
188	56.5	WB	DL	280	28	9.33	280		
189	56.5	WB	DL	400	40	13.33	400		
190	56.4	WB	DL	80	8	2.67	80		
191	55.9	WB	DL	40	4	1.33	40		
192	55.7	WB	DL	120	12	4.00	120		
193	55.2	WB	DL	200	20	6.67	200		
194	54.8	WB	DL	280	28	9.33	280		
195	54.4	WB	DL	40	4	1.33	40		
			SUBTOTAL (4 OF 5)		1392	464.00	14460	0	0

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULES OF QUANTITIES				F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						064	95-(5,6)PP-3	WASHINGTON	16	13
		CHECKED -	REVISED -						CONTRACT NO.76U29				
	PLOT DATE = 12/3/2024	DATE -	REVISED -						SCALE:	SHEET 9	OF 11 SHEETS	STA.	TO STA.
ILLINOIS FED. AID PROJECT													


MODEL: Schedule.d [Sheet]
FILE NAME: c:\p\work\pwtol\simam\1042651\0876\29-shrt-schedule.dgn

PAVEMENT MARKING SCHEDULE (5 OF 5)									
PARTIAL DEPTH PATCH #	MILE MARKER	EB / WB	CENTERLINE JOINT/ DRIVING LANE/PASSING LANE	LENGTH	SHORT TERM PAVEMENT MARKING	SHORT TERM PAVEMENT MARKING REMOVAL	THERMOPLASTIC PAVEMENT MARKING-6"	RAISED REFLECTIVE PAVEMENT MARKERS	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL
					SKIP DASH WHITE		YELLOW SOLID EDGE LINE	CRYSTAL	
				(FOOT)	(FOOT)	(SQ FT)	FOOT	(EACH)	(EACH)
196	55.6	EB	PL	160	16	5.33	160		
197	56.8	EB	PL	160	16	5.33	160		
198	57	EB	PL	400	40	13.33	400		
199	60.6	EB	PL	200	20	6.67	200		
200	61.1	EB	PL	240	24	8.00	240		
201	61.3	EB	PL	80	8	2.67	80		
202	61.5	EB	PL	80	8	2.67	80		
203	61.9	EB	PL	60	8	2.67	60		
204	62	WB	PL	40	4	1.33	40		
205	61.9	WB	PL	40	4	1.33	40		
206	61.9	WB	PL	160	16	5.33	160		
207	61.7	WB	PL	80	8	2.67	80		
208	61.4	WB	PL	80	8	2.67	80		
209	61	WB	PL	120	12	4.00	120		
210	61	WB	PL	120	12	4.00	120		
211	60.9	WB	PL	120	12	4.00	120		
212	60.8	WB	PL	40	4	1.33	40		
213	60.8	WB	PL	40	4	1.33	40		
214	60.8	WB	PL	360	36	12.00	360		
215	60.2	WB	PL	60	8	2.67	60		
216	60.2	WB	PL	60	8	2.67	60		
217	60	WB	PL	40	4	1.33	40		
218	60	WB	PL	40	4	1.33	40		
219	59.9	WB	PL	40	4	1.33	40		
220	59.8	WB	PL	40	4	1.33	40		
221	59.6	WB	PL	40	4	1.33	40		
222	58.7	WB	PL	40	4	1.33	40		
223	58.3	WB	PL	600	56	18.67	600		
224	57.5	WB	PL	40	4	1.33	40		
225	57.5	WB	PL	40	4	1.33	40		
226	57.1	WB	PL	40	4	1.33	40		
227	56.6	WB	PL	40	4	1.33	40		
228	56.4	WB	PL	120	12	4.00	120		
229	56.3	WB	PL	40	4	1.33	40		
230	56	WB	PL	80	8	2.67	80		
231	55.8	WB	PL	80	8	2.67	80		
232	55.6	WB	PL	280	28	9.33	280		
233	55.5	WB	PL	360	36	12.00	360		
234	55.3	WB	PL	400	40	13.33	400		
			SUBTOTAL (5 OF 5)		508	169.33	5060	0	0

	USER NAME = Meseret.sima	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULES OF QUANTITIES			F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					064	95-(5.6)PP-3	WASHINGTON	16	14
		CHECKED -	REVISED -					CONTRACT NO. 76U29				
	PLOT DATE = 11/19/2024	DATE -	REVISED -		SCALE:	SHEET 10	OF 11	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

MODEL: Schedule-10 [Sheet]
FILE NAME: c:\p\work\p\work\simam\1042651\0876\29-shit-schedule.dgn

TOTAL PAVEMENT MARKING SCHEDULE 1-5								
				SHORT TERM PAVEMENT MARKING	SHORT TERM PAVEMENT MARKING REMOVAL	THERMOPLASTIC PAVEMENT MARKING-6"	RAISED REFLECTIVE PAVEMENT MARKERS	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL
				SKIP DASH WHITE (FOOT)	(SQ FT)	SKIP DASH WHITE FOOT	CRYSTAL (EACH)	(EACH)
SUBTOTAL OF PAVEMENT MARKING SCHEDULE (1 OF 5)				1668	556.00	4340	464	464
SUBTOTAL OF PAVEMENT MARKING SCHEDULE (2 OF 5)				984	328.00	9930		
SUBTOTAL OF PAVEMENT MARKING SCHEDULE (3 OF 5)				1828	609.33	19050		
SUBTOTAL OF PAVEMENT MARKING SCHEDULE (4 OF 5)				1392	464.00	14460		
SUBTOTAL OF PAVEMENT MARKING SCHEDULE (5 OF 5)				508	169.33	5060		
TOTAL				6380	2126.67	52840	464	464

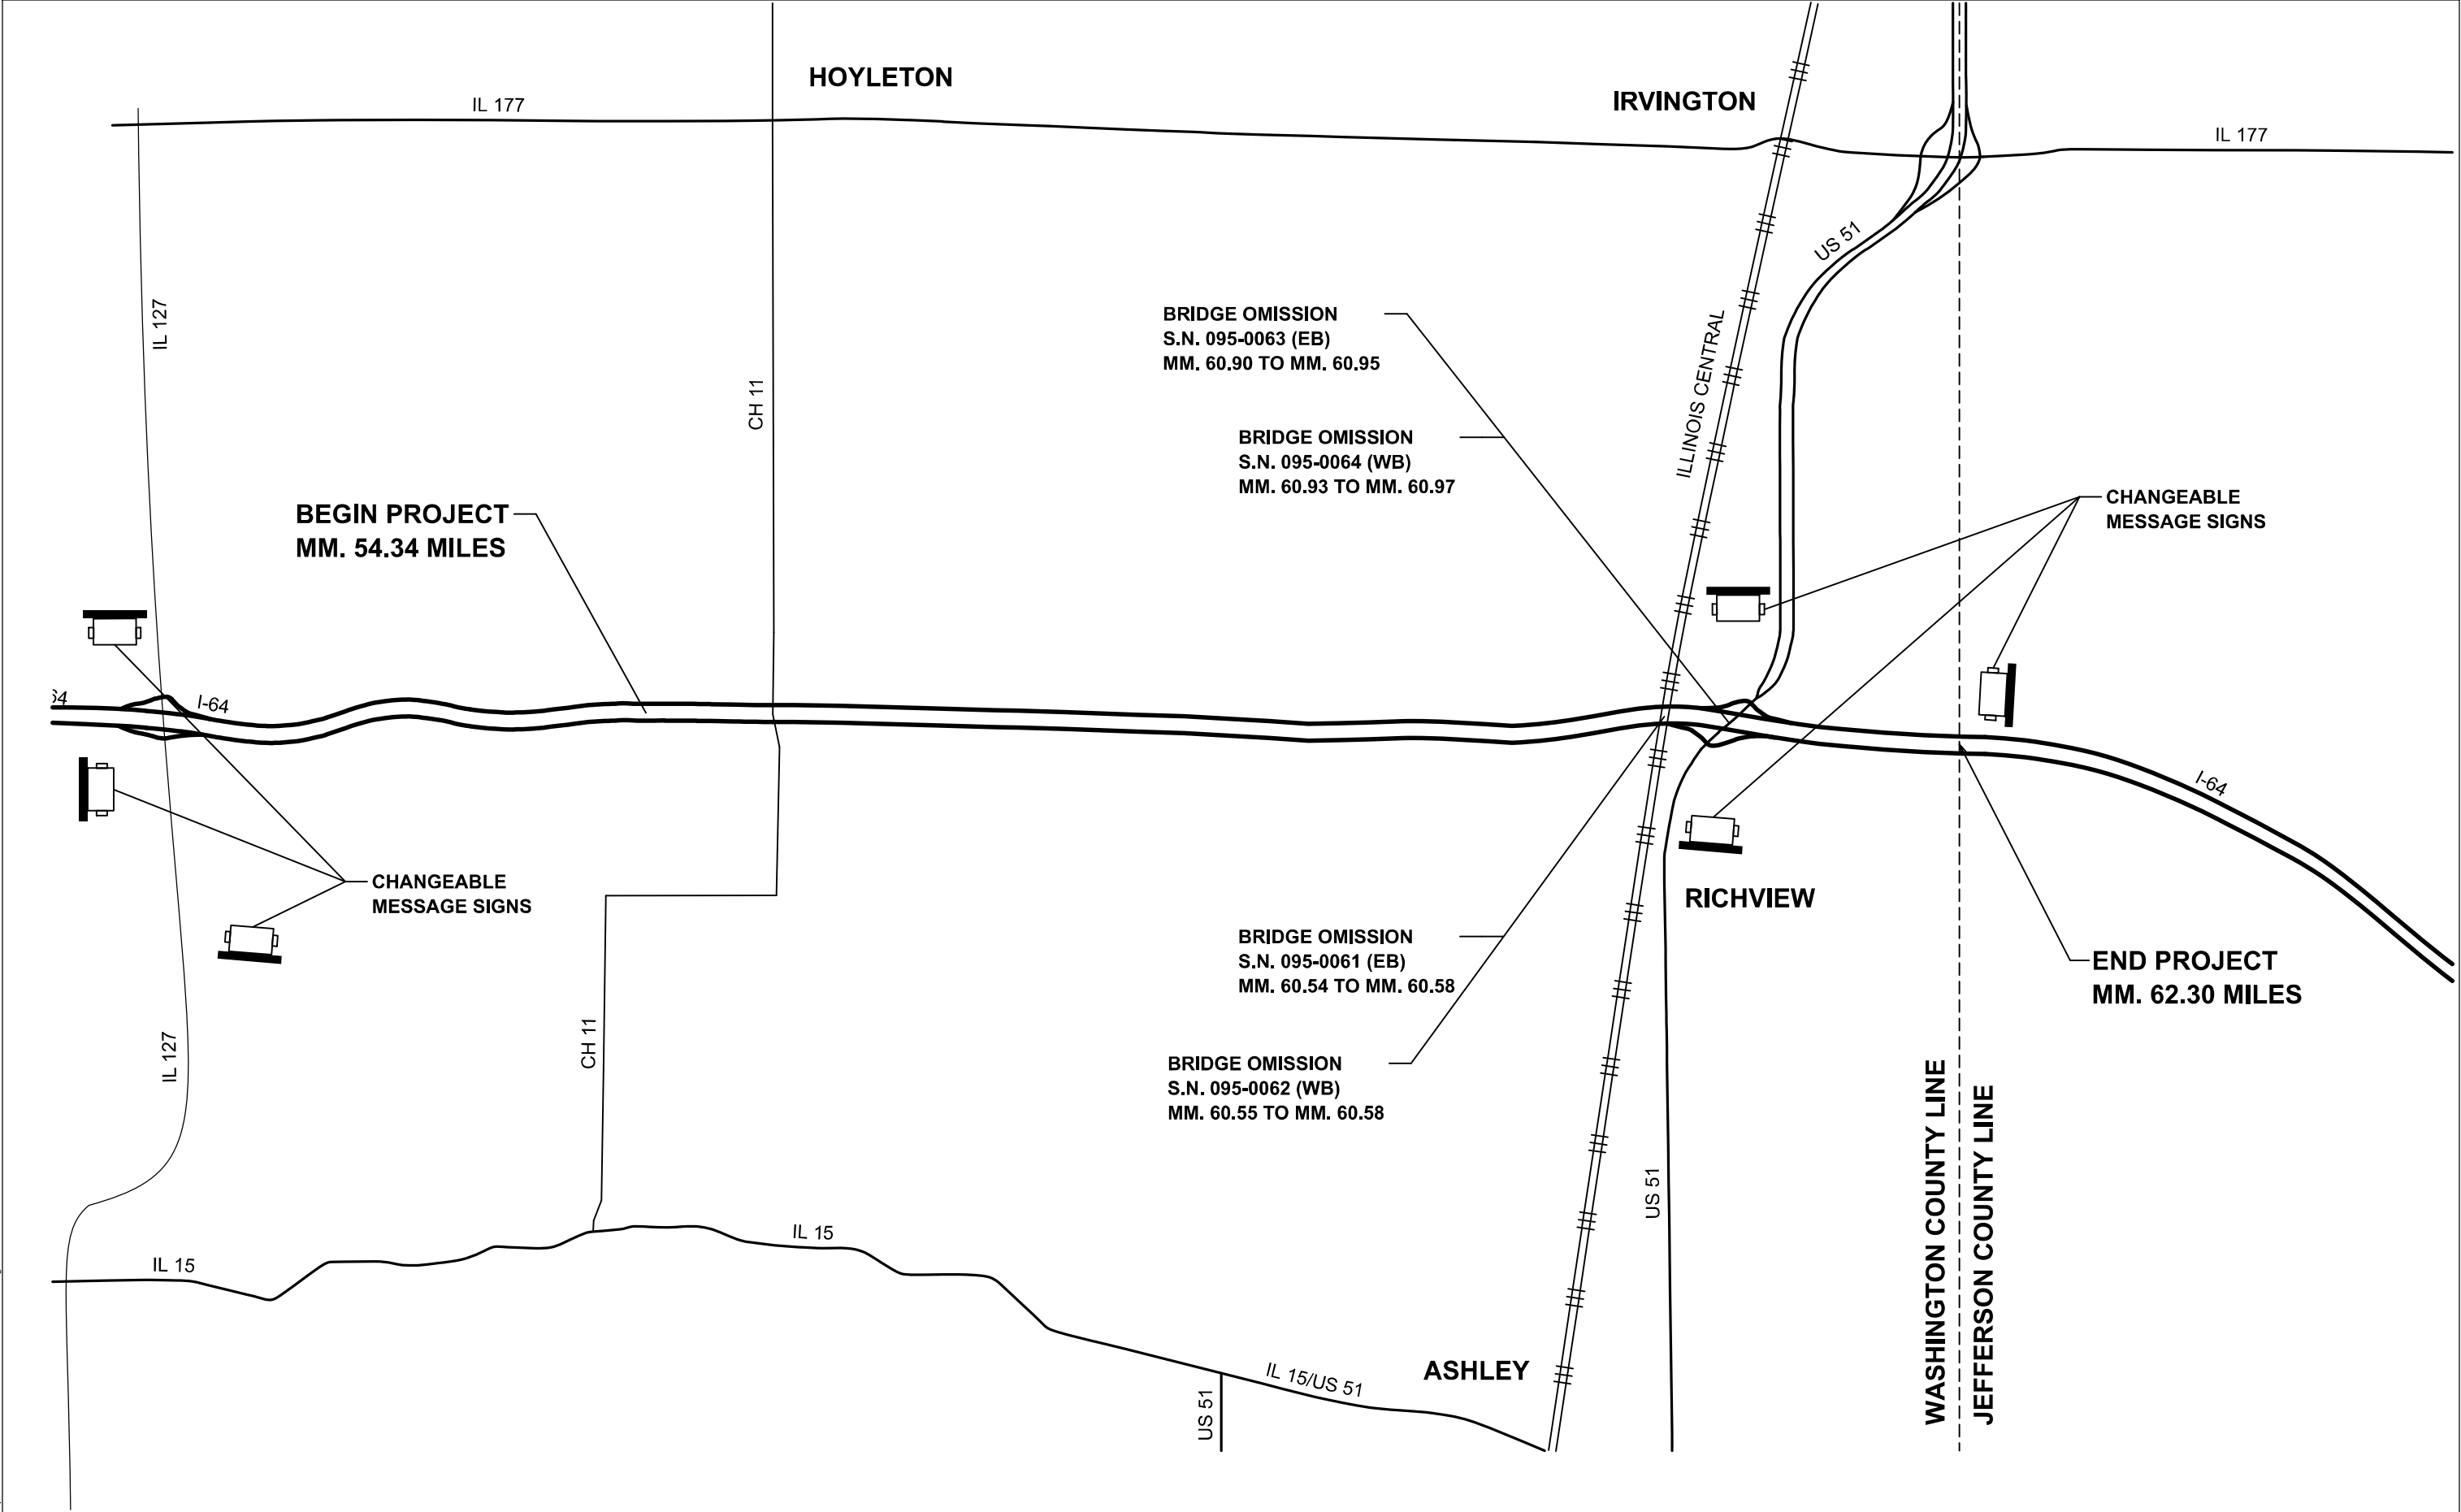

MODEL: Location Map (Sheet)
FILE NAME: c:\p\work\p\work\simam\1042651\0876\29-shr-details.dgn

USER NAME	= Meseret.sima	DESIGNED	-	REVISED	-
		DRAWN	-	REVISED	-
		CHECKED	-	REVISED	-
PLOT DATE	= 12/2/2024	DATE	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

LOCATION MAP

SCALE: SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
064	95-(5,6)PP-3	WASHINGTON	16	16
CONTRACT NO.76U29				
		ILLINOIS	FED. AID PROJECT	