

with the steel retainer plate.

NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) 1''x7''x10'' steel P to the
top layer of couplers with 2-5g'' \$\phi\$ bolts
screwed to coupler at approximate \$\mathbb{Q}\$ of
each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1''x7''x 10'' steel ${\mathbb R}$ to the concrete slab or concrete wearing surface with $2^{-5}8''$ ϕ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate ${\mathfrak L}$ of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier.


The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM


*** Dimension shown is minimum required embedment into concrete.

If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

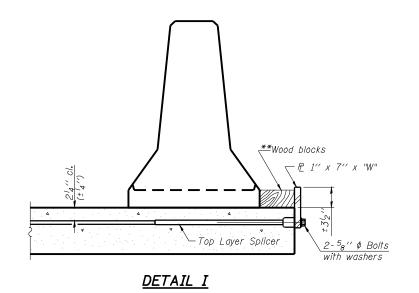

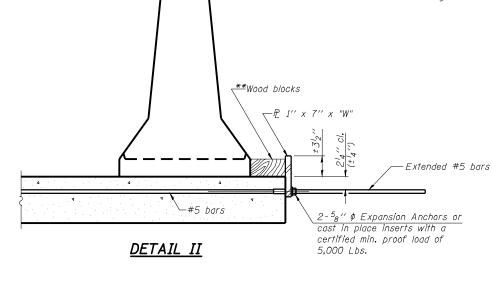

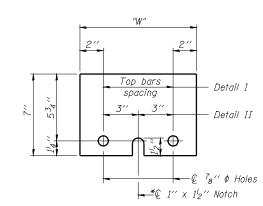

STEEL RETAINER & 1" x 7" x 10"

* Required only with Detail II

** Wood blocks may be omitted when required to provide
minimum stage traffic lane width. When the wood blocks
are omitted, the concrete barrier shall be in direct contact

"W" = Top bars spacing + 4"

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NO. 001-0055 & 0056

SHEET NO.12	F.A. RTE.	SECTION				COUNTY	TOTAL SHEETS	SHEET NO.
	172	1-4B				ADAMS	165	130
16 SHEETS						CONTRACT	NO. 72	A09
	FED. RO	DAD DIST	. NO.	ILLINOIS	FED. A	AID PROJECT		

KLINGNER 8 ASSOCIATES, P.C.

STATE OF ILLINOIS DESIGN FIRM * 1842738

R-27 11-1-09

DESIGNED KTH

 CHECKED
 ADL

 DRAWN
 KTH

 CHECKED
 ADL

Klingner & Associates P.C.