

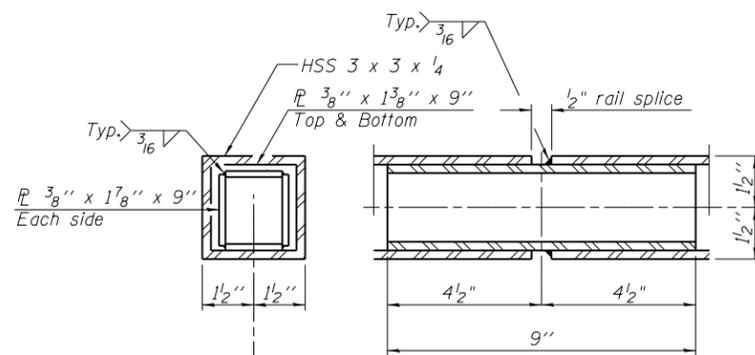


NOTES

All post, railing, pickets, splices, and anchor devices shall be galvanized and powder coated black per the Special Provisions. The galvanizing and powder coating system shall be approved by the engineer prior to the coating process. The galvanizing and powder coating shall be paid for as Painting Steel Railing.

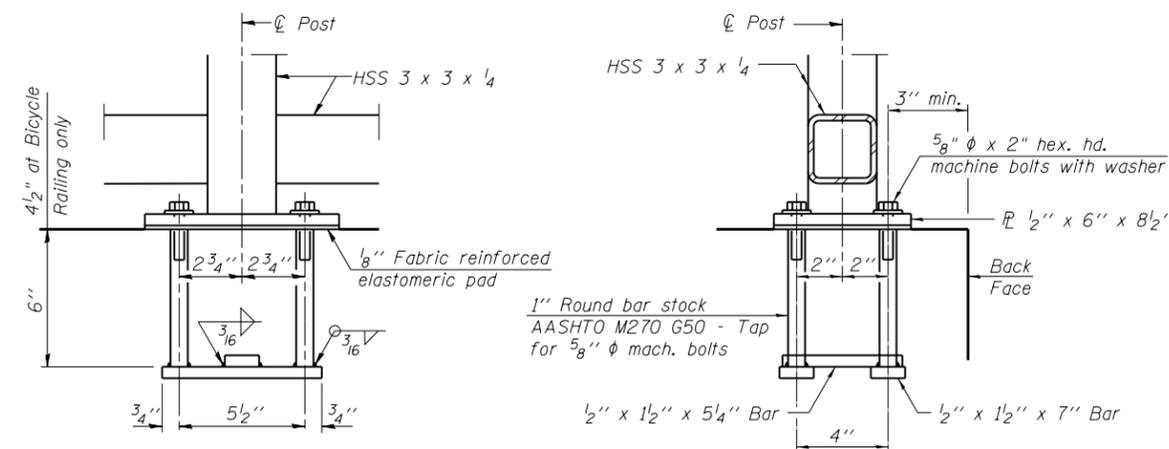

Rail Splice Spacing = 35'-0" Maximum.

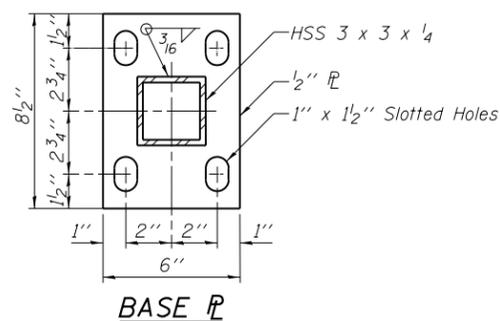

In lieu of the cast-in-place anchor device shown, the Contractor has the option of drilling and setting 5/8" \varnothing anchor rods according to Article 509.06 of the Standard Specifications. Embedment shall be according to the manufacturer's specifications, but no greater than 6".

BILL OF MATERIAL

Code No.	Item	Unit	Quantity
50600200	Painting Steel Railing	Foot	138
50900805	Pedestrian Railing	Foot	138

HRGreen
PROJECT CONTACT: Dave Maxwell
DATE PLOTTED: 10/29/2012 10:56:57 AM
FILE NAME: 10264821-shr-railing_details.dgn
PLOT DRIVER: pdfcut
PEN TABLE: Struct.tbl



USER NAME = whood	DESIGNED - MGH	REVISED -
	CHECKED - KJB	REVISED -
PLOT SCALE =	DRAWN - WJH	REVISED -
PLOT DATE = 10/29/2012	CHECKED - MGH	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

RAILING DETAILS
STRUCTURE NO. 101-6110

SHEET NO. 3 OF 3 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
742	(32, 33) R-1	WINNEBAGO	705	551
CONTRACT NO. 64821				

ILLINOIS FED. AID PROJECT