

**EAST EDGE OF SHOULDER**


Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Aprpr. Slab	842+14.39	-22.00	643.76
A1	842+24.39	-22.00	643.78
A2	842+34.39	-22.00	643.80
S. End of N. Aprpr. Slab	842+44.39	-22.00	643.82

**EAST EDGE OF PAVEMENT**

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Aprpr. Slab	842+20.16	-12.00	643.98
A1	842+30.16	-12.00	644.00
A2	842+40.16	-12.00	644.02
S. End of N. Aprpr. Slab	842+50.16	-12.00	644.03

**☉ ROADWAY & PROFILE GRADE (N.B.)**

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Aprpr. Slab	842+27.09	0.00	644.18
A1	842+37.09	0.00	644.20
A2	842+47.09	0.00	644.22
S. End of N. Aprpr. Slab	842+57.09	0.00	644.23

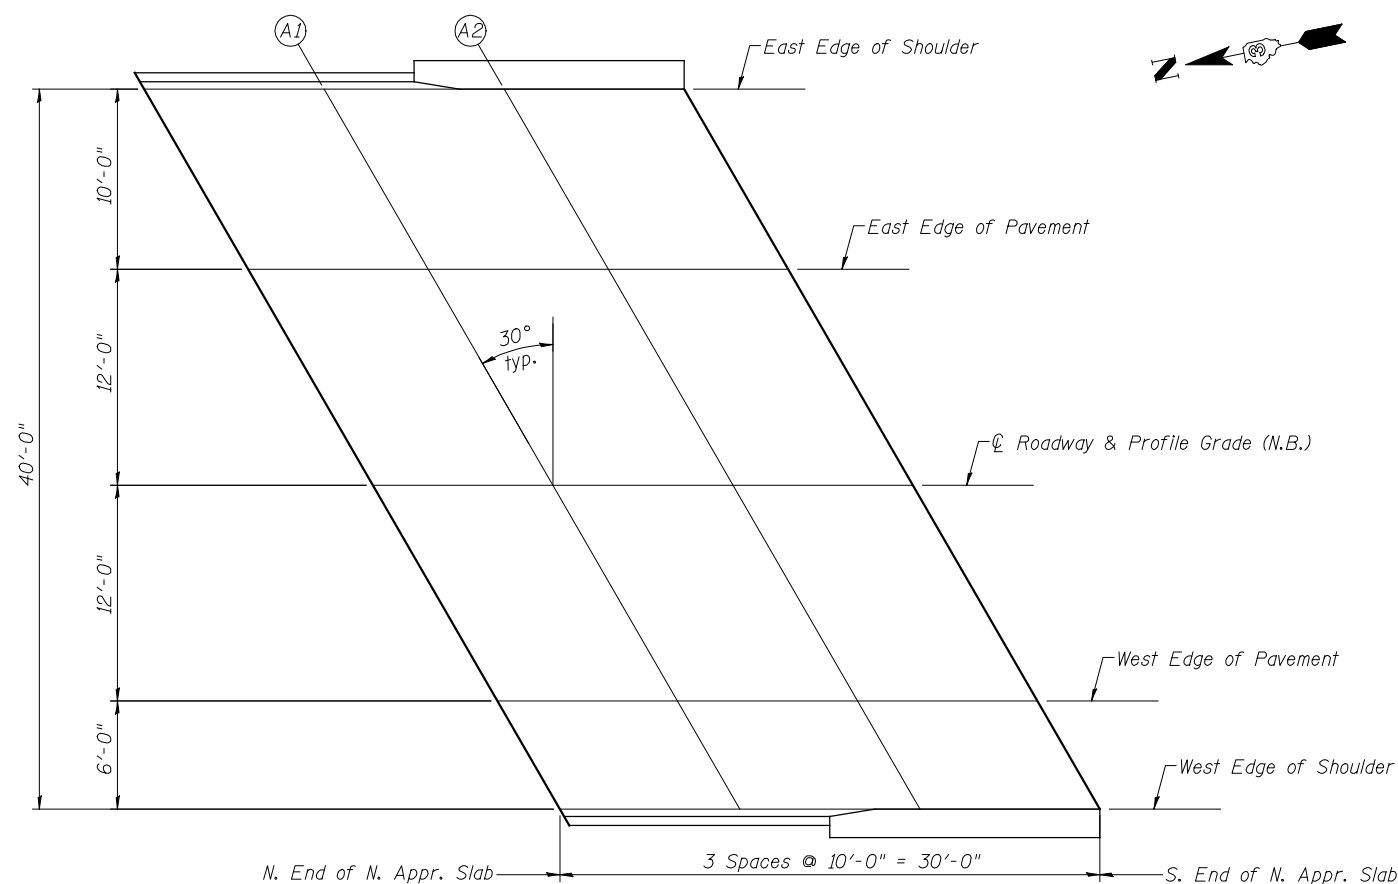

**PLAN**

North Approach (N.B.)

\* Offsets are measured from ☉ Roadway & PGL (N.B.)


**WEST EDGE OF PAVEMENT**

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Aprpr. Slab	842+34.02	12.00	644.01
A1	842+44.02	12.00	644.02
A2	842+54.02	12.00	644.04
S. End of N. Aprpr. Slab	842+64.02	12.00	644.05

**WEST EDGE OF SHOULDER**

Location	Station	* Offset (ft.)	Theoretical Grade Elevations
N. End of N. Aprpr. Slab	842+37.48	18.00	643.89
A1	842+47.48	18.00	643.90
A2	842+57.48	18.00	643.91
S. End of N. Aprpr. Slab	842+67.48	18.00	643.92

**KEY PLAN**

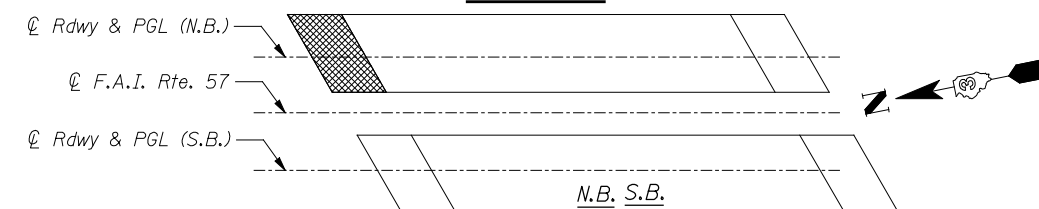

1/28/2013 4:45:57 PM 038021E\_66944\_011\_APPRELV\_01.dgn



DESIGNED	BJM	REVISED	
CHECKED	TAY	REVISED	
DRAWN	MWS	REVISED	
CHECKED	BJM	REVISED	

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**TOP OF NORTH APPROACH SLAB ELEVATIONS  
STRUCTURE NO. 038-0216 (N.B.)**

SHEET NO. 11 OF 38 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	141 BR(SB) & 38-1 BR(NB)	IROQUOIS	138	49

CONTRACT NO. 66944  
ILLINOIS FED. AID PROJECT