ROUTE NO	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 855 C.H. 7	10-00076 -00-RS	MONROE	6	3

FEDERAL AID PROJECT
CONTRACT 97511

PAVEMENT MARKINGS

STATION	PAINT: SKIP-DASH YELLOW 4" (FT) CENTERLINE	SOLID YELLOW 4" NO PASSING ZONE LT	SOLID YELLOW 4" NO PASSING ZONE RT	SOLID WHITE 4" (FT) EDGELINES	REFLECTIVE PAVEMENT MARKER AMBER 2-WAY (EACH)
211+09 TO 219+53	210	--	--	1688	9
219+53 TO 226+94	180	--	741	1482	9
226+94 TO 230+41	80	--	--	694	4
230+41 TO 233+47	70	306	--	612	4
233+47 TO 237+57	--	410	410	820	5
237+57 TO 244+38	170	--	681	1362	8
244+38 TO 257+58	--	1320	1320	2640	16
257+58 TO 268+69	270	1111	--	2139	14
268+69 TO 269+81	20	--	--	224	1
269+81 TO 277+05	180	--	724	1448	9
277+05 TO 281+24	100	--	--	838	5
281+24 TO 286+64	130	540	--	1004	7
286+64 TO 304+99	450	--	--	3595	23
304+99 TO 315+34	250	--	1035	2070	13
315+34 TO 318+35	--	301	301	602	4
318+35 TO 326+91	210	856	--	1712	11
326+91 TO 329+05	--	214	214	428	3
329+05 TO 337+58	210	--	853	1706	11
337+58 TO 338+17	--	59	59	118	1
338+17 TO 348+98	270	1081	--	2162	13
348+98 TO 358+54	230	--	--	1912	12
358+54 TO 371+39	320	--	1285	2570	16
371+39 TO 378+45	--	706	706	1412	9
378+45 TO 389+56	270	1111	--	2222	14
389+56 TO 396+26	160	--	--	1159	8
396+26 TO 405+44	220	--	918	1836	12
405+44 TO 407+55	50	--	--	422	3
407+55 TO 416+45	220	890	--	1780	4
416+45 TO 419+56	70	--	--	622	11
419+56 TO 426+86	180	--	730	1460	9
426+86 TO 430+82	90	--	--	792	5
430+82 TO 437+91	170	709	--	1418	9
437+91 TO 438+49	10	--	--	116	1
438+49 TO 448+65	250	--	1016	1860	13
448+65 TO 481+46	--	3281	3281	6562	40
SUBTOTALS	5,040	12,895	14,274	53,487	338
TOTALS	85,696				338

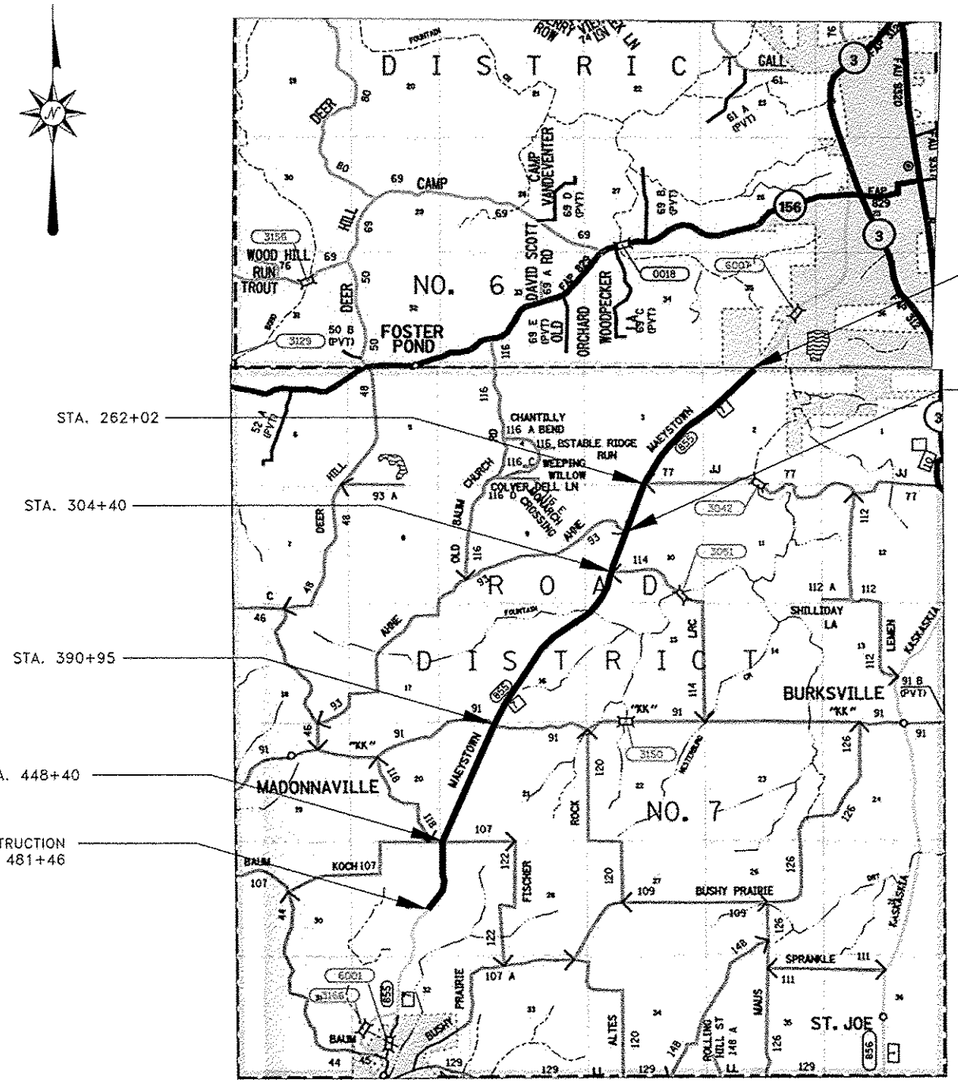

MAEYSTOWN ROAD RESURFACING
LOCATION MAP AND
PAVEMENT MARKINGS
SEC 10-00076-00-RS
MONROE COUNTY, ILLINOIS

DRAWING FILE: S:\COUNTY PROJECTS\MAEYSTOWN ROAD RESURFACING 2012\SDEROAD.DWG