


ROUTE NO	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 855 C.H. 7	10-00076 -00-RS	MONROE	6	4

FEDERAL AID PROJECT
CONTRACT 97511

MAINLINE SURFACING SUMMARY

LOCATION STATION - STATION	HOT-MIX ASPHALT SURFACE COURSE, MIX "D" N70	LEVELING BINDER MIX "C" N50	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	AGGREGATE SHOULDERS	BITUMINOUS MATERIALS (PRIME COAT)	AGGREGATE (PRIME COAT)
UNIT	TON	TON	SQ YD	TON	GAL	TON
STA. 211+09 TO STA. 481+46	5679	2895	440	2220	6610	198
PROJECT TOTALS	5679	2895	440	2220	6610	198

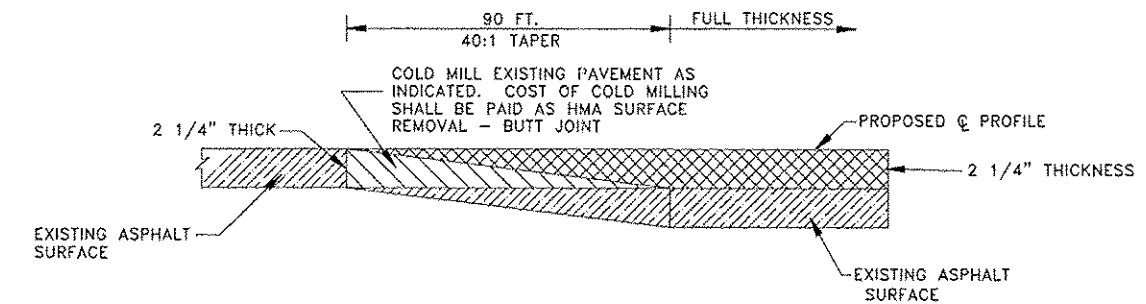


ASPHALT TAPER/BUTT JOINT DETAIL

STA. 211+09 TO STA. 211+99
STA. 480+56 TO STA. 481+46

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

LOCATION(S)	ALL		
MIXTURE USE(S)	SURFACE	LEVELING BINDER	INCIDENTAL
AC/PG	PG 64-22	PG 64-22	PG 64-22
RAP % (MAX)	10%	15%	15%
DESIGN AIR VOIDS	4.0% @ Ndes=70	4.0% @ Ndes=50	4.0% @ Ndes=70
MIXTURE COMPOSITION (GRADATION MIXTURE)	9.5		
FRICTION AGGREGATE	MIXTURE D	MIXTURE C	MIXTURE D

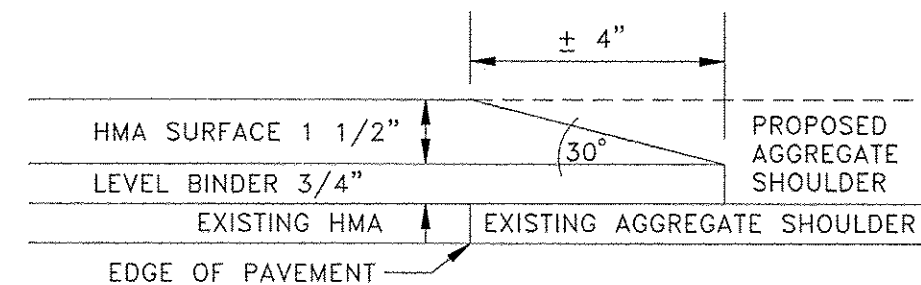

SAFETY EDGE

TYPICAL BOTH SIDES
STA. 211+09 TO STA. 481+46

DRAWING FILE: S:\COUNTY PROJECTS\MAEYSTOWN ROAD RESURFACING 2012\SIDEROAD.DWG

MAEYSTOWN ROAD RESURFACING
DETAILS AND SCHEDULES
SEC 10-00076-00-RS
MONROE COUNTY, ILLINOIS