



TWO-WAY LEFT TURN





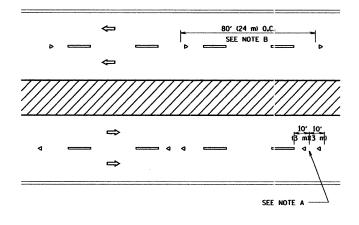

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE
- 2. WARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

SYMBOLS

- --- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE WARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

MINIMUM OF 3 W EQUALLY SPACED ___ 3 @ 80' (24 m) O.C. 40' (12 m) \Rightarrow 40' (12 m) 0.C. 40' (12 m) O.C. * SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE ** WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS USE TWO-WAY MARKERS.

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED - T. RAMMACHER 09-19-94		TYPICAL APPLICATIONS	F.A.U. SECTION	N COUNTY SHEETS NO.
W:\diststd\22x34\tell.dgn		DRAWN -	REVISED - T. RAMMACHER 03-12-99	STATE OF ILLINOIS		2706 BY-RS-2	LAKE 37 32
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED - T. RAMMACHER 01-06-00	DEPARTMENT OF TRANSPORTATION	RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)	TC-11	CONTRACT NO.
	PLOT DATE = 1/4/2008	DATE -	REVISED -		SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.		INOIS FED. AID PROJECT