

80' (24 m) 0.C.


SEE NOTE B

40' (12 m) 0.C.

5 m)(3 m)

SEE NOTE A

MULTI-LANE/UNDIVIDED

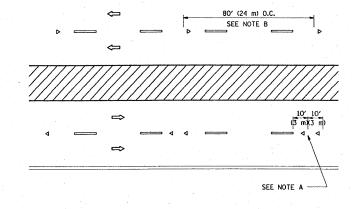

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

SYMBOLS


- ---- YELLOW STRIPE
- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ◆ TWO-WAY AMBER MARKER

■ ONE-WAY CRYSTAL MARKER (W/O)

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINFS.
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

MULTI-LANE/DIVIDED

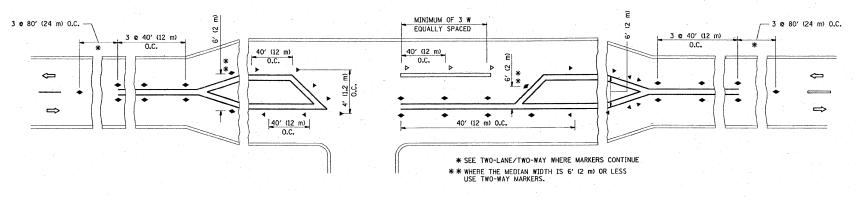

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = MOSSSE	DESIGNED -	REVISED - T. RAMMACHER 09-19-94		TYPICAL APPLICATIONS	F.A. I. RTE.	SECTION	COUNTY	TOTAL	SHEET NO.
c:\pw_work\PWIDOT\MOSSSE\d0136567\DistS	Std.dgn	DRAWN -	REVISED - T. RAMMACHER 03-12-99	STATE OF ILLINOIS	RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)	55	22-1AC-RS-3	WILL	12	10
	PLOT SCALE = 50.0000 '/ IN.	CHECKED -	REVISED -T. RAMMACHER 01-06-00	DEPARTMENT OF TRANSPORTATION			TC-11	CONTRACT	NO. 6	00HC
	PLOT DATE = 4/17/2009	DATE -	REVISED -		SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED. ROAD DI	ST. NO. 1 ILLINOIS FED. AI	D PROJECT		